

Maryland Historical Trust

Maryland Inventory of Historic Properties Number: F-7-133

Name: 10086/MD 355 over Bennett Creek

The bridge referenced herein was inventoried by the Maryland State Highway Administration as part of the Historic Bridge Inventory, and SHA provided the Trust with eligibility determinations in February 2001. The Trust accepted the Historic Bridge Inventory on April 3, 2001. The bridge received the following determination of eligibility.

MARYLAND HISTORICAL TRUST	
Eligibility Recommended _____	Eligibility Not Recommended <u> X </u>
Criteria: <u> A </u> <u> B </u> <u> C </u> <u> D </u>	Considerations: <u> A </u> <u> B </u> <u> C </u> <u> D </u> <u> E </u> <u> F </u> <u> G </u> <u> None </u>
Comments: _____ _____ _____	
Reviewer, OPS: <u> Anne E. Bruder </u>	Date: <u> 3 April 2001 </u>
Reviewer, NR Program: <u> Peter E. Kurtze </u>	Date: <u> 3 April 2001 </u>

27/04

MARYLAND INVENTORY OF HISTORIC BRIDGES
HISTORIC BRIDGE INVENTORY
MARYLAND STATE HIGHWAY ADMINISTRATION/
MARYLAND HISTORICAL TRUST

MHT No. F-7-133

SHA Bridge No. 10086 Bridge name MD 355 over Bennett Creek

LOCATION:

Street/Road name and number [facility carried] MD 355 (Urbana Pike)

City/town Urbana Vicinity X

County Frederick

This bridge projects over: Road Railway Water Land

Ownership: State County Municipal Other

HISTORIC STATUS:

Is the bridge located within a designated historic district? Yes No

National Register-listed district National Register-determined-eligible district

Locally-designated district Other

Name of district _____

BRIDGE TYPE:

Timber Bridge _____:

Beam Bridge _____ Truss -Covered Trestle Timber-And-Concrete

Stone Arch Bridge _____

Metal Truss Bridge _____

Movable Bridge _____:

Swing _____ Bascule Single Leaf Bascule Multiple Leaf _____

Vertical Lift _____ Retractable _____ Pontoon _____

Metal Girder _____:

Rolled Girder _____ Rolled Girder Concrete Encased _____

Plate Girder _____ Plate Girder Concrete Encased _____

Metal Suspension _____

Metal Arch _____

Metal Cantilever _____

Concrete :

Concrete Arch _____ Concrete Slab Concrete Beam Rigid Frame _____

Other _____ Type Name _____

DESCRIPTION:

Setting: Urban _____ Small town _____ Rural X

Describe Setting:

Bridge No. 10086 carries MD 355 (Urbana Pike) over Bennett Creek in Frederick County. MD 355 runs north-south and Bennett Creek flows east-west. The bridge is located in the vicinity of Urbana, and is surrounded by farmland.

Describe Superstructure and Substructure:

Bridge No. 10086 is a 2-span, 2-lane, concrete beam bridge. The bridge was originally built in 1924. The south span is a concrete beam span 40 feet long, and the north span is a concrete slab span 24 feet long. In 1984, the original concrete slab span was removed and replaced with a new concrete slab span. In addition, a new southwest wing wall was constructed sometime after 1991. The structure is 67 feet, 11 inches long and has a clear roadway width of 28 feet, 10 inches; there are no sidewalks. The out-to-out width is 30 feet, 8 inches. The superstructure consists of five (5) T-beams which support a concrete deck and steel guard rails. The beams measure 15 inches x 24 inches and are spaced 4 feet, 10 inches apart. The concrete deck, an integral part of the T-beams, is 9 inches thick and it has a bituminous wearing surface. The structure has solid concrete parapets on the concrete beam span, and steel guard rails on the concrete slab span. The roadway approaches have narrow shoulders and steel guard rails. The substructure consists of two (2) concrete abutments and a concrete intermediate pier, 40 feet from the south abutment. There are flared concrete wing walls. The bridge is not posted, and has a sufficiency rating of 73.6.

According to the 1996 inspection report, this structure was in good condition with some areas of cracking, scaling, and spalling. The asphalt wearing surface has several layers of overlay, and there are minor cracks at the abutments. The concrete is in good condition. There are areas of cracking, light scaling and spalling, with spot rusting on the concrete beams. The 1924 span has areas of efflorescence, while the 1984 span has heavy efflorescence and many cracks. Also, the concrete parapets have areas of scaling and exposed aggregate.

Discuss Major Alterations:

In 1984, the north concrete slab span was removed and replaced with a new concrete slab span. In addition, a new southwest wing wall was constructed sometime after 1991. Inspection reports from 1991 detail the collapse of part of the southwest wing wall into the creek. The inspection report from 1996 indicates the southwest wing wall was removed and replaced, and other areas of the bridge have had repairs and patches.

HISTORY:

WHEN was the bridge built: 1924

This date is: Actual X Estimated _____

Source of date: Plaque _____ Design plans X County bridge files/inspection form _____

Other (specify): State Highway Administration bridge files/inspection form

WHY was the bridge built?

The bridge was constructed in response to the need for a more efficient transportation network and increased load capacity.

WHO was the designer?

State Roads Commission

WHO was the builder?

State Roads Commission

WHY was the bridge altered?

The bridge was altered to correct functional or structural deficiencies.

Was this bridge built as part of an organized bridge-building campaign?

There is no evidence that the bridge was built as part of an organized bridge building campaign.

SURVEYOR/HISTORIAN ANALYSIS:**This bridge may have National Register significance for its association with:**

A - Events _____ B- Person _____
C- Engineering/architectural character _____

The bridge does not have National Register significance.

Was the bridge constructed in response to significant events in Maryland or local history?

The earliest concrete beam bridges in the nation were deck girder spans that featured concrete slabs supported by a series of longitudinal concrete beams. This method of construction was conceptually quite similar to the traditional timber beam bridge which had found such widespread use both in Europe and in America. Developed early in the twentieth century, deck girder spans continued to be widely used in 1920 when noted bridge engineer Milo Ketchum wrote *The Design of Highway Bridges of Steel, Timber and Concrete* (Ketchum 1920).

Although visually similar to deck girder bridges, the T-beam span features a series of reinforced concrete beams that are integrated into the concrete slab, forming a monolithic mass appearing in cross section like a series of upper-case "T"s connected at the top. Thaddeus Hyatt is believed to have been the first to come upon the idea of the T-beam when he was studying reinforced concrete in the 1850s, but the first useful T-beam was developed by the Belgian Francois Hennebique at the turn of the present century (Lay 1992:293). The earliest references to T-beam bridges refer to the type as concrete slab and beam construction, a description that does not distinguish the T-beam design from the concrete deck girder. Henry G. Tyrrell was perhaps the first American bridge engineer to use the now standard term "T-beam" in his treatise *Concrete Bridges and Culverts*, published in 1909. Tyrrell commented that "it is permissible and good practice in designing small concrete beams which are united by slabs, to consider the effect of a portion of the floor slab and to proportion the beams as T-beams" (Tyrrell 1909:186).

By 1920, reinforced concrete, T-beam construction had found broad application in standardized bridge design across the United States. In his text, *The Design of Highway Bridges of Steel, Timber and Concrete*, Milo S. Ketchum included drawings of standard T-beam spans recommended by the U.S. Bureau of Public Roads as well as drawings of T-beam bridges built by state highway

departments in Ohio, Michigan, Illinois, and Massachusetts (Ketchum 1920). By the 1930s the T-beam bridge was widely built in Maryland and Virginia.

Maryland's roads and bridge improvement programs mirrored economic cycles. The first road improvement of the State Roads Commission was a 7 year program, starting with the Commission's establishment in 1908 and ending in 1915. Due to World War I, the period from 1916-1920 was one of relative inactivity; only roads of first priority were built. Truck traffic resulting from war related factories and military installations generated new, heavy traffic unanticipated by the builders of the early road system. From 1920-1929, numerous highway improvements occurred in response to the increase in Maryland motor vehicles from 103,000 in 1920 to 320,000 in 1929, with emphasis on the secondary system of feeder roads which moved traffic from the primary roads built before World War I. After World War I, Maryland's bridge system also was appraised as too narrow and structurally inadequate for the increasing traffic, with plans for an expanded bridge program to be handled by the Bridge Division, set up in 1920. In 1920 under Chapter 508 of the Acts of 1920 the State issued a bond of \$3,000,000.00 for road construction; the primary purpose of these monies was to meet the state obligations involving the construction of rural post roads. The secondary purpose of these monies was to fund (with an equal sum from the counties) the building of lateral roads. The number of hard surfaced roads on the state system grew from 2000 in 1920 to 3200 in 1930. By 1930, Maryland's primary system had been inadequate to the huge freight trucks and volume of passenger cars in use, with major improvements occurring in the late 1930's. Most improvements to local roads waited until the years after World War I.

In the early years, there was a need to replace the numerous single lane timber bridges. Walter Wilson Crosby, Chief Engineer, stated in 1906, "the general plan has been to replace these [wood bridges] with pipe culverts or concrete bridges and thus forever do away with the further expense of the maintenance of expensive and dangerous wooden structures." Within a few years, readily constructed standardized bridges of concrete were being built throughout the state.

In 1930, the roadway width for all standard plan bridges was increased to 27 feet in order to accommodate the increasing demands of automobile and truck traffic (State Roads Commission 1930). The range of span lengths remained the same, but there were some changes designed to increase the load bearing capacities. The reinforcing bars increased in thickness. Visually, the 1930 design can be distinguished from its predecessors by the pierced concrete railing that was introduced at this time.

In 1933, a new set of standard plans were introduced by the State Roads Commission. This time their preparation was not announced in the Report; new standard plans were by this time nothing special - they had indeed become standard. Once again accommodating the ever-increasing demands of traffic, the roadway was increased, this time to 30 feet. The slab span's reinforcing bars remained the same diameter but were placed closer together to achieve still more load capacity.

When the bridge was built and/or given a major alteration, did it have a significant impact on the growth and development of the area?

There is no evidence that the construction of this bridge had a significant impact on the growth and development of this area.

Is the bridge located in an area which may be eligible for historic designation and would the bridge add to or detract from the historic/visual character of the potential district?

The bridge is located in an area which does not appear to be eligible for historic designation.

Is the bridge a significant example of its type?

A significant example of a concrete beam bridge should possess character-defining elements of its type, and be readily recognizable as an historic structure from the perspective of the traveler. The integrity of distinctive features visible from the roadway approach, including parapet walls or railings, is important in structures which are common examples of their type. In addition, the structure must be in excellent condition. This bridge has some areas of deterioration, and is an undistinguished example of a concrete beam bridge.

Does the bridge retain integrity of important elements described in Context Addendum?

The bridge retains the character-defining elements of its type, as defined by the Statewide Historic Bridge Context, including the original beams, abutments, pier, and parapets, however some deterioration is evident.

Is the bridge a significant example of the work of a manufacturer, designer, and/or engineer?

This bridge is not a significant example of the work of a manufacturer, designer, and/or engineer.

Should the bridge be given further study before an evaluation of its significance is made?

No further study of this bridge is required to evaluate its significance.

BIBLIOGRAPHY:

County inspection/bridge files _____ SHA inspection/bridge files X
Other (list):

Ketchum, Milo S.

1908 *The Design of Highway Bridges and the Calculation of Stresses in Bridge Trusses.* The Engineering News Publishing Co., New York.

1920 *The Design of Highway Bridges of Steel, Timber and Concrete.* Second edition. McGraw-Hill Book Company, New York.

Lay, Maxwell Gordon

1992 *Ways of the World: A History of the World's Roads and of the Vehicles That Used Them.* Rutgers University Press, New Brunswick, New Jersey.

Luten, Daniel B.

1912 Concrete Bridges. *American Concrete Institute Proceedings* 8:631-640.

1917 *Reinforced Concrete Bridges.* National Bridge Company, Indianapolis, Indiana.

Maryland State Roads Commission

1930a *Report of the State Roads Commission for the Years 1927, 1928, 1929 and 1930.* State of Maryland, State Roads Commission, Baltimore.

1930b *Standard Plans.* State of Maryland, State Roads Commission, Baltimore.

Taylor, Frederick W., Sanford E. Thompson, and Edward Smulski

1939 *Reinforced-Concrete Bridges with Formulas Applicable to Structural Steel and Concrete*. John Wiley & Sons, Inc., New York.

Tyrrell, H. Grattan

1909 *Concrete Bridges and Culverts for Both Railroads and Highways*. The Myron C. Clark Publishing Company, Chicago and New York.

SURVEYOR:

Date bridge recorded 2/25/97

Name of surveyor Caroline Hall/Ryan McKay

Organization/Address P.A.C. Spero & Co., 40 W. Chesapeake Avenue, Baltimore, MD 21204

Phone number (410) 296-1685

FAX number (410) 296-1670

Maryland Historic Highway Bridges

Bridge Type CONCRETE BEAM


MHT # F-7-133

Map BARNESVILLE D-9 / DAMASCUS D-10

County FREDERICK

Bridge # and name 10086

MD 355 OVER BENNETT CREEK

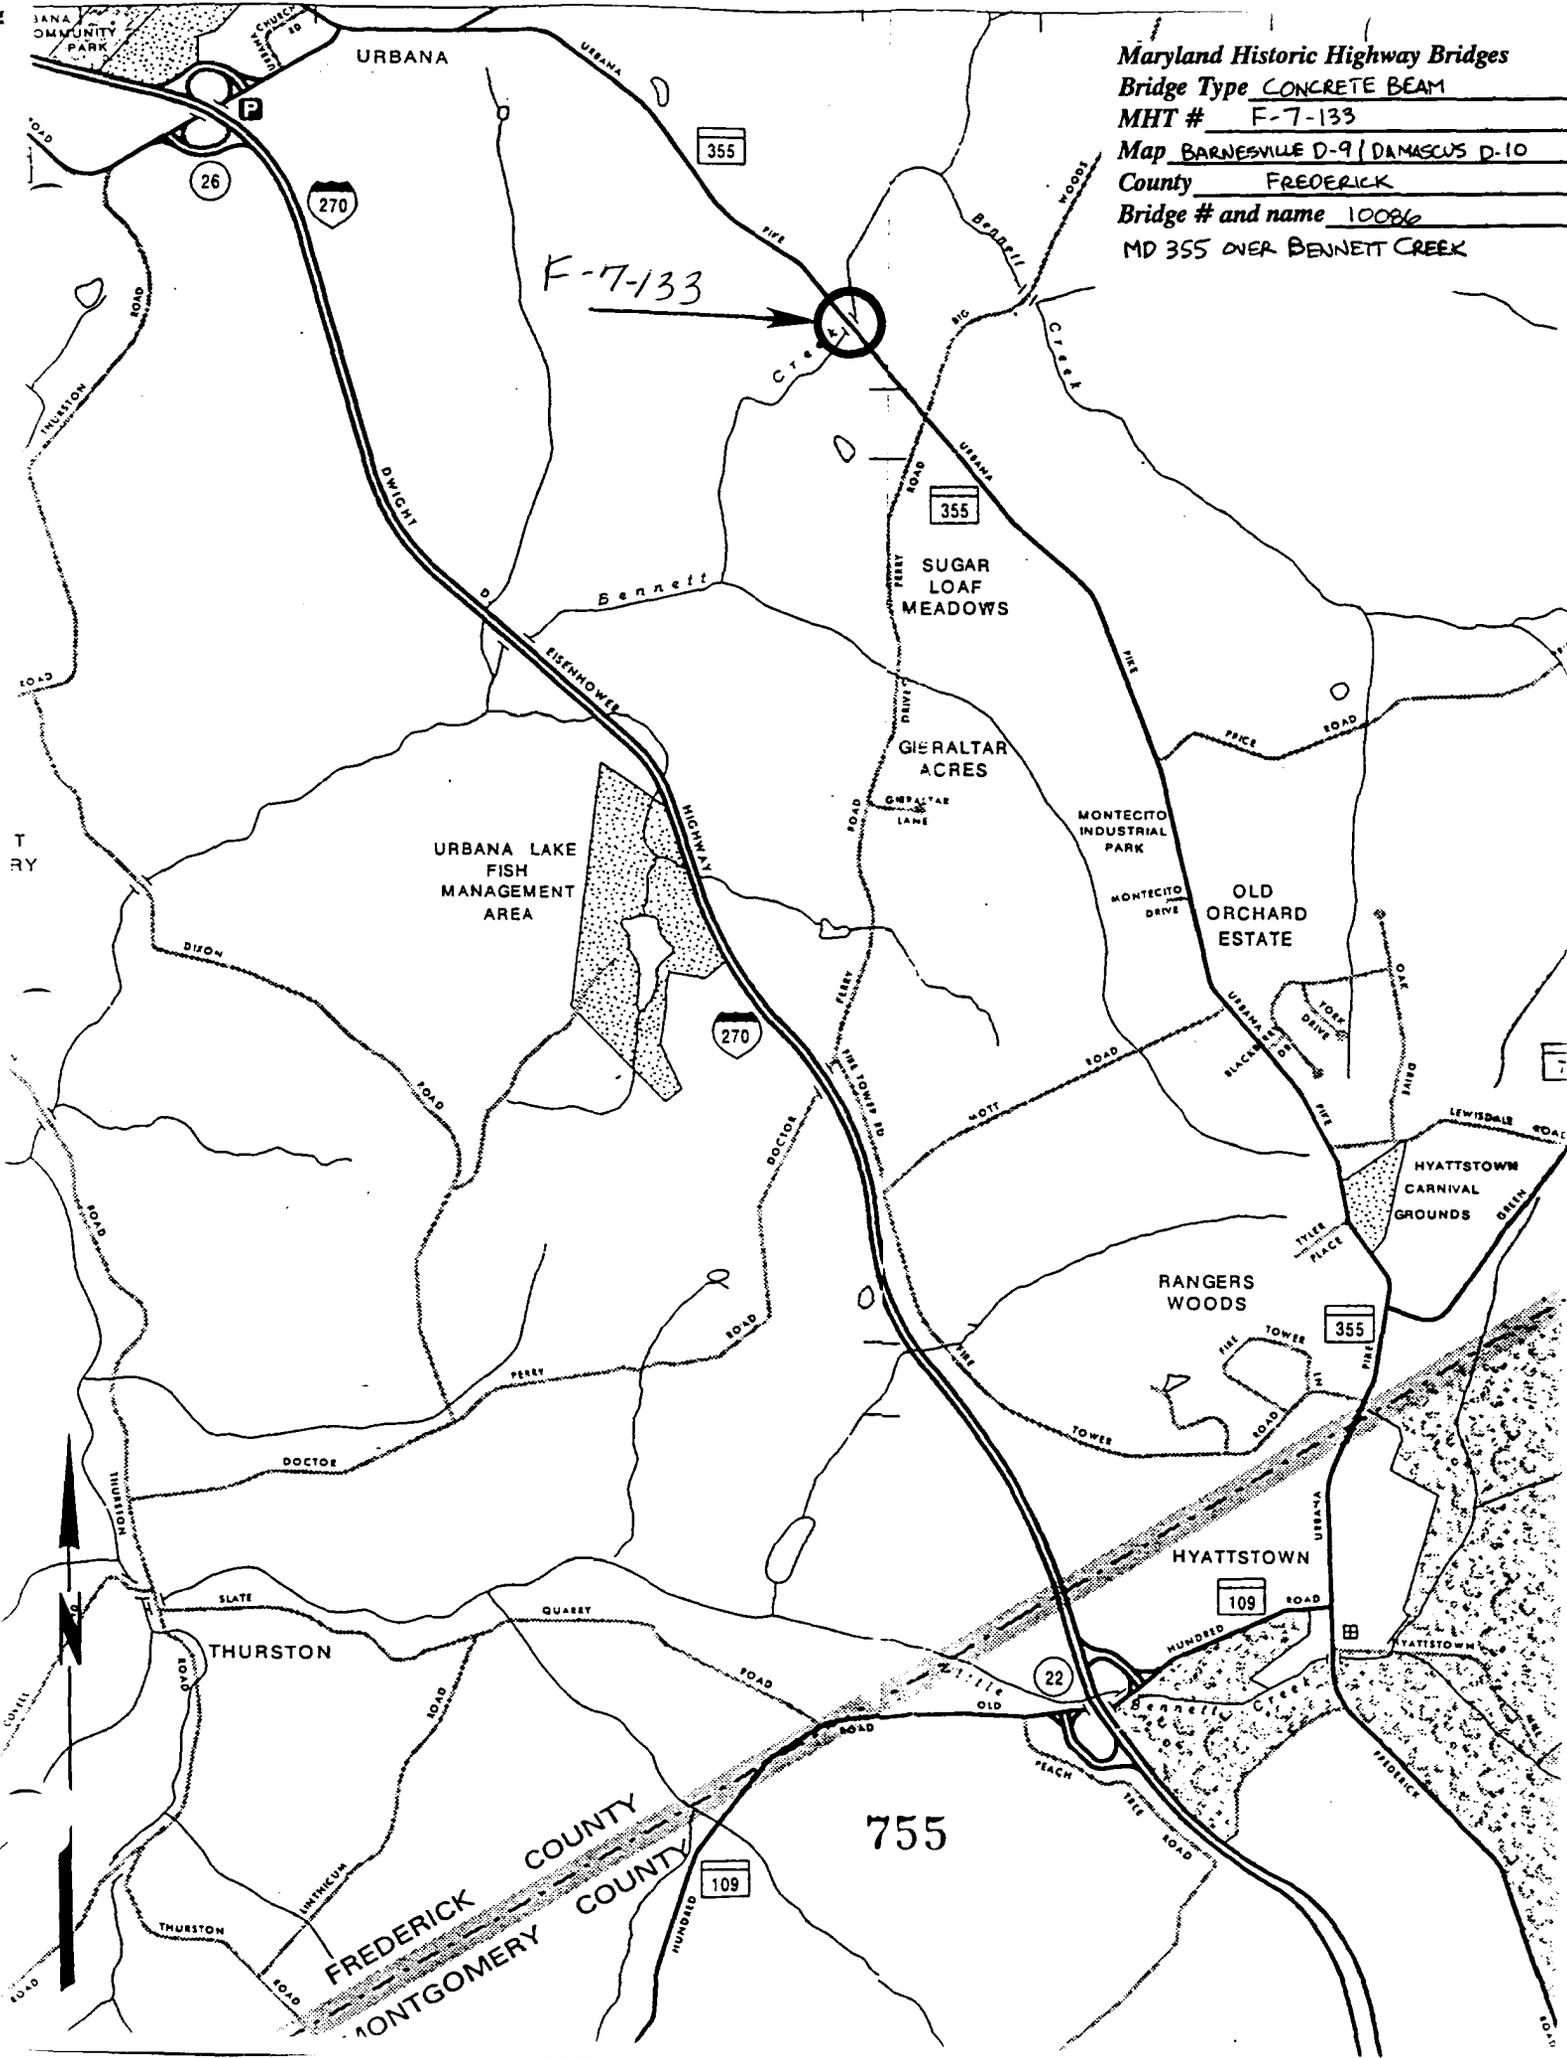



1. 1
2. MA 355 over Bonnet
3. Frederick County
4. Ryan McKay
5. 307
6. MA SHPD
7. Detail of Span at Joint
8. 1 of 6



1. 1 148

2. ML 355 over Bennett

3. Frederick County

4. Ryan McKay

5. 3-92

6. ML SH PD

7. Detail of Beans

8. 2 of 6



1. 133

2. MB 3-5 over Bonnet

3. Frederick County

4. Rafal McKay

5. 3-9

6. MB 3-9

7. Upstream Elevation

8. 304



1. F-7-133

2. MD 355 over Bennett

3. Frederick County

4. Ryan McKinney

5. 3-97

6. MD SHPO

7. Downstream Elevation

8. 4046



1. F 7 133
2. MD 355 over Bennett
3. Frederick County
4. Ryan McKay
5. 3-97
6. MD SHPO
7. Upstream Paraflex
8. 3 of 6



1. F 7-133

2. MD 355 over Bennett

3. Frederick County

4. Ryan McKay


5. 3-97

6. MD SHPO

7. North approach

8. 6 of 6

MARYLAND HISTORICAL

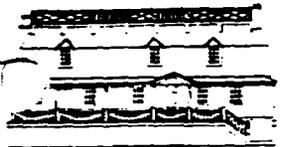

TRUST

57102290

William Donald Schaefer
Governor

Jacqueline H. Rogers
Secretary, DHCD

INDIVIDUAL PROPERTY/DISTRICT
MARYLAND HISTORICAL TRUST
INTERNAL NR-ELIGIBILITY REVIEW FORM

Property/District Name: Bridge # 10086, MD 355 over Survey Number: F-7-133
Bennett Creek, Frederick, MD

Project: MD 355 over Bennett Creek Agency: FSHA

Site visit by MHT Staff: no yes Name _____ Date _____

Eligibility recommended Eligibility not recommended

Criteria: A B C D Considerations: A B C D E F G None

Justification for decision: (Use continuation sheet if necessary and attach map)

Bridge #10086 does not meet any of the Criteria for listing in the National Register of Historic Places. Although more than 50 years old, it is not associated with significant events or lives of significant persons, nor does it embody the distinctive characteristics of a type, period, or method of construction, or represent the work of a master. Constructed in 1924 it is a standard slab and girder bridge. It has had a section replaced and lacks integrity.

Documentation on the property/district is presented in: Project File

Prepared by: Rita Supina
Elizabeth Hannold 11/19/91
Reviewer, Office of Preservation Services Date

program concurrence: yes no not applicable

R. Bradburn 20 Nov 91
Reviewer, NR program Date

DT

MARYLAND COMPREHENSIVE HISTORIC PRESERVATION PLAN DATA - HISTORIC CONTEXT

I. Geographic Region:

- Eastern Shore (all Eastern Shore counties, and Cecil)
- Western Shore (Anne Arundel, Calvert, Charles, Prince George's and St. Mary's)
- Piedmont (Baltimore City, Baltimore, Carroll, Frederick, Harford, Howard, Montgomery)
- Western Maryland (Allegany, Garrett and Washington)

II. Chronological/Developmental Periods:

- Paleo-Indian 10000-7500 B.C.
- Early Archaic 7500-6000 B.C.
- Middle Archaic 6000-4000 B.C.
- Late Archaic 4000-2000 B.C.
- Early Woodland 2000-500 B.C.
- Middle Woodland 500 B.C.- A.D. 900
- Late Woodland/Archaic A.D. 900-1600
- Contact and Settlement A.D. 1570-1750
- Rural Agrarian Intensification A.D. 1680-1815
- Agricultural-Industrial Transition A.D. 1815-1870
- Industrial/Urban Dominance A.D. 1870-1930
- Modern Period A.D. 1930-Present
- Unknown Period (prehistoric historic)

III. Prehistoric Period Themes:

- Subsistence
- Settlement
- Political
- Demographic
- Religion
- Technology
- Environmental Adaption

IV. Historic Period Themes:

- Agriculture
- Architecture, Landscape Architecture, and Community Planning
- Economic (Commercial and Industrial)
- Government/Law
- Military
- Religion
- Social/Educational/Cultural
- Transportation

V. Resource Type:

Category: Structure

Historic Environment: Rural

Historic Function(s) and Use(s): Bridge

Known Design Source: _____