

**MARYLAND HISTORICAL TRUST
DETERMINATION OF ELIGIBILITY FORM**

NR Eligible: yes
no

Property Name: Mount Pleasant Inventory Number: CE-24

Address: 235 Grove Neck Road City: Earleville Zip Code: 21919-2905

County: Cecil County USGS Topographic Map: Earleville

Owner: Charles Scott, Jr. Is the property being evaluated a district? yes

Tax Parcel Number: 28 Tax Map Number: 61 Tax Account ID Number: 057871

Project: Bracebridge Estates Agency: _____

Site visit by MHT Staff: no X yes Name: Paul Alan Brinkman Date: 12/15/67

Is the property located within a historic district? yes X no

<i>If the property is within a district</i>		District Inventory Number: _____
NR-listed district <input type="checkbox"/> yes	Eligible district <input type="checkbox"/> Yes	District Name: _____
Preparer's Recommendation: Contributing resource <input type="checkbox"/> yes <input type="checkbox"/> no Non-contributing but eligible in another context _____		

<i>If the property is not within a district (or the property is a district)</i>	
Preparer's Recommendation: Eligible <input checked="" type="checkbox"/> X Yes <input type="checkbox"/> no	

Criteria: A B X C D Considerations: A B C D E F G None

Documentation on the property/district is presented in: MIHP CE-24

Description of Property and Eligibility Determination: *(Use continuation sheet if necessary and attach map and photo)*

The property was surveyed in 1967, below is a description of the house at that time:

The house is constructed of common bond brick and is three bays wide and one room deep. The front of the house, unlike the side and rear walls, is of Flemish bond brick. There is an enclosed brick chimney on each side of the house. Along the front roof line is a cornice made of three rows of projecting bricks. All of the windows are six-over-six double-hung sash and they have shutters. The front door has a fanlight transom. There is an entrance porch on the front which has a flat roof supported by square posts. There are basement windows, segmentally arched and barred horizontally. The A-roof has a very gentle slope. On the right side there is a small, shed-roofed addition and on the rear there is a one-story addition.

In May 2007, the Ottery Group surveyed the property and while most of the dwelling remains the same as it did in 1967, there were some changes that were noted. The most noticeable difference is the alteration of the front porch. Today, the front porch has a hipped roof which is supported by tapered columns and directly below the porch roof line are decorative dentils. Another change that was noted was the removal of the enclosed addition on the right side and its replacement with a carport addition, which has a shed roof and is supported by wood posts. Additionally, the exterior brick of the house has been painted blue.

MARYLAND HISTORICAL TRUST REVIEW	
Eligibility recommended <input checked="" type="checkbox"/> X	Eligibility not recommended _____
Criteria: <input type="checkbox"/> A <input type="checkbox"/> B <input checked="" type="checkbox"/> X C <input type="checkbox"/> D	Considerations: <input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D <input type="checkbox"/> E <input type="checkbox"/> F <input type="checkbox"/> G <input type="checkbox"/> None
Comments: <u>This determination presumes that the interior (which was not examined by the preparer of the present DOE form) remains substantially in the condition shown in 1979 photos in MIHP file.</u>	
<u>Matthew Sage</u> Reviewer, Office of Preservation Services	<u>8/13/07</u> Date
<u>[Signature]</u> Reviewer, NR Program	<u>8/9/07</u> Date

200702312

MARYLAND HISTORICAL TRUST
NR-ELIBILITY REVIEW FORM


Continuation Sheet No. 1

CE-24

Mount Pleasant is eligible for listing in the National Register of Historic Places because it meets Criteria C; it embodies the distinctive characteristics of a type, period, or method of construction. This Federal style dwelling has several distinctive characteristics of the time period 1780-1820 such as, a side-gabled roof, a semi-circular fanlight centrally located above the front door, tooth like dentils, and symmetrically aligned windows which are six-over-six, double-hung sash. The new hipped roof front porch is not commonly found on Federal style houses. Instead they generally have a gabled pediments or a flat roof supported by columns. However, this alteration does not detract from the integrity or feeling of the house and the associated property. Aside from the minor alterations to the dwelling, Mount Pleasant is similar in design as the other dwellings located in and around Earleville.

Prepared by: Erin Moyer, The Ottery Group, Inc.

Date Prepared: 7/6/07

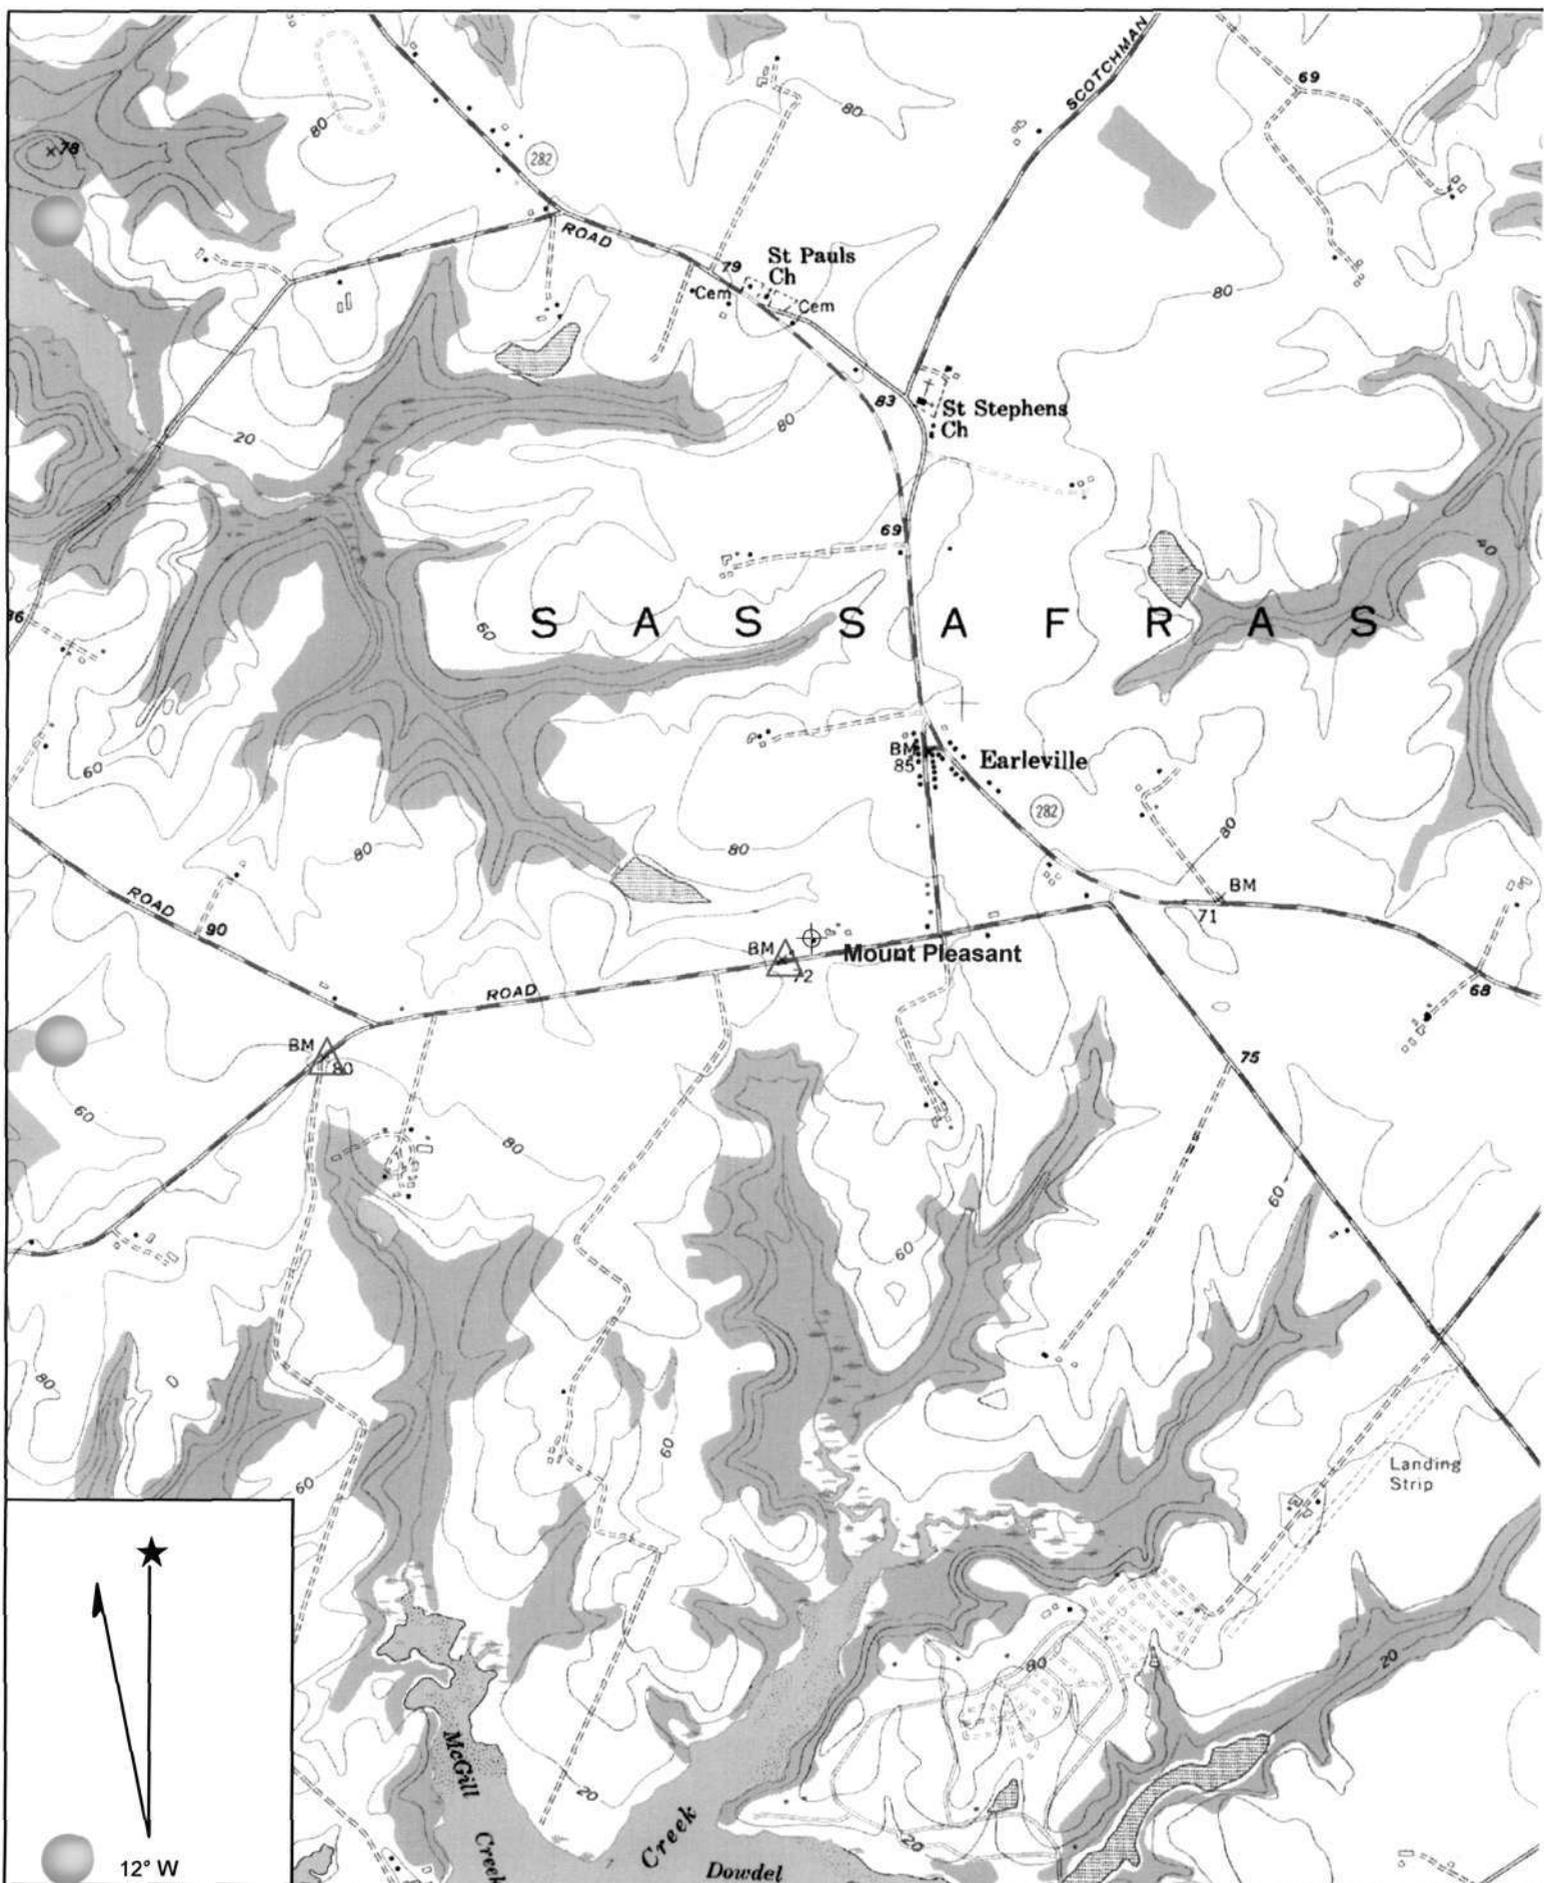

Name: EARLEVILLE
 Date: 7/9/2007
 Scale: 1 inch equals 2000 feet

Location: 039.4097500° N 075.9229402° W
 Caption: CE-24
 Mount Pleasant
 Cecil County, MD



CE-24

Mount Pleasant

Cecil County, MD

Tom Bodor

7/2/07

MD SHPO

Mount Pleasant, South facade

1 of 1

1. STATE Maryland COUNTY Cecil TOWN VICINITY STREET NO. Earleville ORIGINAL OWNER Dr. John Veasey ORIGINAL USE Dwelling PRESENT OWNER Mr. Robert Pearce PRESENT USE Dwelling WALL CONSTRUCTION Brick NO. OF STORIES 2- 1	HISTORIC AMERICAN BUILDINGS SURVEY INVENTORY CE - 24
2. NAME MOUNT PLEASANT DATE OR PERIOD C. 1810 STYLE Federal ARCHITECT BUILDER	3. FOR LIBRARY OF CONGRESS USE

4. NOTABLE FEATURES, HISTORICAL SIGNIFICANCE AND DESCRIPTION OPEN TO PUBLIC NO

This is a simple brick house of the Federal period, of a type which is commonly found in this county. The house is of common bond brick and is three bays wide and one room deep. The front of the house, unlike the side and rear walls, is of Flemish bond brick. There is an enclosed brick chimney at each end of the house. Along the front roof line is a cornice made of three rows of projecting bricks. All the windows are 6/6 sashes and the central door has a rounded brick arch. There are basement windows, segmentally arched and barred horizontally. The A-roof has a very gentle slope. This is a simple but attractive house, noteworthy as a good example of the type of small brick Federal house found in this county.

R.N. Pearce Sr.
for map - mms 4/70

5. PHYSICAL CONDITION OF STRUCTURE Endangered No Interior Exterior good



6. LOCATION MAP (Plan Optional)

2095 7. PHOTOGRAPH 1 B&W 3-1/4"
x 4-1/2"

8. PUBLISHED SOURCES (Author, Title, Pages)
INTERVIEWS, RECORDS, PHOTOS, ETC.
Forman, Early Manor + Plantation Houses, 1939,
p 235

9. NAME, ADDRESS AND TITLE OF RECORDER

Paul Alan Brinkman
15 December 1967

DATE OF RECORD

SUPPLEMENTAL INFORMATION AND PHOTOGRAPHS MAY BE ADDED ON SHEET OF SAME SIZE



~~Stover~~

CE-EB 24

MI. PLEASANT

SOUTH ELEVATION

FAKLEVILLE, MD.

6/79

PBT




Mt. PLEASANT
WEST ELEVATION
EARLEVILLE, MD.

CE-24

6/79

PBT

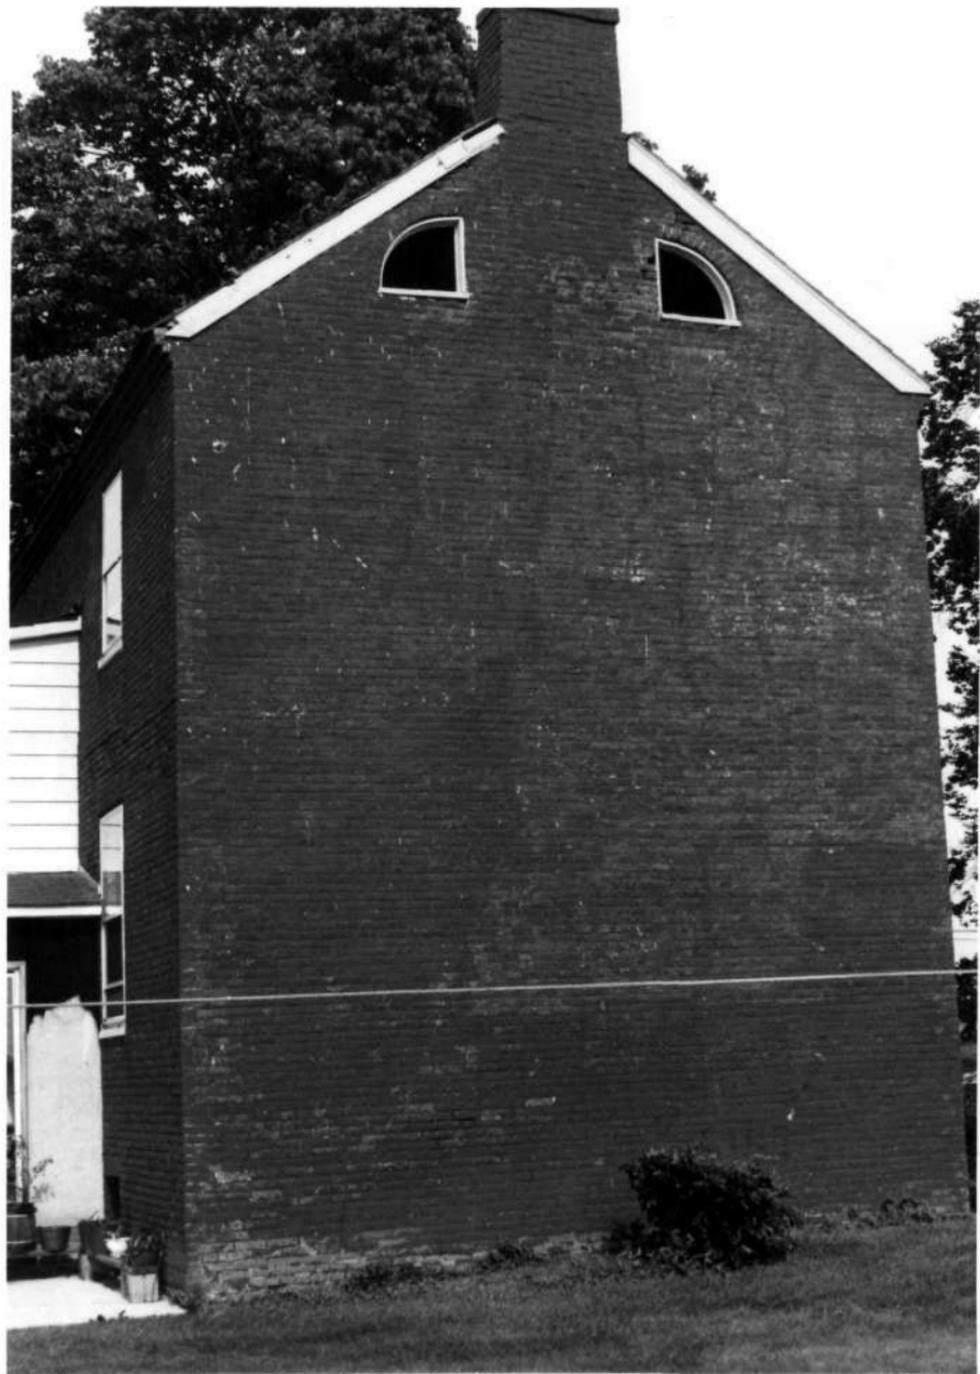

MT. PLEASANT
WEST ELEVATION

EARNEVILLE, MD.

6/79 PBT

CE-24



Mt. Pleasant

CC-29

SOUTH ENTRANCE

EARLEVILLE, MD.

6/75

PBT



Mt. Pleasant

CE-24

STAIR RAILING ON 2ND FLOOR

EARLEVILLE, MD.

6/79

PBT



Mt. PLEASANT
MAIN HALL
EARLEVILLE, MO.

6/79

P13T

CE-24



MT. PLEASANT

CE-24

WEST BEDROOM WARDEN

EARLEVILLE, MD.

6/79

P13T



Mt. Pleasant
& MAIN HALL
EARLEVILLE,

FROM WEST PARLOR
MD.

6/79

FBI



Mt. Pleasant

CE-24

EAST PARLOR DETAIL

EARLEVILLE, MD.

6/79

PBT



Mt. Pleasant


CE-24

WEST PARLOR MANTEL

EARCEVILLE, MD.

6/79

PBT

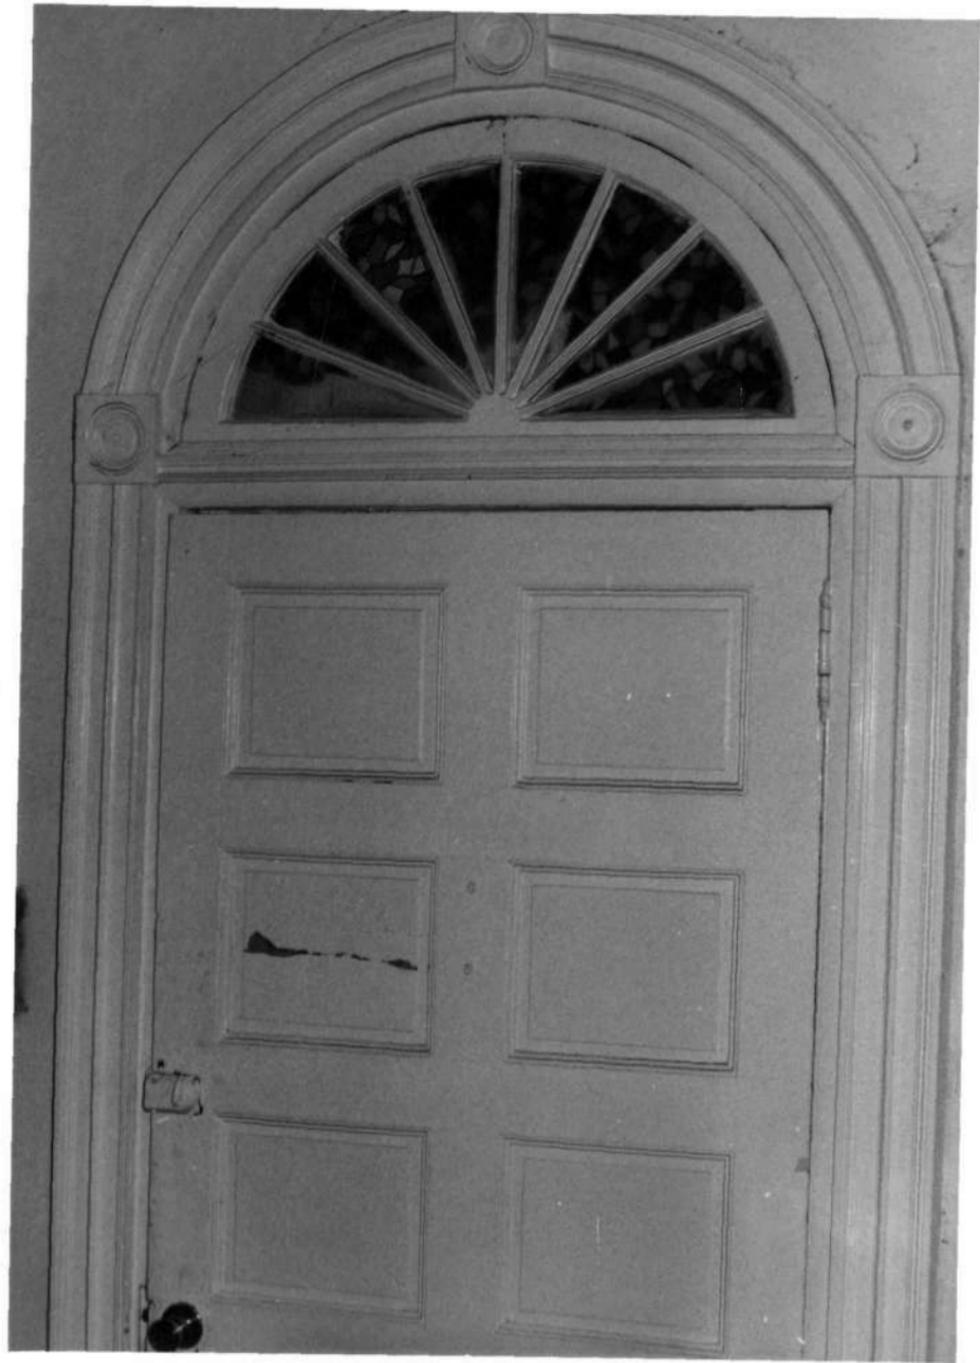

Mt. Pleasant

CE. 24

ENTRANCE TRANSOM - INTERIOR

EARLEVILLE, MD.

4/79

P13T



CE-24

Mt. Pleasant

DAG 1/68

PAPER
TURED

PAPER
TURED

PAPER
TURED



"Mount Pleasant"

CE-24

1980 photo by Elizabeth Booth

Charlie Scott

(No. 3 2 03 836m15)

N N N 162