

WA-HAG-140  
HAGERSTOWN ARMORY  
Hagerstown  
Public (Restricted)

1926

The Hagerstown Armory is a two-story brick structure with full basement, the facade of which is executed in Flemish bond. The building, emulating a medieval fortification, is located near the center of the town of Hagerstown.

The Armory was built for Company D, 58th Support Battalion. The building was the scene of dance marathons in the 1930's and more recently served as a training facility for the town police department.

United States Department of the Interior  
National Park Service

For NPS use only

received

date entered

# National Register of Historic Places Inventory—Nomination Form

See instructions in *How to Complete National Register Forms*  
Type all entries—complete applicable sections

## 1. Name

historic Hagerstown Armory

and/or common

## 2. Location

street & number 328 North Potomac Street N/A not for publication

city, town Hagerstown N/A vicinity of Sixth Congressional District

state Maryland code 24 county Washington code 043

## 3. Classification

<b>Category</b>	<b>Ownership</b>	<b>Status</b>	<b>Present Use</b>
<input type="checkbox"/> district	<input checked="" type="checkbox"/> public	<input checked="" type="checkbox"/> occupied	<input type="checkbox"/> agriculture
<input checked="" type="checkbox"/> building(s)	<input type="checkbox"/> private	<input type="checkbox"/> unoccupied	<input type="checkbox"/> commercial
<input type="checkbox"/> structure	<input type="checkbox"/> both	<input type="checkbox"/> work in progress	<input type="checkbox"/> educational
<input type="checkbox"/> site	<b>Public Acquisition</b>	<b>Accessible</b>	<input checked="" type="checkbox"/> entertainment
<input type="checkbox"/> object	<input type="checkbox"/> in process	<input checked="" type="checkbox"/> yes: restricted	<input checked="" type="checkbox"/> government
	<input type="checkbox"/> being considered	<input type="checkbox"/> yes: unrestricted	<input type="checkbox"/> industrial
	<input checked="" type="checkbox"/> not applicable	<input type="checkbox"/> no	<input type="checkbox"/> military
			<input type="checkbox"/> museum
			<input type="checkbox"/> park
			<input type="checkbox"/> private residence
			<input type="checkbox"/> religious
			<input type="checkbox"/> scientific
			<input type="checkbox"/> transportation
			<input type="checkbox"/> other:

## 4. Owner of Property

name State of Maryland, Military Department Contact: Col. Raymond Clift  
728-3388 X244

street & number 231 West Hoffman Street

city, town Baltimore N/A vicinity of state Maryland 21201

## 5. Location of Legal Description

courthouse, registry of deeds, etc. Washington County Courthouse

street & number

city, town Hagerstown state Maryland 21740

## 6. Representation in Existing Surveys

title Maryland Historical Trust  
Historic Sites Inventory has this property been determined eligible?  yes  no

date 1980  federal  state  county  local

depository for survey records Maryland Historical Trust, 21 State Circle

city, town Annapolis state Maryland 21401

## 7. Description

MARYLAND NATIONAL GUARD ARMORIES THEMATIC GROUP

WA-HAG-140

<b>Condition</b>		<b>Check one</b>	<b>Check one</b>
<input type="checkbox"/> excellent	<input type="checkbox"/> deteriorated	<input type="checkbox"/> unaltered	<input checked="" type="checkbox"/> original site
<input checked="" type="checkbox"/> good	<input type="checkbox"/> ruins	<input checked="" type="checkbox"/> altered	<input type="checkbox"/> moved date <u>    N/A    </u>
<input type="checkbox"/> fair	<input type="checkbox"/> unexposed		

### Describe the present and original (if known) physical appearance

The Hagerstown Armory, erected in 1926, is a two story structure with full basement emulating a Medieval fortification. The structure is brick, with the front block executed in Flemish bond. Attached to the rear of this 2-story main block is a narrower one-story drill hall. A modern one-story brick garage has been added to the rear of the drill hall.

The front (Potomac Street) facade is oriented to the west and consists of two, two-bay wide sections which flank a central block offset by two, three-story towers. In the side sections, windows at first floor level are 4/5 casement with bases set into the stone water table. At second floor level are 4/4 casement windows. All windows have stone sills and flat brick lintels. A line of scalloped stone molding crosses the side sections above the second floor windows. At the roofline six crenelles with stone caps crown each section.

The towers which mark the front entrance to the building are octagonal, with one window in each of their three full sides, 2/5 casement at first and 2/4 casement at second floor levels. Window arches and sills correspond to those of the side sections with the addition of triangular white end stones in the arches. Centered above the second floor windows, in a line corresponding to the scalloped stone molding of the side sections, three square stone panels are set into the tower walls. At the third floor level single 1/1 sash windows are centered in the tower walls with bases set into a stone molding running around the towers. Tower tops are characterized by a ring of scalloped stone molding, surmounted by a ring of brick dentils (r dentils per side of the towers), and topped by two crenelles per side with stone caps.

At center front, three cement steps lead to a segmentally arched entry under which painted metal double doors are recessed 2-3 feet. A stone panel over the arch is inscribed "Maryland National Guard." At second floor level is a 6/4 casement window with stone sill and flat brick arch bracketed with white stones at its corners. A band of scalloped stone trim corresponding to that of the side sections crosses above the window. At the roofline, the stone molding corresponding to the third floor of the towers crosses the center section. The center is topped by two crenelles with stone caps with stone tablet bearing the seal of the State of Maryland centered between them.

The front lawn is bordered by a low hedge.

The north side of the center block contains 3 bays with three 2/3 casement windows at first floor level and three 2/4 casement windows at first floor level and three 2/4 casement windows at second floor level. The scalloped stone molding of the front facade continues around the sides and is surmounted by 8 crenelles with stone caps.

The gable-roofed one story drill hall over full basement is seven bays long, with bays separated by strip buttresses with stone capped set-backs corresponding to the bases and tops of the first floor windows. The basement is faced with stone and contains two 3/2, 6-pane strip windows per bay, except at the second bay to the end where 10 cement stairs with iron pipe railing lead to a double door entry at first floor level. The first floor windows are tall 3/6 sash, one per bay except over the stairs, where there are two smaller windows centered over the doorway. The two sides of the building are identical except that the basement windows have been blocked up on the south side. At the rear of the building is a one story brick garage and fenced motor compound.

# 8. Significance

Period	Areas of Significance—Check and justify below			
<input type="checkbox"/> prehistoric	<input type="checkbox"/> archeology-prehistoric	<input type="checkbox"/> community planning	<input type="checkbox"/> landscape architecture	<input type="checkbox"/> religion
<input type="checkbox"/> 1400-1499	<input type="checkbox"/> archeology-historic	<input type="checkbox"/> conservation	<input type="checkbox"/> law	<input type="checkbox"/> science
<input type="checkbox"/> 1500-1599	<input type="checkbox"/> agriculture	<input type="checkbox"/> economics	<input type="checkbox"/> literature	<input type="checkbox"/> sculpture
<input type="checkbox"/> 1600-1699	<input checked="" type="checkbox"/> architecture	<input type="checkbox"/> education	<input checked="" type="checkbox"/> military	<input checked="" type="checkbox"/> social/
<input type="checkbox"/> 1700-1799	<input type="checkbox"/> art	<input type="checkbox"/> engineering	<input type="checkbox"/> music	<input type="checkbox"/> humanitarian
<input type="checkbox"/> 1800-1899	<input type="checkbox"/> commerce	<input type="checkbox"/> exploration/settlement	<input type="checkbox"/> philosophy	<input type="checkbox"/> theater
<input checked="" type="checkbox"/> 1900-1946	<input type="checkbox"/> communications	<input type="checkbox"/> industry	<input type="checkbox"/> politics/government	<input type="checkbox"/> transportation
		<input type="checkbox"/> invention		<input type="checkbox"/> other (specify)

Specific dates 1926 Builder/Architect unknown

Statement of Significance (in one paragraph)      Applicable Criteria: A, C  
 Applicable Exceptions: none  
 Significance Evaluated: state

The Hagerstown, Maryland Armory is primarily significant for its association with the reorganization and expansion of the National Guard system in the twentieth century. It derives additional significance from its role as a social center for its community, a function it has served continuously since its construction date. Architecturally, the building embodies the distinctive characteristics of its type, including a T shaped plan with a two-story front "head house" section and a one-story perpendicular "drill hall" extending to the rear; its facade is detailed to recall Medieval fortifications, with towers flanking the central entrance, crenellated parapets, and strip buttresses.

The Hagerstown Armory was the home of Company D, 58th Support Battalion, from its construction in 1926 to January 1, 1978 when the Company moved to a new armory building outside of Hagerstown on Route I-70 near Breathedsville. The main reason cited for the relocation was lack of space for vehicle storage and parking at the Potomac Street site.

As part of the 29th Division of Infantry, Hagerstown and Washington County men share in the history of outstanding service by the Division, which was awarded distinguished unit citations and the French Croix de Guerre with Palm for its activities in World War II.

After being vacated by the Guard in 1978, the Armory stood vacant until it was taken over by the U.S. Bureau of the Census for use as a field office through 1980.

A 1977 article in Hagerstown's Maryland Herald describes the use made of the facility's basement firing range as a training center for new police officers. In addition to long-time use by local police, the Armory was the scene of dance marathons in the 1930s and more recently has housed wrestling matches, local school basketball games and annual home builders' show.

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

WA-HAG-140

For NPS use only

received

date entered

Hagerstown Armory  
Continuation sheet Washington County, Maryland Item number 10 Page 1

**GEOGRAPHICAL DATA:**

Verbal Boundary Description:

In Hagerstown, Washington County, Maryland:

Being the southernmost one hundred (100) feet, of all of that lot or parcel of ground situate and lying on the east side of North Potomac Street, Hagerstown, Washington County, Maryland, and having a frontage of one hundred (100) feet, on said street, and extending back there from with that uniform width a distance of two hundred forty (240) feet more or less, to a public alley, and being all of lot No. 287 and the southern eighteen (18) feet, of lot No. 288 on the General Plan of Hagerstown, Maryland...

Boundary Justification:

The nominated property comprises the total parcel historically associated with the resource.

# 9. Major Bibliographical References

WA-HAG-140

Vertical files, Maryland Room, Enoch Pratt Free Library, Baltimore.  
 Land Records, Baltimore County, Liber EO 170/339.  
 Vertical Files, Western Maryland Room, Washington County Library.  
 Ewing, Joseph H. 29 Let's Go! A History of the 29th Infantry Division in World War II.  
 Washington Infantry Journal Press, 1979.  
 Clipping files of the Herald, Hagerstown.

# 10. Geographical Data

Acreeage of nominated property 0.50 acres

Quadrangle name Hagerstown, MD

Quadrangle scale 1:24000

UTM References

A 

1	8
---	---

2	6	6	8	8	0
---	---	---	---	---	---

4	3	9	1	8	2	0
---	---	---	---	---	---	---

  
 Zone Easting Northing

B 

--	--

--	--	--	--

--	--	--	--	--	--

  
 Zone Easting Northing

C 

--	--

--	--	--	--

--	--	--	--	--	--

D 

--	--

--	--	--	--

--	--	--	--	--	--

E 

--	--

--	--	--	--

--	--	--	--	--	--

F 

--	--

--	--	--	--

--	--	--	--	--	--

G 

--	--

--	--	--	--

--	--	--	--	--	--

H 

--	--

--	--	--	--

--	--	--	--	--	--

Verbal boundary description and justification

See Continuation Sheet No. 1.

List all states and counties for properties overlapping state or county boundaries

state	N/A	code	county	code

state	code	county	code

# 11. Form Prepared By

name/title Susanne Moore, Historic Sites Surveyor

organization Maryland Historical Trust date July 1980; revised 7/1985

street & number 21 State Circle telephone (301) 269-2438

city or town Annapolis state Maryland 21401

# 12. State Historic Preservation Officer Certification

The evaluated significance of this property within the state is:

national  state  local

As the designated State Historic Preservation Officer for the National Historic Preservation Act of 1966 (Public Law 89-665), I hereby nominate this property for inclusion in the National Register and certify that it has been evaluated according to the criteria and procedures set forth by the National Park Service.

State Historic Preservation Officer signature *[Signature]* 8-14-85

title STATE HISTORIC PRESERVATION OFFICER date

For NPS use only

I hereby certify that this property is included in the National Register

date

Keeper of the National Register

Attest:


date

Chief of Registration

WA-HAG-140  
 HAGERSTOWN  
 ARMORY  
 WASHINGTON  
 COUNTY,  
 MARYLAND

18-266880-4391820

MARYLAND NATIONAL  
 GUARD ARMORIES  
 THEMATIC GROUP

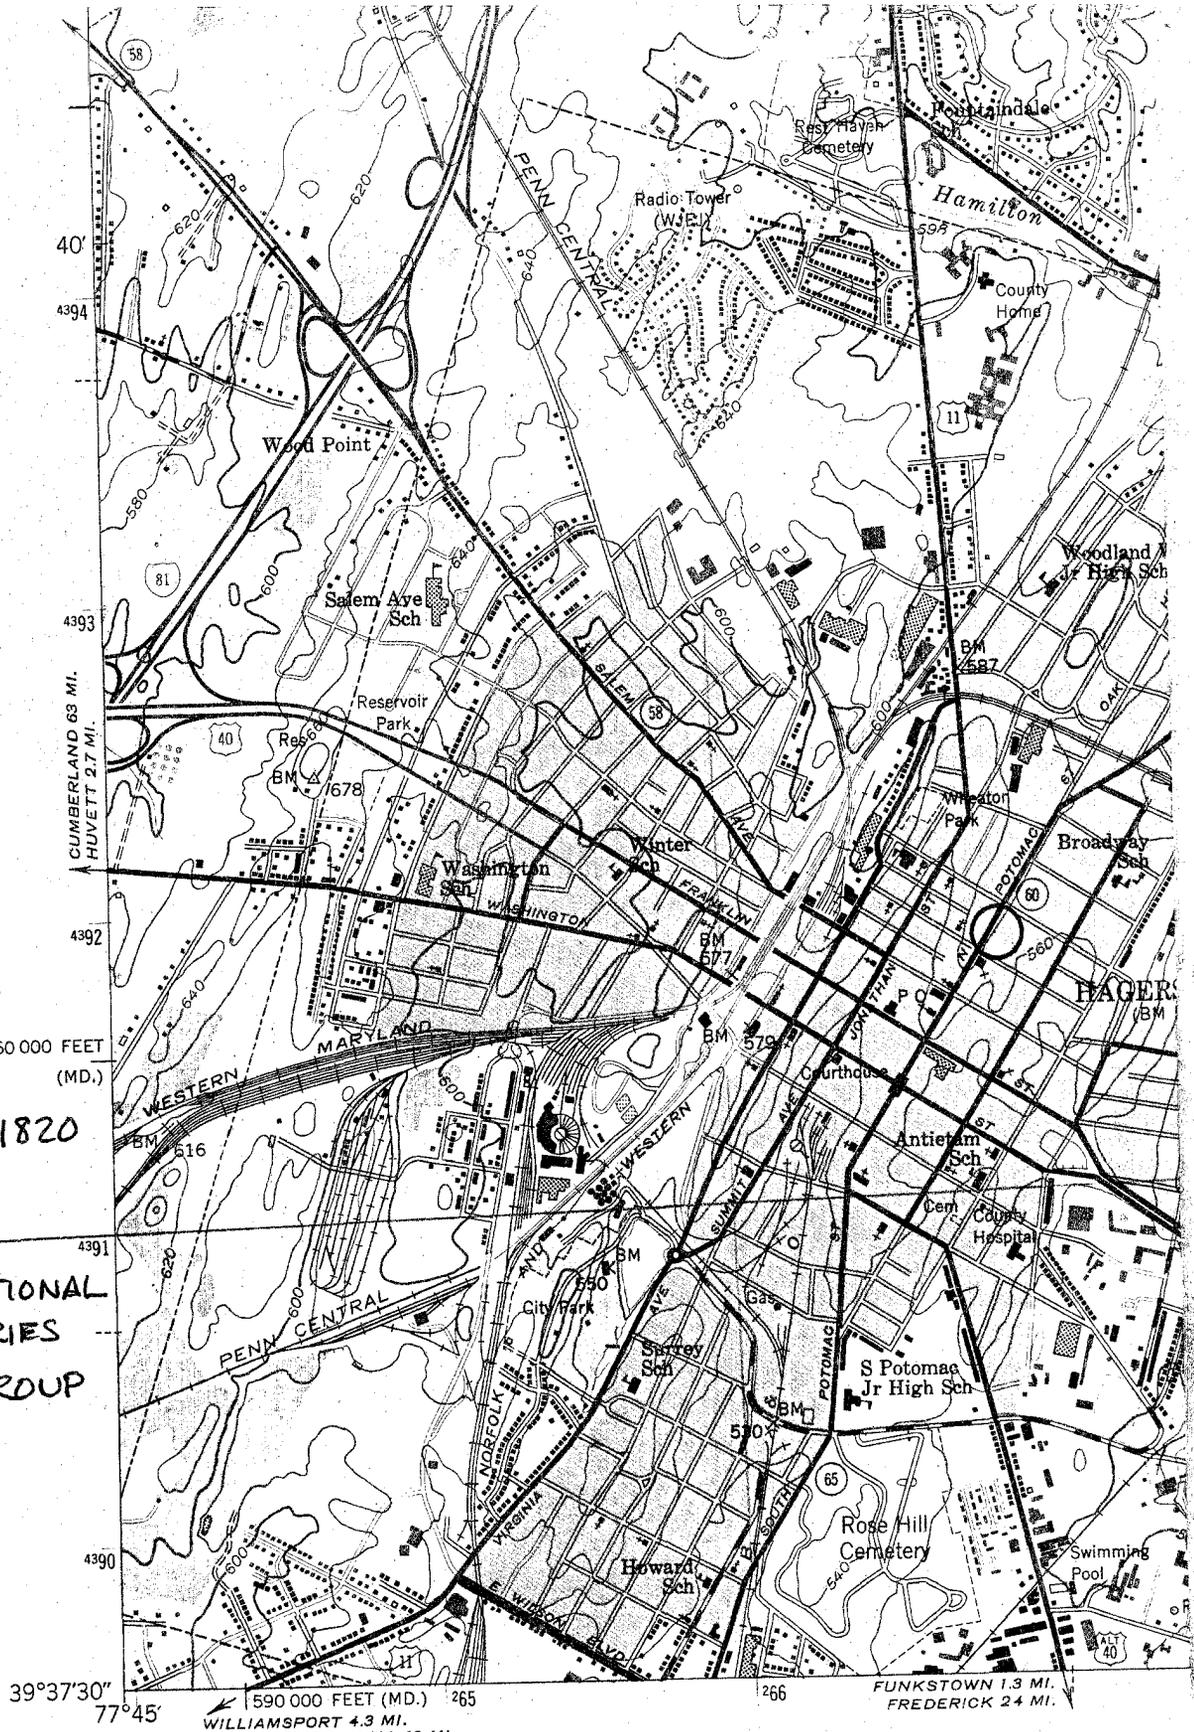

(WILLIAMSPORT)  
 5463 III SE


Mapped by Corps of Engineers, U. S. Army  
 Edited and published by the Geological Survey

Control by USGS, USC&GS, and USCE

Topography from aerial photographs by stereophotogrammetric methods. Aerial photographs taken 1943  
 Culture revised by the Geological Survey 1953

Polyconic projection. 1927 North American datum  
 10,000-foot grids based on Maryland coordinate system  
 and Pennsylvania coordinate system, south zone

Red tint indicates area in which only



UTM GRID AND 1971 MAGNETIC NORTH  
 DECLINATION AT CENTER OF SHEET

INVENTORY FORM FOR STATE HISTORIC SITES SURVEY

**1 NAME**

HISTORIC Hagerstown Armory

AND/OR COMMON

**2 LOCATION**

STREET & NUMBER 328 N. Potomac Street

CITY, TOWN Hagerstown VICINITY OF \_\_\_\_\_ CONGRESSIONAL DISTRICT Sixth

STATE Maryland COUNTY Washington

**3 CLASSIFICATION**

CATEGORY	OWNERSHIP	STATUS	PRESENT USE
<input type="checkbox"/> DISTRICT	<input checked="" type="checkbox"/> PUBLIC	<input checked="" type="checkbox"/> OCCUPIED	<input type="checkbox"/> AGRICULTURE <input type="checkbox"/> MUSEUM
<input checked="" type="checkbox"/> BUILDING(S)	<input type="checkbox"/> PRIVATE	<input type="checkbox"/> UNOCCUPIED	<input type="checkbox"/> COMMERCIAL <input type="checkbox"/> PARK
<input type="checkbox"/> STRUCTURE	<input type="checkbox"/> BOTH	<input type="checkbox"/> WORK IN PROGRESS	<input type="checkbox"/> EDUCATIONAL <input type="checkbox"/> PRIVATE RESIDENCE
<input type="checkbox"/> SITE	<b>PUBLIC ACQUISITION</b>	<b>ACCESSIBLE</b>	<input type="checkbox"/> ENTERTAINMENT <input type="checkbox"/> RELIGIOUS
<input type="checkbox"/> OBJECT	<input type="checkbox"/> IN PROCESS	<input checked="" type="checkbox"/> YES: RESTRICTED	<input checked="" type="checkbox"/> GOVERNMENT <input type="checkbox"/> SCIENTIFIC
	<input type="checkbox"/> BEING CONSIDERED	<input type="checkbox"/> YES: UNRESTRICTED	<input type="checkbox"/> INDUSTRIAL <input type="checkbox"/> TRANSPORTATION
		<input type="checkbox"/> NO	<input type="checkbox"/> MILITARY <input type="checkbox"/> OTHER:

**4 OWNER OF PROPERTY**

NAME State of Maryland, Military Department  
Contact: Col. Raymond Clift Telephone #: 728-3388 x 244

STREET & NUMBER 231 W. Hoffman Street

CITY, TOWN Baltimore VICINITY OF \_\_\_\_\_ STATE, zip code Maryland 21204

**5 LOCATION OF LEGAL DESCRIPTION**

COURTHOUSE, REGISTRY OF DEEDS, ETC. Washington County Courthouse Liber #: E0170  
Folio #: 339

STREET & NUMBER

CITY, TOWN Hagerstown STATE Maryland

**6 REPRESENTATION IN EXISTING SURVEYS**

TITLE

DATE \_\_\_\_\_

\_\_\_\_\_ FEDERAL \_\_\_\_\_ STATE \_\_\_\_\_ COUNTY \_\_\_\_\_ LOCAL

DEPOSITORY FOR SURVEY RECORDS

CITY, TOWN \_\_\_\_\_ STATE \_\_\_\_\_

# 7 DESCRIPTION

WA-NAG-140

CONDITION		CHECK ONE	CHECK ONE
<input type="checkbox"/> EXCELLENT	<input type="checkbox"/> DETERIORATED	<input type="checkbox"/> UNALTERED	<input checked="" type="checkbox"/> ORIGINAL SITE
<input checked="" type="checkbox"/> GOOD	<input type="checkbox"/> RUINS	<input checked="" type="checkbox"/> ALTERED	<input type="checkbox"/> MOVED      DATE _____
<input type="checkbox"/> FAIR	<input type="checkbox"/> UNEXPOSED		

## DESCRIBE THE PRESENT AND ORIGINAL (IF KNOWN) PHYSICAL APPEARANCE

The Hagerstown Armory, erected in 1926, is a two story structure with full basement emulating a medieval fortification. The structure is brick, with the front block executed in Flemish bond. Attached to the rear of this 2-story main block is a narrower one-story drill hall. A modern one-story brick garage has been added to the rear of the drill hall.

The front (Potomac Street) facade is oriented to the west and consists of two, two-bay wide sections which flank a central block offset by two, three-story towers. In the side sections, windows at first floor level are 4/5 casement at the first floor, with bases set into the stone water table. At second floor level are 4/4 casement windows. All windows have stone sills and flat brick lintels. A line of scalloped stone molding crosses the side sections above the second floor windows. At the roofline six crenelles with stone caps crown each section.

The towers which mark the front entrance to the building are octagonal, with one window in each of their three full sides, 2/5 casement at first and 2/4 casement at second floor levels. Window arches and sills correspond to those of the side sections with the addition of triangular white end stones in the arches. Centered above the second floor windows, in a line corresponding to the scalloped stone molding of the side sections, three square stone panels are set into the tower walls. At the third floor level single 1/1 sash windows are centered in the tower walls with bases set into a stone molding running around the towers. Tower tops are characterized by a ring of scalloped stone molding, surmounted by a ring of brick dentils (4 dentils per side of the towers), and topped by two crenelles per side with stone caps.

At center front, three cement steps lead to a segmentally arched entry under which painted metal double doors are recessed 2-3 feet. A stone panel over the arch is inscribed "Maryland National Guard." At second floor level is a 6/4 casement window with stone sill and flat brick arch bracketed with white stones at its corners. A band of scalloped stone trim corresponding to that of the side sections crosses above the window. At the roofline, the stone molding corresponding to the third floor of the towers crosses the center section. The center is topped by two crenelles with stone caps with stone tablet bearing the seal of the State of Maryland centered between them.

The front lawn is bordered by a low hedge.

The north side of the center block contains 3 bays with three 2/3 casement windows at first floor level and three 2/4 casement windows at first floor level and three 2/4 casement windows at second floor level. The scalloped stone molding of the front facade continues around the sides and is surmounted by 8 crenelles with stone caps.

The gable-roofed one story drill hall over full basement is seven bays long, with bays separated by strip buttresses with stone capped set-backs corresponding to the bases and tops of the first floor windows. The basement is faced with stone

CONTINUE ON SEPARATE SHEET IF NECESSARY

SEE CONTINUATION SHEET #1.

WA-HAG-140

Hagerstown Armory  
Washington County  
Description

Continuation Sheet #1.

and contains two 3/2, 6-pane strip windows per bay, except at the second bay to the end where 10 cement stairs with iron pipe railing lead to a double door entry at first floor level. The first floor windows are tall 3/6 sash, one per bay except over the stairs, where there are two smaller windows centered over the doorway. The two sides of the building are identical except that the basement windows have been blocked up on the south side. At the rear of the building is a one story brick garage and fenced motor compound.



**9 MAJOR BIBLIOGRAPHICAL REFERENCES**

Vertical files, Maryland Room, Enoch Pratt Free Library, Baltimore.  
Land Records, Baltimore County, Liber EO 170/339.  
Vertical Files, Western Maryland Room, Washington County Library.  
Ewing, Joseph H. 29 Let's Go! A History of the 29th Infantry Division in World War II.  
Washington Infantry Journal Press, 1979.  
Clipping files of the Herald, Hagerstown.  
**CONTINUE ON SEPARATE SHEET IF NECESSARY**

**10 GEOGRAPHICAL DATA**

ACREAGE OF NOMINATED PROPERTY 0.500 acres

Quadrangle name: Hagerstown

Quadrangle scale: 1:24000

**VERBAL BOUNDARY DESCRIPTION**

SEE CONTINUATION SHEET #2.

**LIST ALL STATES AND COUNTIES FOR PROPERTIES OVERLAPPING STATE OR COUNTY BOUNDARIES**

STATE	COUNTY
STATE	COUNTY

**FORM PREPARED BY**

NAME / TITLE	
Susanne Moore, Historic Sites Surveyor	
ORGANIZATION	DATE
Maryland Historical Trust	July, 1980
STREET & NUMBER	TELEPHONE
21 State Circle	(301) 269-2438
CITY OR TOWN	STATE
Annapolis	Maryland 21401

The Maryland Historic Sites Inventory was officially created by an Act of the Maryland Legislature, to be found in the Annotated Code of Maryland, Article 41, Section 181 KA, 1974 Supplement.

The Survey and Inventory are being prepared for information and record purposes only and do not constitute any infringement of individual property rights.

RETURN TO: Maryland Historical Trust  
The Shaw House, 21 State Circle  
Annapolis, Maryland 21401  
(301) 267-1438

WA-HAG-140  
Hagerstown Armory  
Washington County  
Geographical Data

Continuation Sheet #2

VERBAL BOUNDARY DESCRIPTION

In Hagerstown, Washington County, Maryland:

Being the southernmost one hundred (100) feet, of all of that lot or parcel of ground situate and lying on the east side of North Potomac Street, Hagerstown, Washington County, Maryland, and having a frontage of one hundred (100) feet, on said street, and extending back there from with that uniform width a distance of two hundred forty (240) feet more or less, to a public alley, and being all of lot No. 287 and the southern eighteen (18) feet, of lot No. 288 on the General plan of Hagerstown Maryland...

CHAIN OF TITLE

Hagerstown Armory  
WA-HAG-140  
Washington County

EO 170/339  
1/15/1925  
Deed

From William P. Lane, Jr., Trustee of Washington County,  
Maryland, to the State of Maryland.

Consideration: \$15,000

## HAGERSTOWN LANDMARKS RECONNAISSANCE SURVEY

Maryland Inventory of Historic Properties # WA-HAG-140


Property Name/Address: Maryland National Guard Armory, 328 North Potomac St.,  
Hagerstown, Maryland

Description/Significance: The 1926 Hagerstown Armory is a brick structure comprising a two-story main block with a one-story drill hall extending to the rear. A pair of towers flank the central entrance. The decorative detailing features battlements and crenellations recalling a Medieval castle or fort. It reflects the reorganization and expansion of the National Guard in the early twentieth century, and also serves as a social center for the Hagerstown community. Listed in the National Register of Historic Places.

### MARYLAND COMPREHENSIVE HISTORIC PRESERVATION PLAN DATA

- I. Geographic Organization: Western Maryland
- II. Chronological/Developmental Period(s):  
Industrial/Urban Dominance, 1870-1930
- III. Prehistoric/Historic Period Theme(s):  
Architecture, Landscape Architecture and Community Planning  
Military
- IV. Resource Type  
Category: Building  
Historic Environment: Urban  
Historic Function(s) and Use(s):  
DEFENSE/arms storage  
Known Design Source: Unknown

Form Prepared by: Peter E. Kurtze  
109 Brandon Road  
Baltimore, Maryland 21212  
August 15, 1991

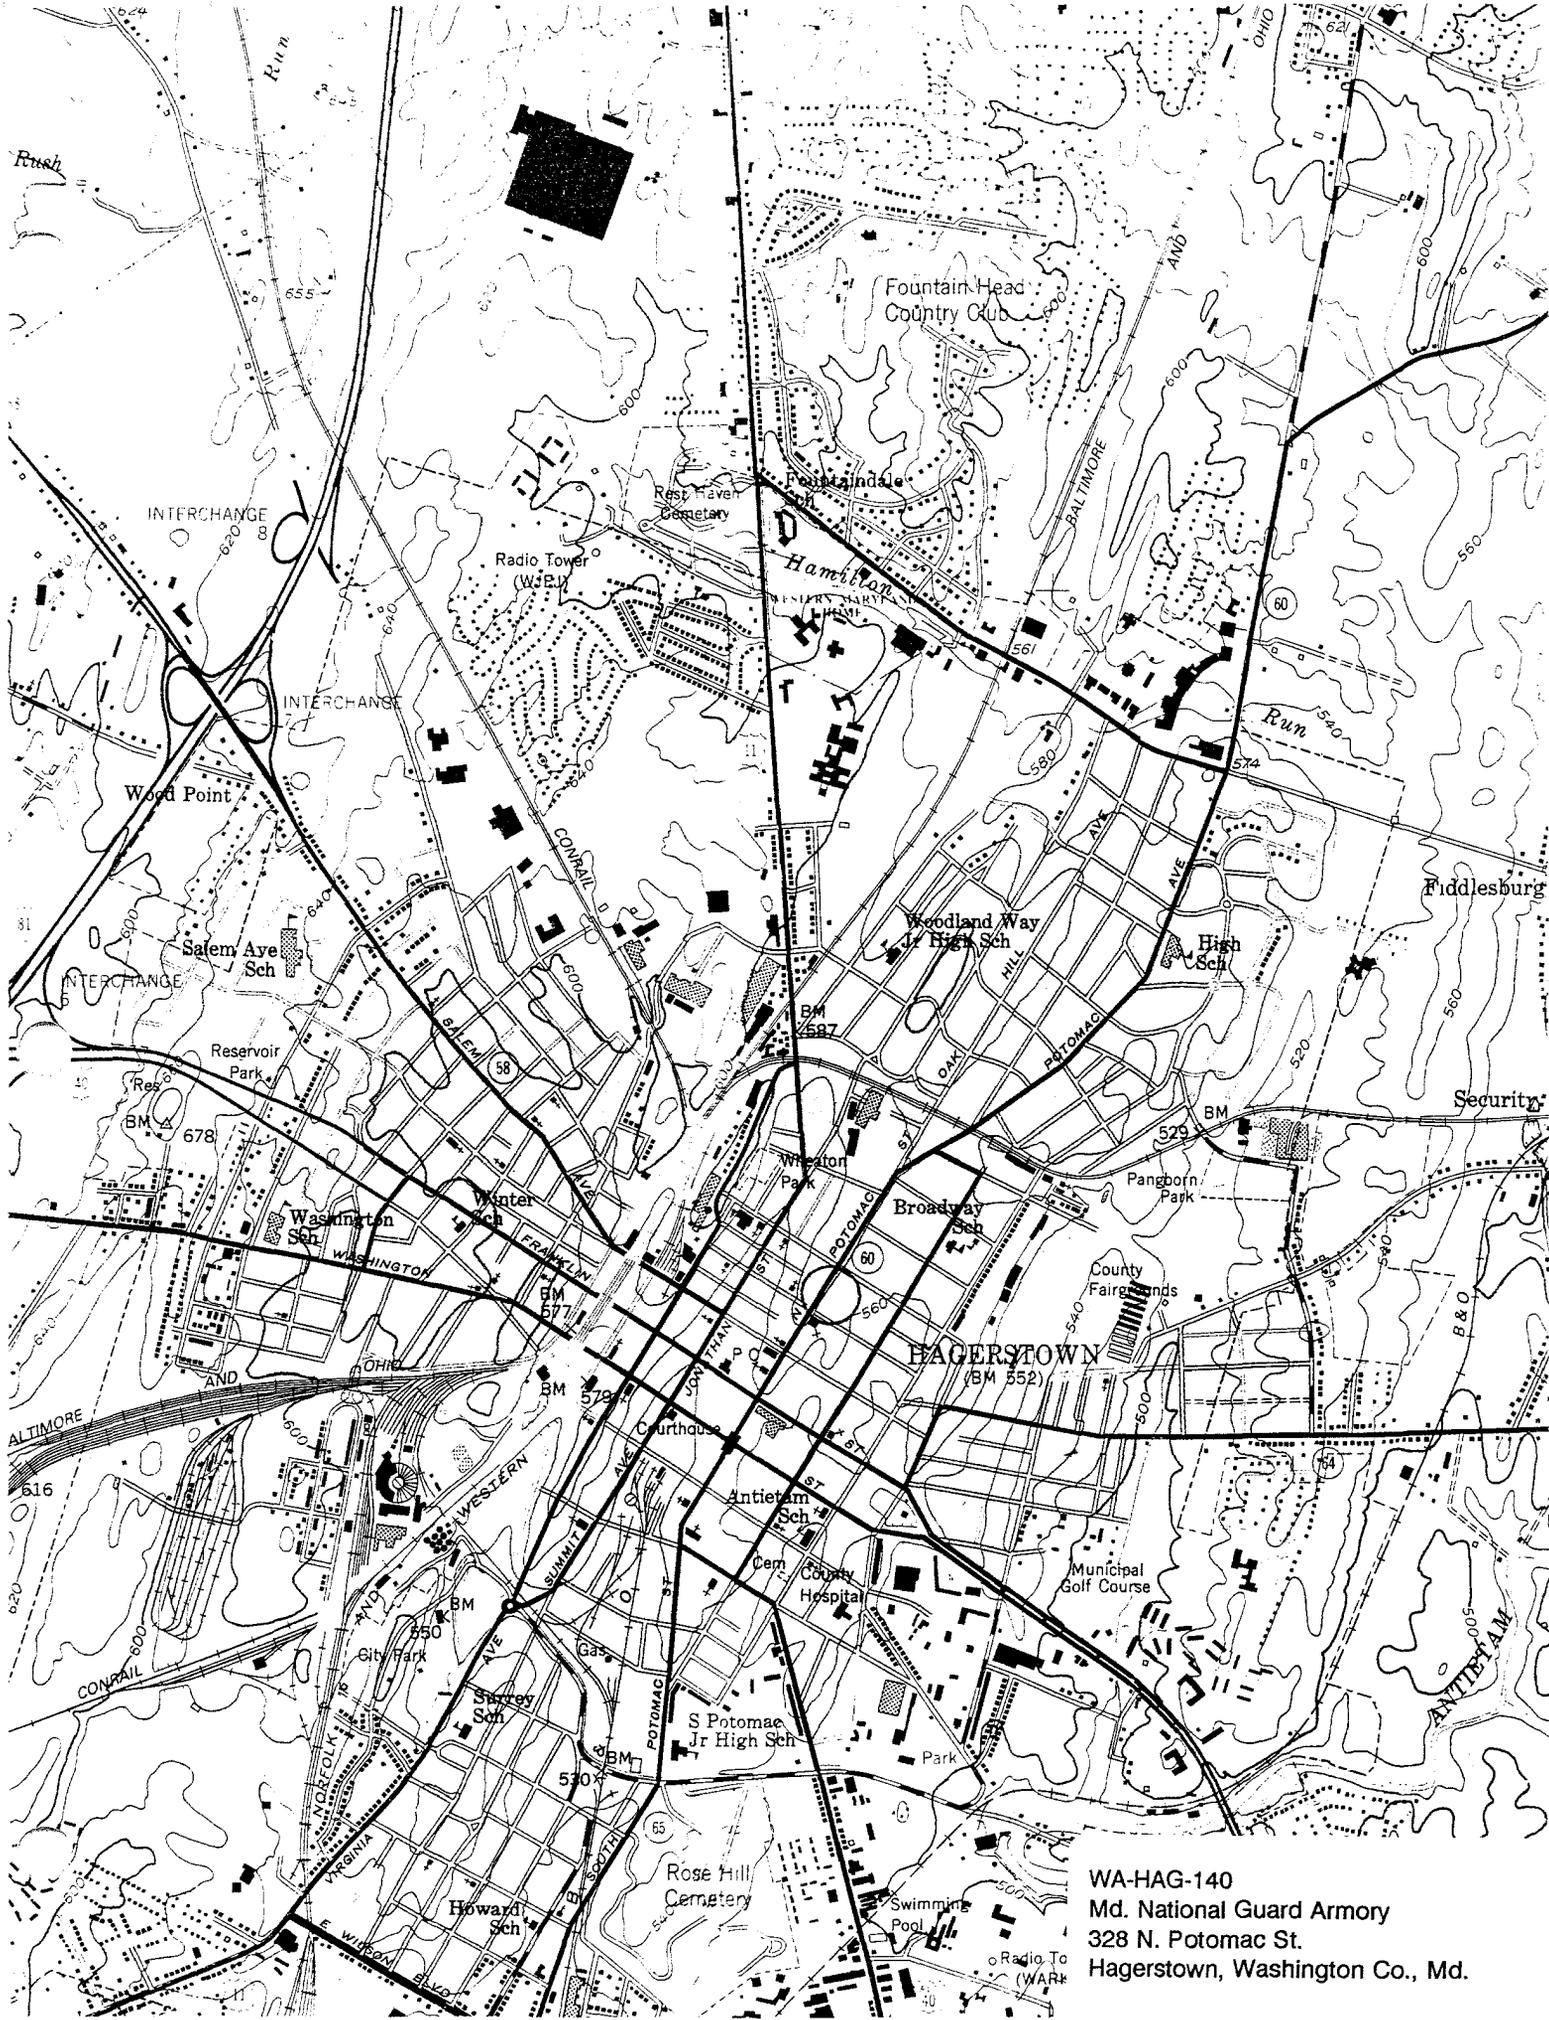

WA-HAG-140  
Md. National Guard Armory  
328 N. Potomac St.  
Hagerstown, Washington Co., Md.

RANDOLPH AVE.

24	22	16	14		
20'	38'-7"	RUTH E. MEANS 682/503	P.T.	ERNEST L. STINE 530/32	300 302 306 310 314 318 41'
P.13	P.12	HARRY F. CARBAUGH			34
JOHN H. JONES					41'
DANIEL L. HOHMAN 341/2					41'
318 N. POTOMAC, INC. 683/517					41'
FRANCES L. ABBOTT 587/188					41'
NATIONAL GUARD ARMORY					
STEPHEN E. NIETO 650/702					24'
SEB, INC. 510/151					338 405
DONALD R. DAILEY 641/252					41'

120'	82'	305	311 313 315	323	329	335	337	345
GERALD N. MINNICK 631/478	ANNA V MOORE 605/577 316/59	205 NORTH POTOMAC, INC.	NATION 672/295					
FLORENCE A. HARMAN								
FLORENCE A. HARMAN								
BESSIE E. WINGERT								
SARAH P. WINGERT 519/331								
RONALD L. COSS 668/635								
RONALD L. CRISS 445/305								
ARTHUR W. HOUGHTON 463/654								
DAVID S. STERN 631/701								

NORTH

NORTH AVENUE

22	20	16			
445/1	446/1	MEYLE ELLIOT	LINDSI MCGRI 425/1	ERNEST W. FINNIFF, JR. 528/446	400 80'
WA-HAG-140					
31/NS 13					412 80'
JACK B. WELSH					418 80'

120'	405	105'	417
FOX & ASSOC., 501/573			
SAMUEL R. ST 643/18			

COPYRIGHT—MAP DIVISION—1967  
MD. DEPT. OF ASSESS. & TAX.





gerstown Armory  
Md Dept of Assessments & Taxation  
Washington County Map No. 41  
Scale: 1" = 100'  
Revised 1 Aug 1979



4994  
 4993  
 4992  
 4991  
 660 000 FEET (MD.)  
 CUMBERLAND 63 MI.  
 HUVERT 27 MI.  
 58  
 60  
 81  
 40  
 655  
 620  
 600  
 580  
 560  
 540  
 520  
 500  
 480  
 460  
 440  
 420  
 400  
 380  
 360  
 340  
 320  
 300  
 280  
 260  
 240  
 220  
 200  
 180  
 160  
 140  
 120  
 100  
 80  
 60  
 40  
 20  
 0  
 -20  
 -40  
 -60  
 -80  
 -100  
 -120  
 -140  
 -160  
 -180  
 -200  
 -220  
 -240  
 -260  
 -280  
 -300  
 -320  
 -340  
 -360  
 -380  
 -400  
 -420  
 -440  
 -460  
 -480  
 -500  
 -520  
 -540  
 -560  
 -580  
 -600  
 -620  
 -640  
 -660  
 -680  
 -700  
 -720  
 -740  
 -760  
 -780  
 -800  
 -820  
 -840  
 -860  
 -880  
 -900  
 -920  
 -940  
 -960  
 -980  
 -1000

Hagerstown Armory WA-HAG-140  
 USGS 7.5 minute map  
 Hagerstown Quadrangle  
 1:24000  
 1943-53

24X

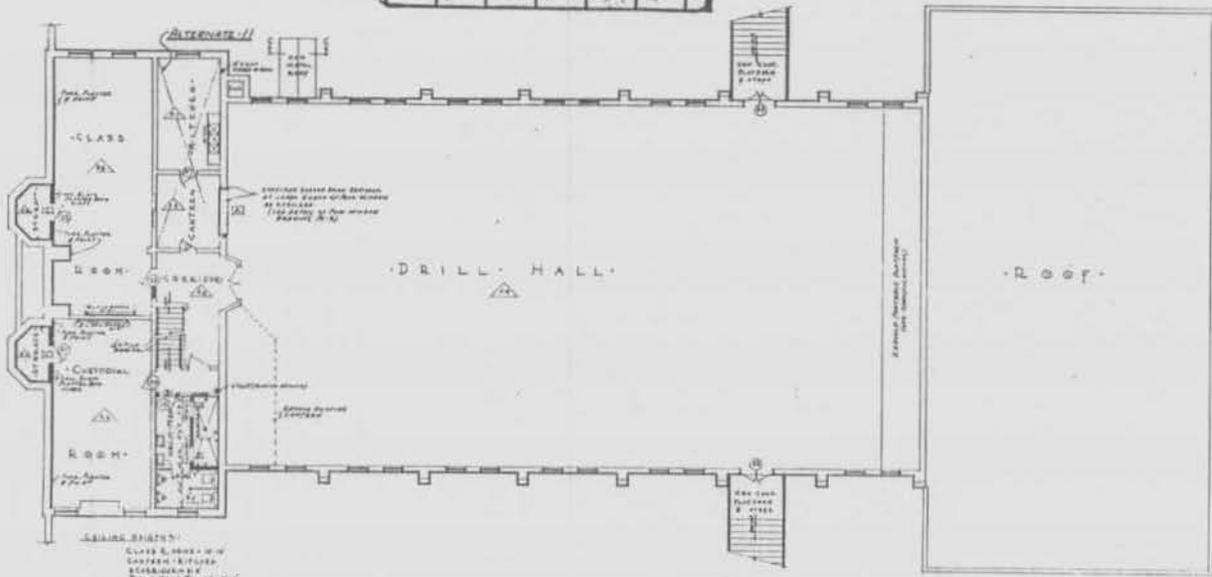

NOMINAL CLEAR DIMENSIONS OF BINS  
HEIGHT 17"  
WIDTH 12 1/2" (TYPICAL)  
DEPTH 18"

DETAILS OF BINS

NOTE: IN THE CONTRACT SPECIFICATIONS REFER TO THE DRAWINGS TO WHICH THIS PLAN APPLIES TO AND READ THE SPECIFICATIONS, NOTES, RECORDS, CHANGE ORDERS, ETC. BEFORE WORK IS INITIATED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.

FIRST FLOOR PLAN  
SCALE 1/4"

REVISION: LOCATION OF ALTERNATE #1

APPROVED  
*[Signature]*  
J. J. [Name]

STATE OF MARYLAND  
OFFICE OF PUBLIC WORKS  
APPROVED July 22, 1944  
*[Signature]*



JAMES PEBLY & ASSOCIATES  
MECHANICAL ENGINEERS  
10 E. PLEASANT ST., BALTIMORE 2, MD.



CHARLES F. DOWLES  
ARCHITECT  
251 E. PATRICK ST., TREPICK, MD.

RENOVATION OF HAGERSTOWN ARMOY  
HAGERSTOWN - MARYLAND  
STATE OF MARYLAND - MILITARY DEP'T.  
GEN. MILTON A. RECKORD - THE ADJ. GENERAL

DWG. NO.  
A-2  
DATE  
MAY 1944

FILE NO. 18 M-201

HAGERSTOWN ARMOY WA-HAG-140  
Reduction from original on file at  
Md Dept of General Services




SECTION THRU TOILET ROOM FLOORS


NOTE FLOOR CONSTRUCTION SHALL BE ALL TOILET ROOMS WITH MORE FLOOR CONSTRUCTION BY NEW PLAN



PLAN




SECTION XX'



ELEVATION

DETAILS OF NEW METAL RAFFLES IN RIFLE RANGE


NINEY GUARD AT BOILER ROOM WINDOW

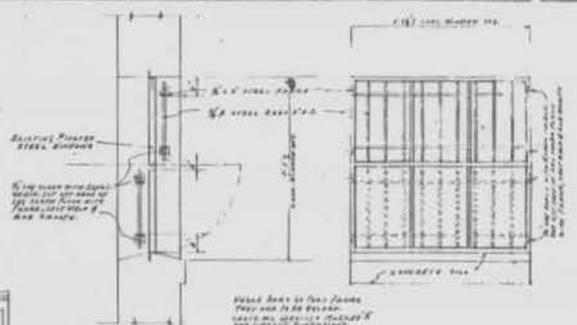

SECTION

ELEVATION

DETAILS OF STEEL GUARDS FOR BASEMENT WINDOWS

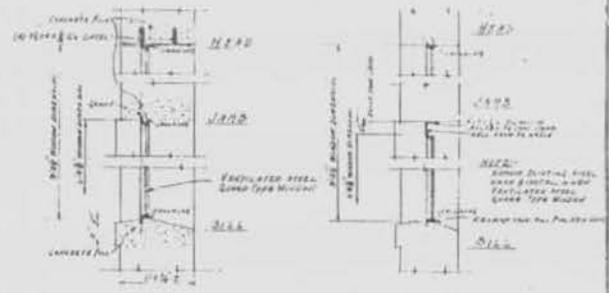


SECTION

SECTION

GABLE TOP WINDOW IN KITCHEN-BREAKFAST

GABLE TOP WINDOW IN BREAKFAST ROOM

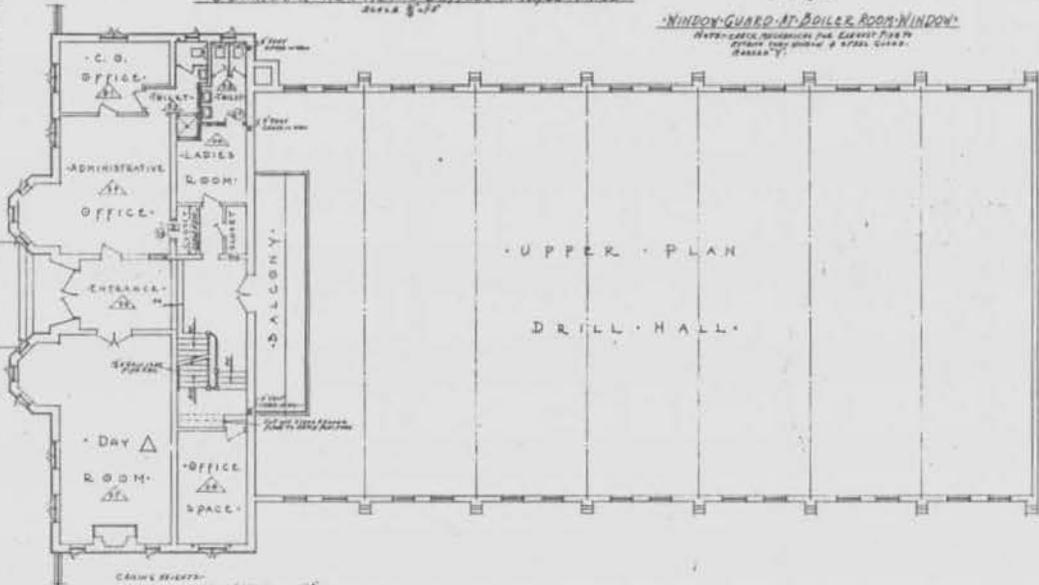

UPPER PLAN

DRILL HALL

SECOND FLOOR PLAN

SCALE 1/4" = 1'-0"

CRANE HEIGHTS:  
 LOWEST CRANE 10'-0"  
 HIGHEST CRANE 12'-0"  
 CRANE CLEARANCE 11'-0"

REVIS: CHANGED NAME OF ROOM

APPROVED  
*[Signature]*

STATE OF MARYLAND  
 DEPARTMENT OF PUBLIC IMPROVEMENTS  
 APPROVED MAY 12, 1917  
*[Signature]*



JAMES POSEY & ASSOCIATES  
 MECHANICAL ENGINEERS  
 10 E. PLEASANT ST., BALTIMORE 2, MD.



CHARLES F. BOWERS  
 ARCHITECT  
 231 E. PATRICK ST., FREDERICK, MD.

RENOVATION OF HAGERSTOWN ARMOY  
 HAGERSTOWN - MARYLAND  
 STATE OF MARYLAND - MILITARY DEPT.  
 GEN. MILTON A. RECORD - THE ADJ. GENERAL

DWG. NO.  
 A-3  
 OF 4 DWGS.  
 DATE  
 MAY 16, 1917




FILE NO. 18 M-202

24X




HAGERSTOWN ARMOY WA-HAG-140  
 Reduction from original on file at  
 Md Dept of General Services


24X




ELEVATION  
SCALE 1/2\"/>

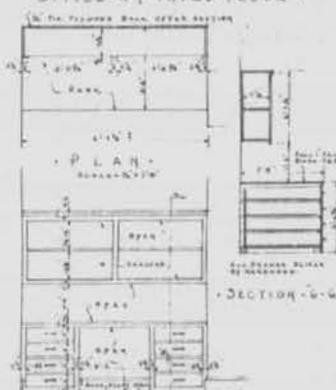

DETAIL OF SHELVING IN OFFICE ON THIRD FLOOR  
SCALE 1/2\"/>

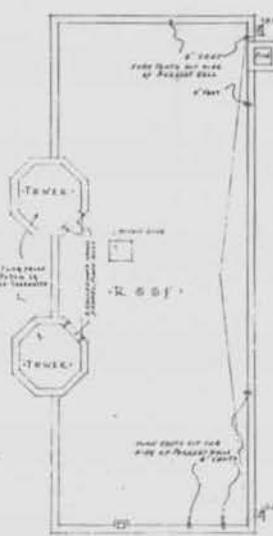

ROOF PLAN  
FRONT HEAD HOUSE  
SCALE 1/2\"/>

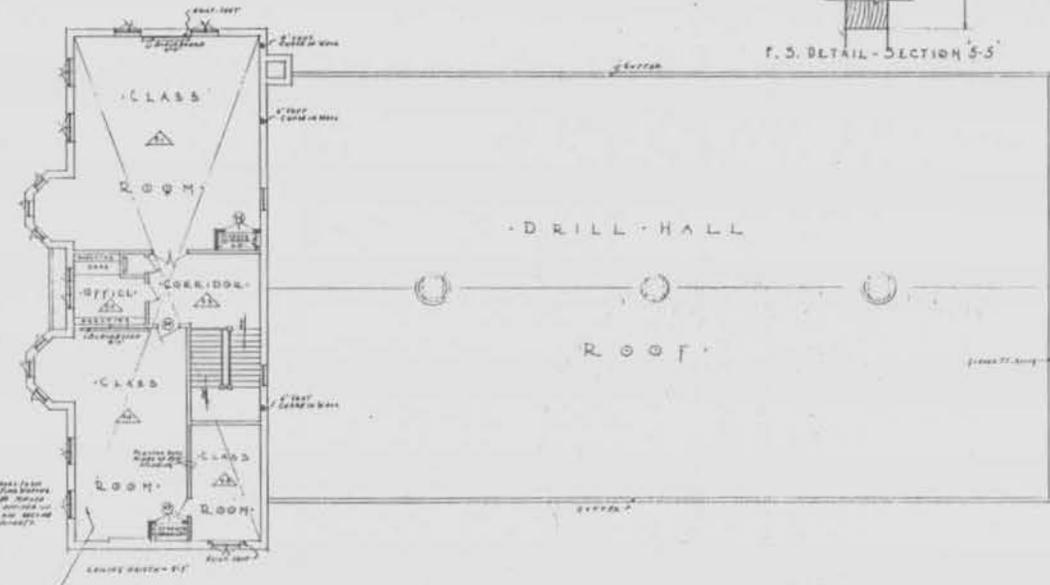

THIRD FLOOR PLAN  
SCALE 1/2\"/>

REVISION: LOCATION OF ALTERNATE 13

APPROVED  
*[Signature]*  
DATE 5/14/33

STATE OF MARYLAND  
DEPARTMENT OF PUBLIC IMPROVEMENTS  
APPROVED MAY 17 1933  
DATE 5/14/33



JAMES POSEY & ASSOCIATES  
MECHANICAL ENGINEERS  
10 E. PLEASANT ST., BALTIMORE 2, MD.



CHARLES F. BOWERS  
ARCHITECT  
251 E. PATRICK ST., FREDERICK, MD.

RENOVATION OF HAGERSTOWN ARMORY  
HAGERSTOWN - MARYLAND  
STATE OF MARYLAND - MILITARY DEPT.  
GEN. MILTON A. RECKORD - THE ADJ. GENERAL

DWG. NO.  
A-4  
OF 2 SHEETS  
DATE  
MAY 14, 1933

FILE NO. 10 M-203

HAGERSTOWN ARMORY WA-HAG-140  
Reduction from original on file  
at Md Dept of General Services



Hagerstown Armory WA-HAG-140  
Washington County, Maryland  
photo: Susanne Moore  
neg loc: Md Hist Trust, Annapolis, Md  
July 1980  
West elevation  
1/3

to c 1926

listed 25 Sept 55



Hagerstown Armory      WA-HAG-140  
Washington County, Maryland  
photo: Susanne Moore  
neg loc: Md Hist Trust, Annapolis, Md  
July 1980  
Southeast corner  
2/3



Hagerstown Armory WA-HAG-140  
Washington County, Maryland  
photo: Susanne Moore  
neg loc: Md Hist Trust, Annapolis, Md  
July 1980  
Southwest corner  
3/3



WA-HAG-140

ARMORY

HAGERSTOWN, WASH CO., MD

7/91 P. KURTZE

VIEW FROM SOUTHWEST



4 11 '02

WA-HAG-140

Old Hagerstown Armory  
Washington Co., MD

K.A. Maher

2-12-52

Drill Hall - West



WA-HAG-140

Old Hagerstown Armory  
Washington County, MD

K A Maher

4-11-02

Drill Hall - Southwest



WA-HAG-148

Old Hagerstown Armory  
Washington Co., MD

K.A. Moler

4-11-02

Drill Hall - southwest



4 11 '02

WIA - HAG - 140


Old Hager's own delivery

10.11.1902

W. A. Baker

4.11.02

Brit. 1.11.02 - East

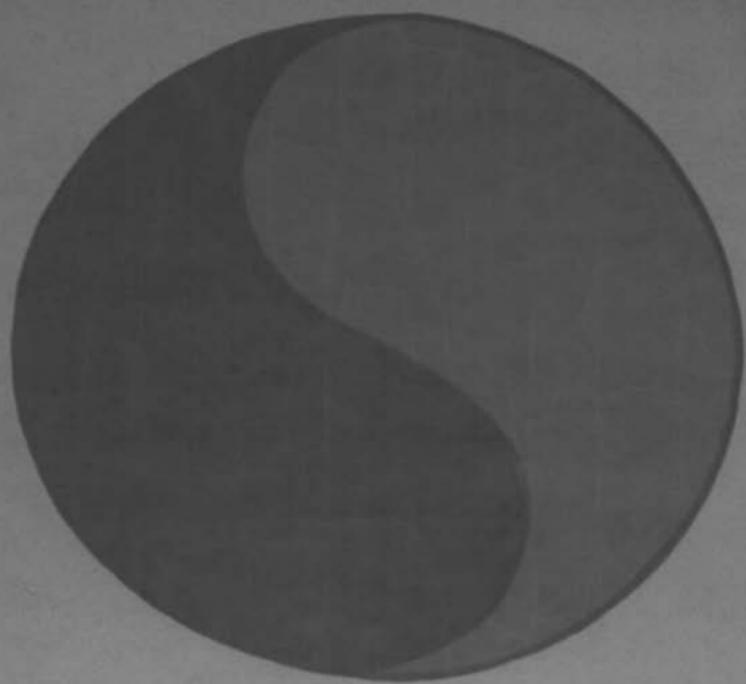

4 1 1 '02

WA-HAG-140

Old Taperstown Armory,  
Washington Co., MD

K.A. Mosher

4-11-02

Yard with Mirrors - Left



4 1 1 ' 0 2

WA - HAG - 140

Old -agersheim Agency  
Washington Co, MD  
K. A. Fisher

4-11-02

Spring Hill Minerals - Center



411 '02

WA-HAG-140

Old Hagerstown Armory  
Washington Co, MD

K. Maher

4-11-02

Drill Hall Murals - Right



411 '02

WA-HAG 140

Old Loperston Armory  
Washington Co., MD

K.A. Mohr

4-11-02

Drill Hill - northeast



411 '02

WA-HAG-140

Old Hagerstown Armory  
Washington Co., MD

K.A. Maher

4-11-02

Entry Hall - North



VIA HAG-120

Old Hagerstown Agency

Washington Co., MD

H. A. Fisher

4-11-07

Entry Hall - South



4 11 '02

WA-HAG-140

Old Hope Farm Amenity  
Washington Co., MD

K.A. Maher

4-11-03

Will Hall - Southeast



411

WA-HAGI-170

Old Hagerstown Armory,  
Washington Co., MD

K.A. Maher

4-11-02

Carby Hill - East



WA-416 170

Old Hagerman Army

Washington - 1901

K.A. Fisher

7-11-02

Springfield - 1901



WA-HAG-140

Old - see - near Anthony

Wash. for 30 min

K.A. Fisher

U-11-02

Erving Coll - 1940



4 11 '02

1911

1) of Virginia Army

Washington D.C.

2) of

4. 11. 02

2) of



4 11 '02

8A - 11. 20

Old - 2000 - 11. 20

Old - 2000 - 11. 20

Old - 2000 - 11. 20

1-11-57

100 - 11 - 57 - 11. 20



4 1 1 '02

W. A. ...

... ..

... ..

... ..

... ..

... ..



1/11/1912

1/11/1912

Washington Co. N.Y.

1/11/1912

1/11/1912

1/11/1912



4 1 1 '02

K.A. HAG - 110

Old Hagerstown Army

Washington Camp, MD

K.A. Mohr

4-11-07

Shooting Range - Southwest



4 11 '02

WA-HAG- '40

Old Georgetown

Washington Co. Md

18th Nov 1940

Dear Sir

Shorty Page. was there?