

Old Main at Frostburg State College  
South side of College Avenue between Maple and Beall Sts.  
Frostburg  
Public

Old Main is the first building to be constructed on the campus of Frostburg State College, originally known as State Normal School No.2 and then Frostburg State Teachers College. Basically unaltered since its construction in 1899, Old Main is a good example of a regional interpretation of late nineteenth century Renaissance Revival architecture. The building continues to serve as classroom and office space for the college.

INVENTORY FORM FOR STATE HISTORIC SITES SURVEY

**1 NAME**

HISTORIC OLD MAIN at Frostburg State College

AND/OR COMMON

**2 LOCATION**

STREET & NUMBER  
College Avenue between Maple and Beall Streets

CITY, TOWN Frostburg VICINITY OF \_\_\_\_\_ CONGRESSIONAL DISTRICT \_\_\_\_\_

STATE Maryland COUNTY Allegany

**3 CLASSIFICATION**

CATEGORY	OWNERSHIP	STATUS	PRESENT USE	
<input type="checkbox"/> DISTRICT	<input checked="" type="checkbox"/> PUBLIC	<input checked="" type="checkbox"/> OCCUPIED	<input type="checkbox"/> AGRICULTURE	<input type="checkbox"/> MUSEUM
<input checked="" type="checkbox"/> BUILDING(S)	<input type="checkbox"/> PRIVATE	<input type="checkbox"/> UNOCCUPIED	<input type="checkbox"/> COMMERCIAL	<input type="checkbox"/> PARK
<input type="checkbox"/> STRUCTURE	<input type="checkbox"/> BOTH	<input type="checkbox"/> WORK IN PROGRESS	<input checked="" type="checkbox"/> EDUCATIONAL	<input type="checkbox"/> PRIVATE RESIDENCE
<input type="checkbox"/> SITE	<b>PUBLIC ACQUISITION</b>	<b>ACCESSIBLE</b>	<input type="checkbox"/> ENTERTAINMENT	<input type="checkbox"/> RELIGIOUS
<input type="checkbox"/> OBJECT	<input type="checkbox"/> IN PROCESS	<input checked="" type="checkbox"/> YES RESTRICTED	<input type="checkbox"/> GOVERNMENT	<input type="checkbox"/> SCIENTIFIC
	<input type="checkbox"/> BEING CONSIDERED	<input type="checkbox"/> YES UNRESTRICTED	<input type="checkbox"/> INDUSTRIAL	<input type="checkbox"/> TRANSPORTATION
		<input type="checkbox"/> NO	<input type="checkbox"/> MILITARY	<input type="checkbox"/> OTHER

**4 OWNER OF PROPERTY**

NAME State of Maryland Contact Dr. Nelson Guild, President  
Frostburg State College, Frostburg, MD  
Telephone #: \_\_\_\_\_

STREET & NUMBER  
Frostburg State College

CITY, TOWN Annapolis, Maryland 21401 VICINITY OF \_\_\_\_\_ STATE, zip code \_\_\_\_\_

**5 LOCATION OF LEGAL DESCRIPTION**

COURTHOUSE  
REGISTRY OF DEEDS, ETC Allegany County Courthouse

Liber #: \_\_\_\_\_  
Folio #: \_\_\_\_\_

STREET & NUMBER  
30 Washington Street

CITY, TOWN Cumberland, Maryland STATE \_\_\_\_\_

**6 REPRESENTATION IN EXISTING SURVEYS**

TITLE

DATE

\_\_\_FEDERAL \_\_\_STATE \_\_\_COUNTY \_\_\_LOCAL

DEPOSITORY FOR  
SURVEY RECORDS

CITY, TOWN \_\_\_\_\_ STATE \_\_\_\_\_

# 7 DESCRIPTION

AL-11-1-003

CONDITION		CHECK ONE	CHECK ONE
<input type="checkbox"/> EXCELLENT	<input type="checkbox"/> DETERIORATED	<input checked="" type="checkbox"/> UNALTERED	<input checked="" type="checkbox"/> ORIGINAL SITE
<input checked="" type="checkbox"/> GOOD	<input type="checkbox"/> RUINS	<input type="checkbox"/> ALTERED	<input type="checkbox"/> MOVED      DATE _____
<input type="checkbox"/> FAIR	<input type="checkbox"/> UNEXPOSED		

DESCRIBE THE PRESENT AND ORIGINAL (IF KNOWN) PHYSICAL APPEARANCE

## ARCHITECTURAL DESCRIPTION

Prominently sited on a rising slope of land, Old Main at Frostburg State Colelge stands on the south side of College Avenue between Main and Beall Streets in Frostburg, Allegany County.

Old Main, constructed in 1899, is a structurally sound and basically unaltered regional example of a Renaissance Revival structure interpreted in brick laid in flemish bond. The cornerstone, located in the northeast corner, is inscribed "Normal School No. 2 September 4, 1899."

The building, which sits on a high stone foundation, consists of three parts: a hip roofed, three-story tall, two-bay wide central section flanked by slightly projecting two-story tall, two-bay wide wings. The first story level of the building is brick to immitate rusticated stone. A belt course of mold-brick egg and dart decoration separates the first story from the second.

The principal (north) facade of the central block is defined by two semi-circular arched openings which shelter a recessed entrance. Brick laid to immitate stone voussoirs articulate both arched openings. An arched doorway is found in the western bay with a similarly arched window opening to the east. The entrance itself consists of a set of multi-paneled double doors surmounted by an oversized, semi-circular, multi-light transom. The flanking arched window is divided into three areas by heavy wooden mullions.

Windows, placed in recessed arched panels, define the corresponding bays of the second and third stories. At the second-story level, the window openings are rectangular and divided into three areas: a central double-hung sashed window flanked by double-hung sashed side lights. Dressed-stone lintels further articulate the window openings. Smaller, double-hung sashed windows appear at either end of these windows.

Between the windows of the second and third story are blank, recessed brick panels.

The window openings of the third story are arched, outlined by pronounced archivolt trim with a molded impost course extending to the end of this central section. The windows are arched and double-hung sashed and surrounded by semi-circular, multi-light transom and side lights. Bulls-eye openings are located on either side of these windows above the molded impost course.

An elaborate, multi-molded, ventilated cornice articulates the roof area of the main block. At the peak of the slate hip roof is a wooden, open, octagonal cupola. Interior, corbel-capped chimneys are located along the east and west walls.

...Continued

CONTINUE ON SEPARATE SHEET IF NECESSARY

PERIOD		AREAS OF SIGNIFICANCE -- CHECK AND JUSTIFY BELOW				
<input type="checkbox"/> PREHISTORIC	<input type="checkbox"/> ARCHEOLOGY-PREHISTORIC	<input type="checkbox"/> COMMUNITY PLANNING	<input type="checkbox"/> LANDSCAPE ARCHITECTURE	<input type="checkbox"/> RELIGION		
<input type="checkbox"/> 1400-1499	<input type="checkbox"/> ARCHEOLOGY-HISTORIC	<input type="checkbox"/> CONSERVATION	<input type="checkbox"/> LAW	<input type="checkbox"/> SCIENCE		
<input type="checkbox"/> 1500-1599	<input type="checkbox"/> AGRICULTURE	<input type="checkbox"/> ECONOMICS	<input type="checkbox"/> LITERATURE	<input type="checkbox"/> SCULPTURE		
<input type="checkbox"/> 1600-1699	<input checked="" type="checkbox"/> ARCHITECTURE	<input checked="" type="checkbox"/> EDUCATION	<input type="checkbox"/> MILITARY	<input type="checkbox"/> SOCIAL/HUMANITARIAN		
<input type="checkbox"/> 1700-1799	<input type="checkbox"/> ART	<input type="checkbox"/> ENGINEERING	<input type="checkbox"/> MUSIC	<input type="checkbox"/> THEÁTER		
<input type="checkbox"/> 1800-1899	<input type="checkbox"/> COMMERCE	<input type="checkbox"/> EXPLORATION/SETTLEMENT	<input type="checkbox"/> PHILOSOPHY	<input type="checkbox"/> TRANSPORTATION		
<input checked="" type="checkbox"/> 1900-	<input type="checkbox"/> COMMUNICATIONS	<input type="checkbox"/> INDUSTRY	<input type="checkbox"/> POLITICS/GOVERNMENT	<input checked="" type="checkbox"/> OTHER (SPECIFY)		
					Local History	
					<hr/>	

SPECIFIC DATES Cornerstone laid: 1899 BUILDER/ARCHITECT

**STATEMENT OF SIGNIFICANCE**

Old Main at Frostburg State College is the first building erected for the school when it was established as State Normal School No. 2 in 1899. The building itself is a good regional example of a Renaissance Revival structure interpreted in brick.

In 1896 through the strong lobbying efforts of Benson Oder, editor and publisher of Frostburg Mining Journal, the State Normal School No. 2 was created by an act of the General Assembly under Governor Lloyd Lowndes. The State appropriated \$20,000 for the construction of Old Main and \$5,000 annually for its maintenance. Ground was broken for the school on June 27, 1899. The following Labor Day, September 4, Joseph Bear, the mayor of Frostburg, laid the cornerstone. The names of all those who contributed to the purchasing of land for the campus site are sealed within the cornerstone. The school opened on September 15, 1902 under the direction of Principal Edmund Dandridge Murdaugh. In 1904, the school graduated its first class of 8 students.

As the second State Normal School (the first being built in Baltimore in 1865) this institution provided training for students to teach in elementary schools. Initially, the program was four years, consisting of math, Latin, history, literature and the sciences. Students also were required to take teaching courses such as "Philosophy of Education," "Philosophy of School Management," "Practice Work," and "Primary Manual Training." This diverse curriculum was necessary in order to accommodate the various academic levels of its student body. Some had 2 years of college; some had high school degrees; some had only elementary school education certificates.

In 1931, the Maryland General Assembly passed an act requiring that elementary school teaching programs offer a minimum of three years to its student body for certification. Officials at State Normal School at Frostburg complied and lengthened its curriculum.

Three years later State Normal School No. 2 graduated into a four-year college known as Frostburg State Teachers College. The college granted a degree of Bachelor of Science in Elementary Education. The institution had taken a dramatic new emphasis -- one of educating rather than training.

As the college grew so too did its curriculum, providing a broad-based liberal arts program, the school became a full-fledged college known today as Frostburg State College. In addition to the variety of Bachelor of Arts and

**CONTINUE ON SEPARATE SHEET IF NECESSARY**

... Continued

**9 MAJOR BIBLIOGRAPHICAL REFERENCES**

Please see attached sheet.

CONTINUE ON SEPARATE SHEET IF NECESSARY

**10 GEOGRAPHICAL DATA**

ACREAGE OF NOMINATED PROPERTY \_\_\_\_\_

VERBAL BOUNDARY DESCRIPTION

LIST ALL STATES AND COUNTIES FOR PROPERTIES OVERLAPPING STATE OR COUNTY BOUNDARIES

STATE COUNTY

STATE COUNTY

**11 FORM PREPARED BY**

NAME, TITLE

Bridget Deale Hartman, Historic Sites Surveyor

ORGANIZATION

Maryland Historical Trust

DATE

May 27, 1980

STREET &amp; NUMBER

21 State Circle

TELEPHONE

CITY OR TOWN

Annapolis, Maryland 21401

STATE

The Maryland Historic Sites Inventory was officially created by an Act of the Maryland Legislature, to be found in the Annotated Code of Maryland, Article 41, Section 181 KA, 1974 Supplement.

The Survey and Inventory are being prepared for information and record purposes only and do not constitute any infringement of individual property rights.

RETURN TO: Maryland Historical Trust  
The Shaw House, 21 State Circle  
Annapolis, Maryland 21401  
(301) 267-1438

ARCHITECTURAL DESCRIPTION (Cont'd)

The rear (south) facade of the main section is five bays, with double-hung sashed windows distinguishing the bays of each of the three stories. The window openings of the first and second stories are rectangular. Those of the third level are arched with semi-circular transoms.

The main (north) facades of the flanking wings are nearly identical. Windows, with 6/2 double-hung sash, occupy the openings of the two bays at both the first and second story levels. Dressed stone lintels and flat-arched brick lintels outline the window openings.

The rear facades of the east and west wings are characterized by first and second story windows positioned very close to the central section.

The east facade of the east wing and the west facade of the west wing have somewhat been altered. The east wing has been connected to Faculty Hall by a one-story brick hyphen. The west wing was at one time connected to Frost Hall by a first story, enclosed wooden sheathed corridor. Old photographs, such as the A. Aubrey Bodine, a copy of which is enclosed in this report, shows this section. Its removal has altered this side of the west wing.

Interior

The interior of Old Main is divided into classroom space. The large number of windows create well-lit open classrooms and hallways in this building. Despite some interior renovations, many of the rooms retain a surprising amount of detail including pressed tin ceilings, multi-paneled wooden classroom doors, door surrounds, baseboards and chairrail moldings in the hallway and classrooms.

STATEMENT OF SIGNIFICANCE (Cont'd)

Bachelor of Science degrees offered, the college has developed postgraduate studies including Master's degrees in Education and Science Management.

Today, Old Main which provided faculty offices, classrooms, science laboratories, an auditorium, and a gymnasium 75 years ago to its early students has known no major renovations. It continues to serve the college classroom and office facilities.

BIBLIOGRAPHY

Stegmaier, Harry, David Dean, Gordon Kershaw, John Wiseman,  
Allegany County - A History, Parsons, West Virginia:  
McClain Printing Co., 1976.

Thomas, James W., Judge T.J.C. Williams, History of Allegany  
County, Maryland, Baltimore, Maryland: Regional Pub-  
lishing Co., 1969.

Van Newkirk, Mary Elizabeth H., Two Histories of Frostburg  
State College (Maryland), From Its Earliest Days to  
the Present, including:

- A. "The Origins of Frostburg State College,"  
Journal of the Alleghenies, Volume II, 1975.
- B. "The Evolution of a College," The Journal  
of Mathematics Education, No. 8 (1974):6-11.

HISTORIC SITE  
 INVENTORY

0101023602

AI-VII-003

MARYLAND HISTORICAL TRUST WORKSHEET

NOMINATION FORM  
 for the  
 NATIONAL REGISTER OF HISTORIC PLACES, NATIONAL PARKS SERVICE

SEE INSTRUCTIONS

<b>1. NAME</b>				
COMMON: Old Main, Frostburg State College				
AND/OR HISTORIC:				
<b>2. LOCATION</b>				
STREET AND NUMBER: College Avenue between Maple & Beall Streets				
CITY OR TOWN: Frostburg				
STATE Maryland		COUNTY: Allegany		
<b>3. CLASSIFICATION</b>				
CATEGORY (Check One)	OWNERSHIP		STATUS	ACCESSIBLE TO THE PUBLIC
<input type="checkbox"/> District <input type="checkbox"/> Site <input type="checkbox"/> Object	<input checked="" type="checkbox"/> Building <input type="checkbox"/> Structure	<input checked="" type="checkbox"/> Public <input type="checkbox"/> Private <input type="checkbox"/> Both	Public Acquisition: <input type="checkbox"/> In Process <input type="checkbox"/> Being Considered	<input checked="" type="checkbox"/> Occupied <input type="checkbox"/> Unoccupied <input type="checkbox"/> Preservation work in progress
PRESENT USE (Check One or More as Appropriate)				
<input type="checkbox"/> Agricultural <input type="checkbox"/> Commercial <input checked="" type="checkbox"/> Educational <input type="checkbox"/> Entertainment	<input type="checkbox"/> Government <input type="checkbox"/> Industrial <input type="checkbox"/> Military <input type="checkbox"/> Museum	<input type="checkbox"/> Park <input type="checkbox"/> Private Residence <input type="checkbox"/> Religious <input type="checkbox"/> Scientific	<input type="checkbox"/> Transportation <input type="checkbox"/> Other (Specify)	<input type="checkbox"/> Comments
<b>4. OWNER OF PROPERTY</b>				
OWNER'S NAME: State of Maryland, Board of Trustees of the State Colleges				
STREET AND NUMBER: Jeffrey Building, 16 Francis Street				
CITY OR TOWN: Annapolis		STATE: Maryland		
<b>5. LOCATION OF LEGAL DESCRIPTION</b>				
COURTHOUSE, REGISTRY OF DEEDS, ETC: Allegany County Courthouse				
STREET AND NUMBER: 30 Washington Street				
CITY OR TOWN: Cumberland		STATE: Maryland		
Title Reference of Current Deed (Book & Pg. #):				
<b>6. REPRESENTATION IN EXISTING SURVEYS</b>				
TITLE OF SURVEY: Maryland Historical Trust Inventory, No. AI-102				
DATE OF SURVEY: 1970				
<input type="checkbox"/> Federal <input checked="" type="checkbox"/> State <input type="checkbox"/> County <input type="checkbox"/> Local				
DEPOSITORY FOR SURVEY RECORDS: Maryland Historical Trust				
STREET AND NUMBER: Shaw House, 21 State				
CITY OR TOWN: Annapolis		STATE: Maryland		

7. DESCRIPTION	
CONDITION	(Check One)
	<input type="checkbox"/> Excellent <input checked="" type="checkbox"/> Good <input type="checkbox"/> Fair <input type="checkbox"/> Deteriorated <input type="checkbox"/> Ruins <input type="checkbox"/> Unexposed
	(Check One)
	<input type="checkbox"/> Altered <input checked="" type="checkbox"/> Unaltered <input type="checkbox"/> Moved <input checked="" type="checkbox"/> Original Site
DESCRIBE THE PRESENT AND ORIGINAL (if known) PHYSICAL APPEARANCE	
<p>Old Main at Frostburg State College stands on the south side of College Avenue, between Maple and Beall Streets, in Frostburg, Allegany County.</p> <p>Old Main is an 1899 Renaissance Revival brick structure that consists of a hip roofed three stories high center section with flanking wings of two stories in height. The principal facade (north side) has a recessed entranceway with an arcaded porch on the first floor and arcaded windows on the third. The bricks of the first floor level are laid in imitation rusticated stone base. The cornerstone, northeast corner, has "Normal School No. 2 September 4, 1899" inscribed on it.</p> <p>Most of the interior rooms have tin ceilings.</p> <p>Old Main is structurally sound and basically unaltered.</p>	

SEE INSTRUCTIONS

B. SIGNIFICANCE			
<b>PERIOD (Check One or More as Appropriate)</b> <input type="checkbox"/> Pre-Columbian <input type="checkbox"/> 16th Century <input type="checkbox"/> 18th Century <input type="checkbox"/> 20th Century <input type="checkbox"/> 15th Century <input type="checkbox"/> 17th Century <input checked="" type="checkbox"/> 19th Century			
<b>SPECIFIC DATE(S) (If Applicable and Known)</b> cornerstone laid 1899			
<b>AREAS OF SIGNIFICANCE (Check One or More as Appropriate)</b>			
<input type="checkbox"/> Aboriginal <input type="checkbox"/> Prehistoric <input type="checkbox"/> Historic <input type="checkbox"/> Agriculture <input checked="" type="checkbox"/> Architecture <input type="checkbox"/> Art <input type="checkbox"/> Commerce <input type="checkbox"/> Communications <input type="checkbox"/> Conservation	<input type="checkbox"/> Education <input type="checkbox"/> Engineering <input type="checkbox"/> Industry <input type="checkbox"/> Invention <input type="checkbox"/> Landscape <input type="checkbox"/> Architecture <input type="checkbox"/> Literature <input type="checkbox"/> Military <input type="checkbox"/> Music	<input type="checkbox"/> Political <input type="checkbox"/> Religion/Phi- losophy <input type="checkbox"/> Science <input type="checkbox"/> Sculpture <input type="checkbox"/> Social/Human- itarian <input type="checkbox"/> Theater <input type="checkbox"/> Transportation	<input type="checkbox"/> Urban Planning <input type="checkbox"/> Other (Specify) <hr/> <hr/> <hr/> <hr/> <hr/> <hr/>
<b>STATEMENT OF SIGNIFICANCE</b>  <p style="margin-left: 40px;">Old Main at Frostburg State College is the first building that was erected for the school. The corner stone was laid in 1899. Frostburg State College was founded as a "Normal" school, a two year institution which generally graduated students to teach in elementary schools.<sup>1</sup> (Burnap letter) The General Assembly passed the act establishing the school in 1893, during the governorship of Lloyd Lowndes, a native of Allegany County. The school opened in 1902 and graduated the first students in 1904. The building, which has had no major renovations, is presently used for classrooms and offices.</p>			

SEE INSTRUCTIONS

**9 MAJOR BIBLIOGRAPHICAL REFERENCES**

Hansrote, H.G. Notes, 1970. On file at Maryland Historical Trust, Annapolis, Maryland.

Burnap, Edward A., Staff Specialist, Board of Trustees of the State Colleges, Annapolis, MD., Letter, 1974, on file at Maryland Historical Trust, Annapolis, Maryland.

**10. GEOGRAPHICAL DATA**

LATITUDE AND LONGITUDE COORDINATES DEFINING A RECTANGLE LOCATING THE PROPERTY			O R	LATITUDE AND LONGITUDE COORDINATES DEFINING THE CENTER POINT OF A PROPERTY OF LESS THAN TEN ACRES		
CORNER	LATITUDE	LONGITUDE		LATITUDE	LONGITUDE	
	Degrees Minutes Seconds	Degrees Minutes Seconds		Degrees	Minutes	Seconds
NW	° ' "	° ' "		°	'	"
NE	° ' "	° ' "		°	'	"
SE	° ' "	° ' "		°	'	"
SW	° ' "	° ' "		°	'	"

APPROXIMATE ACREAGE OF NOMINATED PROPERTY:

Acreage Justification:

SEE INSTRUCTIONS

**11. FORM PREPARED BY**

NAME AND TITLE: Ronald L. Andrews, Historic Site Survey		DATE 6/3/75
ORGANIZATION Tri-County Council for Western Maryland, Inc.		
STREET AND NUMBER: Algonquin Motor Inn, Suite 510		
CITY OR TOWN: Cumberland	STATE Maryland	

**12. State Liaison Officer Review: (Office Use Only)**

Significance of this property is:

National  State  Local

\_\_\_\_\_  
Signature

SUPPLEMENTAL INFORMATION AND PHOTOGRAPHS MAY BE ADDED ON SHEET OF SAME SIZE

<p>1. STATE <b>Maryland</b>          COUNTY <b>Allegany</b>          TOWN <b>Frostburg</b> VICINITY          STREET NO.:</p> <p>ORIGINAL OWNER          ORIGINAL USE          PRESENT OWNER          PRESENT USE          WALL CONSTRUCTION <b>Brick</b>          NO. OF STORIES . .</p>	<p>HISTORIC AMERICAN BUILDINGS SURVEY          INVENTORY</p> <p>2. NAME <b>Frostburg State College          (Normal School)</b>          1899</p> <p>DATE OR PERIOD          STYLE          ARCHITECT          BUILDER</p> <p>3. FOR LIBRARY OF CONGRESS USE</p>
<p>4. NOTABLE FEATURES, HISTORICAL SIGNIFICANCE AND DESCRIPTION <span style="float: right;">OPEN TO PUBLIC <b>Yes</b></span></p> <p>1896--Act of the General Assembly, under Gov. Lloyd Lowndes, of Allegany County, was made to establish a State Normal School at Frostburg, Md.</p> <p>1898--Appropriation of \$20,000 for the building and \$5,000 a year for maintenance.</p> <p>1899--Sept. 4, Cornerstone laid.</p> <p>1902--Sept.15, School opened. OLD MAIN on Loo Street now College Avenue. 57 students.</p> <p>1904--8 students graduated.</p> <p>1912--Gymnasium authorized.</p> <p>1913--Gymnasium opened.</p> <p>1919--First unit of Dormitory opened.</p> <p>1925--Second unit of Dormitory opened.</p> <p>1927--New Auditorium, Gymnasium and central heating.</p> <p>1930--Six room elementary practice school opened. Campus enlarged to 40 acres.</p> <p>1947--Government building purchased and reassembled to house Department of Science (now used by day students). \$227,000 Science building constructed later.</p> <p>1949--Third auditorium, Gymnasium.</p> <p>1954--Lloyd Lowndes Hall completed-\$300,000; Library and Administration building.</p> <p>1955--Compton Hall completed \$647,000. Auditorium &amp; gymnasium.</p> <p>1959--Thomas G. Pullen School, laboratory school opened with kindergarden.</p> <p>1960--Gunter Hall, dining hall, student union.</p> <p>1962--Residence Hall for men and one for women built. 170 acres added in last ten years</p>	
<p>5. PHYSICAL CONDITION OF STRUCTURE <span style="float: right;">--over--</span></p> <p style="text-align: center;"> <span style="margin-right: 100px;">Endangered</span> <span style="margin-right: 100px;">Interior <b>V.Good</b></span> <span>Exterior <b>V.Good</b></span> </p>	
<p>6. LOCATION MAP (Plan Optional)</p> <p>8. PUBLISHED SOURCES (Author, Title, Pages)          INTERVIEWS, RECORDS, PHOTOS, ETC.          School booklets,          Research-Helen S. Hinkle          Normal School research-          Hazel G. Hansrote          both MHT</p>	<p>7. PHOTOGRAPH</p> <p>9. NAME, ADDRESS AND TITLE OF RECORDER          Hazel Groves Hansrote, V. Chairman          Maryland Historical Trust          Sec. Preservation Society          Allegany County          DATE OF RECORD <b>Oct. 22, 1970</b></p>



64

John Leake, of the House of Delegates from Allegany County, in 1898 got an amendment to the appropriations bill through the General Assembly which provided \$20,000 for the establishment of State Normal School # 2 in Frostburg, Md.

Mr. Leake, himself a poorly educated native of Lancashire, England, for his legislative action can be remembered as the "father" of Frostburg State College. His granddaughter, Miss Anna Drucilla Schriener is a teacher at Beall High School (1970).

...News clipping, Sept. 7, 1970....H.G.H.

Faint, mirrored text from the reverse side of the page, appearing as bleed-through. The text is largely illegible due to its orientation and fading.

Faint text at the bottom left of the page, possibly a page number or reference code.

Faint text at the bottom right of the page, possibly a page number or reference code.




OLD MAIN  
AL-VII-A-003

USGS QUAD: Frostburg, Md./Pa.  
SCALE: 1:24000  
DATE: 1949; revised 1974

57 30' 576 LONACONING 5.9 MI WESTERNPORT 14 MI 578 55' 579 MIDLAND JUNG MD 36.4 2 M

SCALE 1:24000




CONTOUR INTERVAL 20 FEET  
NATIONAL GEODETIC VERTICAL DATUM OF 1929




THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS  
FOR SALE BY U. S. GEOLOGICAL SURVEY, RESTON, VIRGINIA 22092  
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

Revised 1974. This information not to be used for navigation.

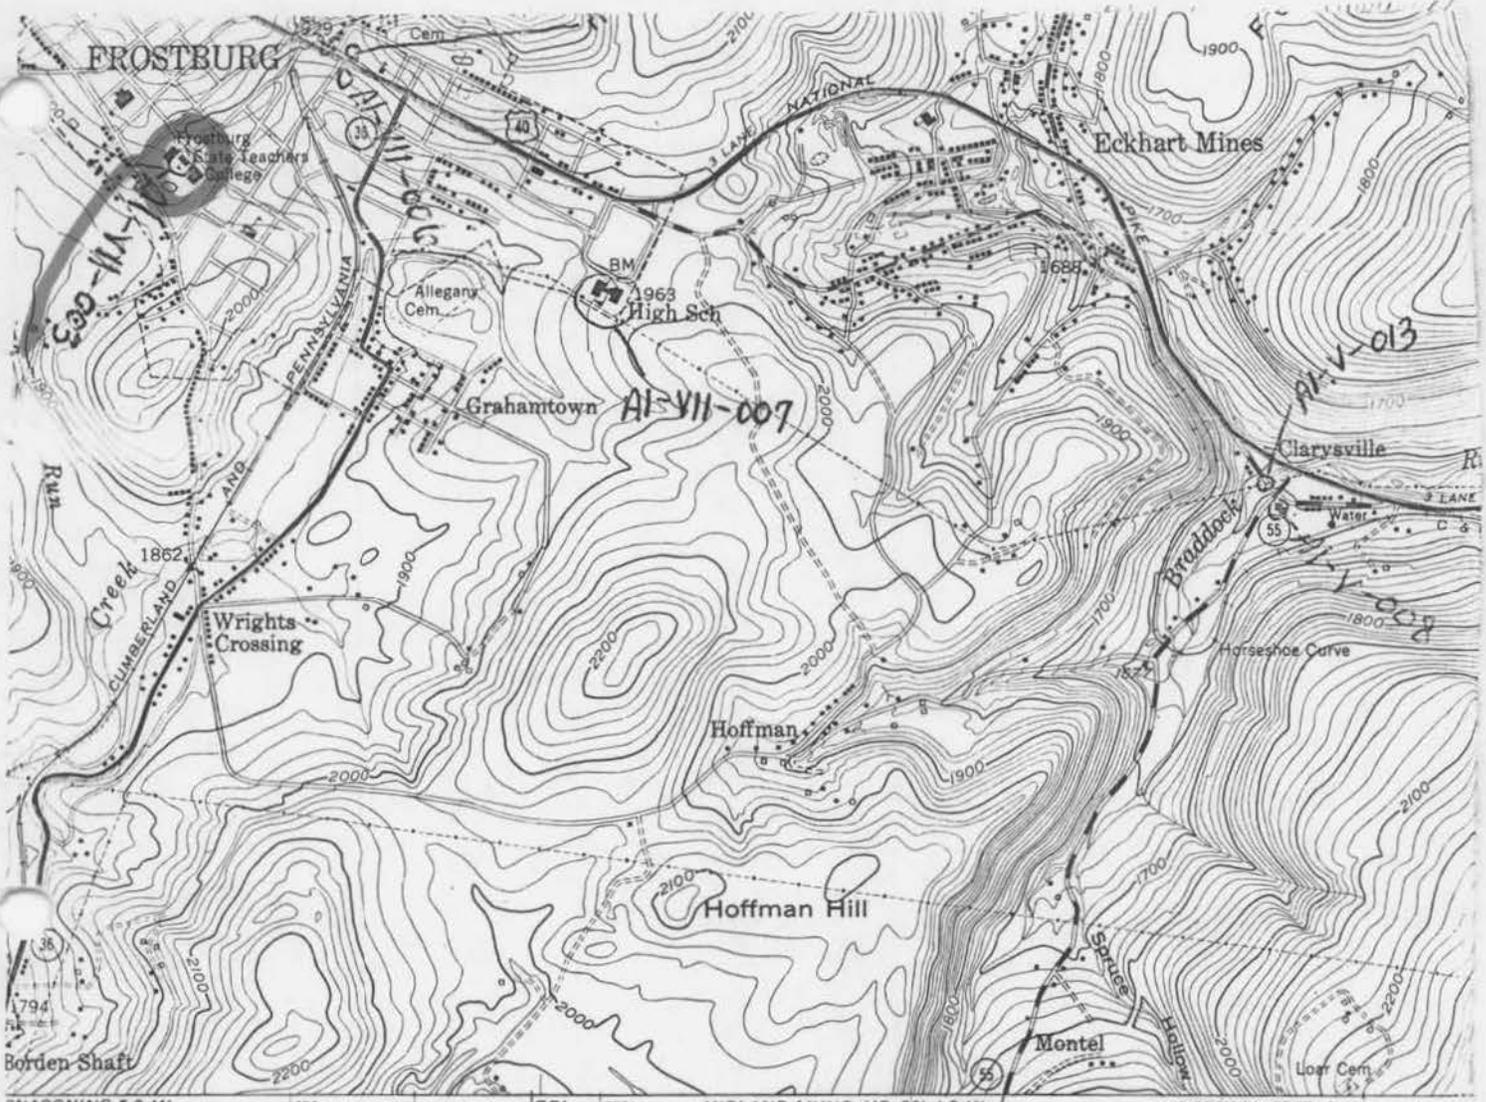

DNACONING 5.9 MI. WESTERNPORT 14 MI. 678 155' 679 MIDLAND (JUNC. MD. 38) 4.2 MI. 1 680 000 FEET (PA.)



ROAD CLASSIFICATION  
 Heavy-duty... 4 LANE | 6 LANE Light-duty  
 Medium-duty... 4 LANE | 6 LANE Unimproved  
 U. S. Route State

Frostburg, MD - PA Quad  
 U.S.G.S. 7.5 minute series  
 1949  
 scale 1:24000

Site #: Al-VII-003  
 Old Main, Frostburg State  
 College  
 College Avenue between Maple  
 & Beall Streets



AL-VII-A-003

OLD MAIN  
Frostburg State College

Photo by: A. Aubrey Bodine  
Taken from: Sunday SUN Magazine 12/11/1960

OLD MAIN

1896



Rept - Helen S. Hinkle - (1970)

03039



Old Main, Frostburg

AL-VII-A-003

4/73 Michael BOURNE



Old Main, Frostburg

AL-VII-A-003

4/73

Michael BOURNE



Old Main  
Frostburg State College  
Frostburg, Maryland  
North view  
June, 1974

N

AJ-VII-003

Ronald L. Andrews



Frostburg State College  
Frostburg, Md.  
Allegheny Co., Md.  
South east view  
June, 1974

CE

RONALD L. ANDREWS

• A1-VII-003



Frostburg State College  
Frostburg, Md.  
Allegheny County, Md.  
South Side  
June, 1974

Card

RONALD L. ANDREWS



Frostburg State College  
Frostburg, Md.  
Allegheny Co., Md.  
North Side  
June, 1974

*Handwritten*

RONALD L. ANDREWS

A1-VII-003



Frostburg State College  
Frostburg, Md.  
Allegany Co., Md.  
East Side  
June, 1974

front floor window  
E side

RONALD L.

AJ-VII-003



Frostberg State College  
Frostberg, Md.  
Allegheny County, Maryland  
First floor Interior  
June, 1974

first floor  
interior

RONA

AJ-VII-003

NORMAL SCHOOL  
No 2  
SEPT 4 1899



Frostburg State College  
Frostburg, Md.  
Allegheny County, Maryland  
cornerstone north side  
June, 1974

cornerstone  
north side

RONALD L. ANDREWS



OLD MAIN

AL-VII-A-003

Frostburg State College

Frostburg, Maryland

NW Elevation

5/80

B.D.Hartman



OLD MAIN

AL-VII-A-003

Frostburg State College

Frostburg, Maryland

SW Elevation

5/80

B.D.Hartman



OLD MAIN


AL-VII-A-003

Frostburg State College  
Frostburg, Maryland

N Elevation

5/80

B.D.Hartman

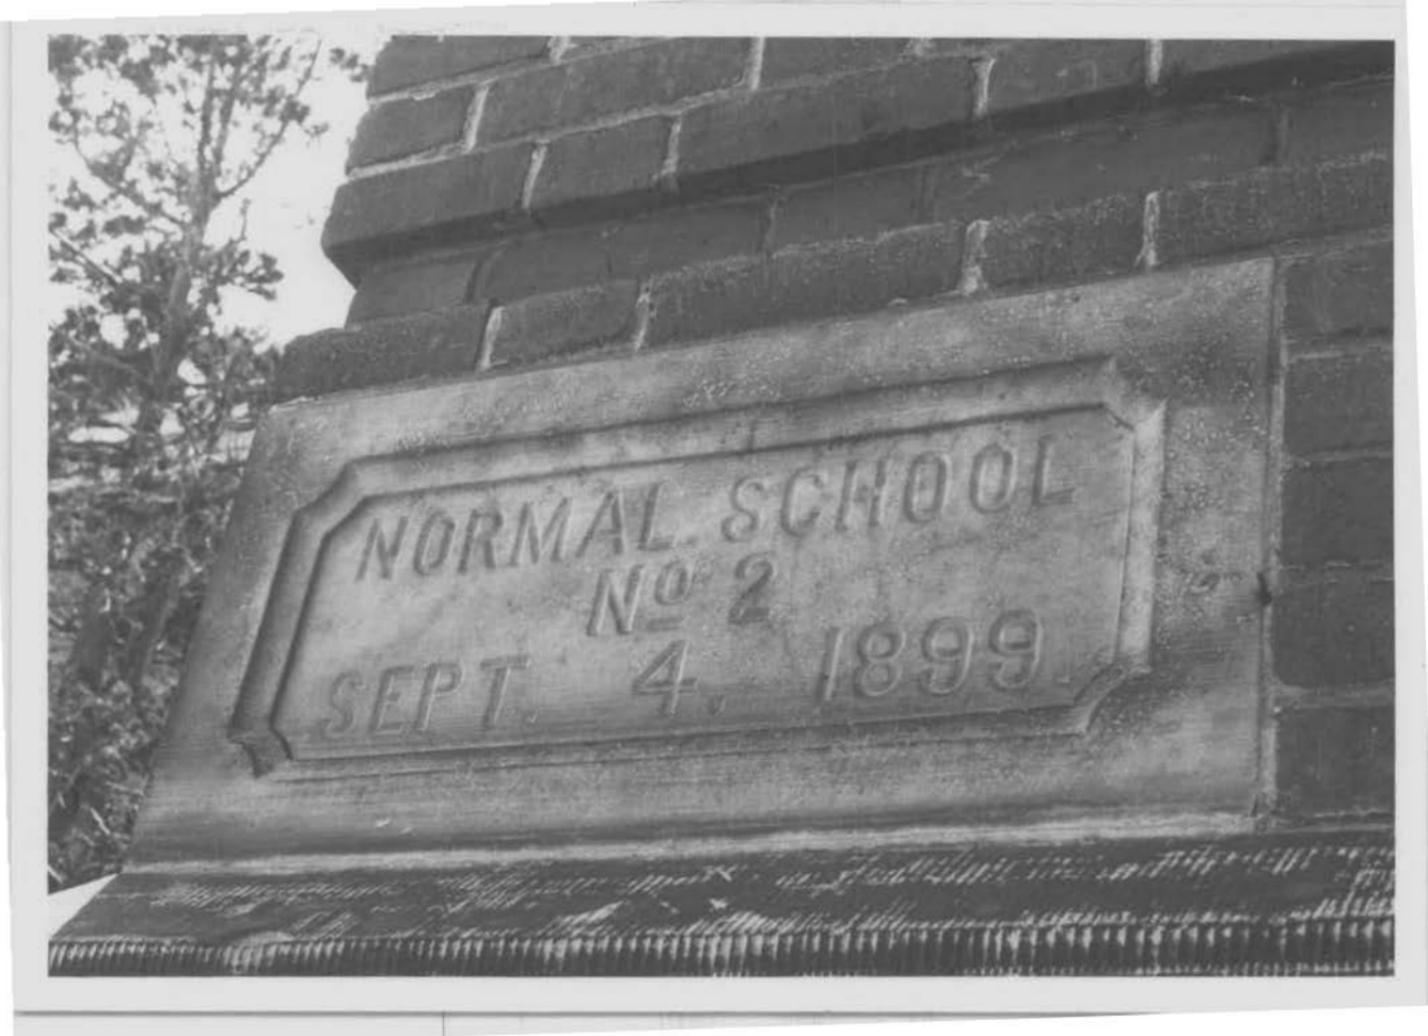

NORMAL SCHOOL  
No 2  
SEPT. 4. 1899

OLD MAIN  
Frostburg State College  
Frostburg, Maryland

AL-VII-A-003

Cornerstone

5/80

B.D.Hartman



OLD MAIN

AL-VII-A003


Frostburg State College

Frostburg, Maryland

Interior classroom

5/80

B.D.Hartman

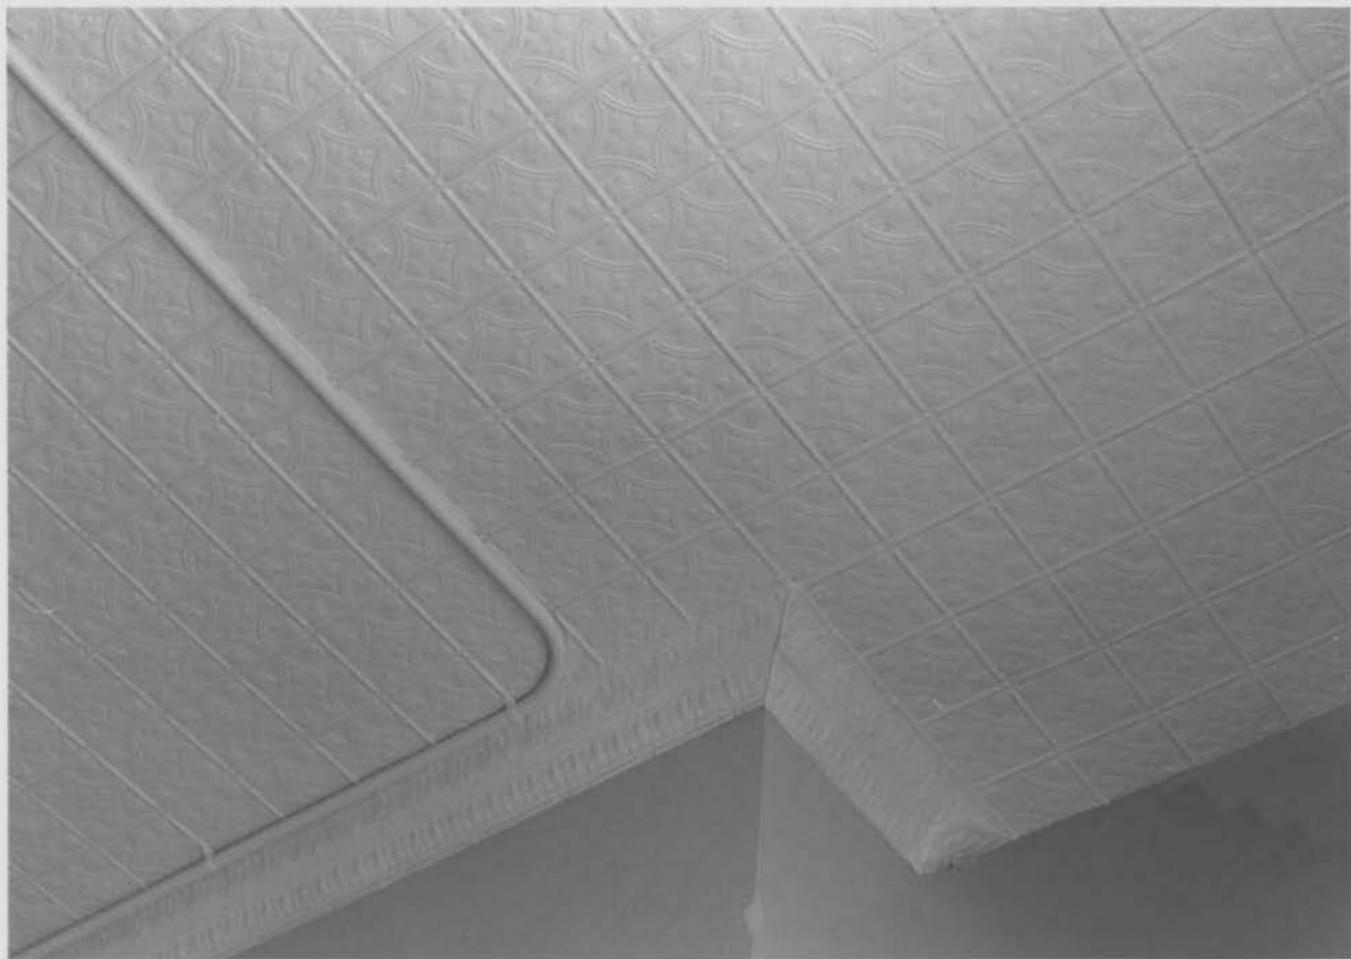

OLD MAIN

AL-VII-A-003

Frostburg State College  
Frostburg, Maryland

Pressed-tin ceiling

5/80

B.D.Hartman

STATE NORMAL SCHOOL.  
FROSTBURG, MD.



AL-~~VI~~<sup>VII</sup>-A-003

Old MAIN at Frostburg State College

N Elevation

Taken from a postcard in the collection of  
Mr/Mrs Blaine Gallimore located at the  
Allegheny Community College library

State Normal School,  
Subject caption Frostburg, Md. \_\_\_\_\_ Print no. \_\_\_\_\_

Date of original \_\_\_\_\_

Type of original print post card \_\_\_\_\_

Photographer \_\_\_\_\_

Historical significance \_\_\_\_\_

Identified individuals \_\_\_\_\_

Holder of original print Mr. + Mrs. Blaine Gallimore

Date copy print made 6/80 \_\_\_\_\_

ALLEGANY COUNTY  
LOCAL HISTORY PROGRAM  
PHOTO DOCUMENTATION AND PRESERVATION PROJECT  
ALLEGANY COMMUNITY COLLEGE

Normal School. Frostburg, Md.

Hazel Wade



VII  
AL-~~100~~-A-003

Old Main at Frostburg State College

SE Elevation

circa 1905

Taken from a postcard in the collection of  
Mr/Mrs Blaine Gallimore located at the  
Allegheny Community College Library

Normal School.  
Subject caption Frostburg, Md. Print no. \_\_\_\_\_

Date of original \_\_\_\_\_

Type of original print post card

Photographer \_\_\_\_\_

Historical significance \_\_\_\_\_

Identified individuals \_\_\_\_\_

Holder of original print Mr. + Mrs. Blaine Gallimore

Date copy print made 6/80

ALLEGANY COUNTY  
LOCAL HISTORY PROGRAM  
PHOTO DOCUMENTATION AND PRESERVATION PROJECT  
ALLEGANY COMMUNITY COLLEGE