

CARR-1299

Jacob Stermer Farm
5225 Wentz Road
Melrose (vicinity)

The Jacob Stermer farm is located on part of the original land patent called "Troy". Its early history seems to be one of speculation, and possibly tenancy being sold every couple of years until purchased in 1833 by George Bowser of Manheim Township, York County, Pennsylvania. Bowser held the farm until 1862 when he sold it to Jacob Stermer for \$3000. The 1876 assessment notes a two-story stone house on the property valued at \$350.00. The two-story stone house currently on the property has a datestone in the east gable end that reads "S.B.S. 1899". Most likely, the existing house was built between 1866 and 1876 for Jacob Stermer and was altered and updated in the late 1890's by his son. The log barn and hog pen were once very common agricultural buildings on the Carroll County landscape but are now very rare, and their survival here is of note.

KS/lh:6/17/92:signif4a.ken

Magi No.

Maryland Historical Trust State Historic Sites Inventory Form

MARYLAND INVENTORY OF
HISTORIC PROPERTIES

DOE yes no

1. Name (indicate preferred name)

historic Jacob Stermer Farm (preferred) George Bowser Farm

and/or common "Springstede"

2. Location

street & number 5225 Wentz Road ___ not for publication

city, town Melrose vicinity of congressional district

state Maryland county Carroll

3. Classification

Category	Ownership	Status	Present Use	
<input type="checkbox"/> district	<input type="checkbox"/> public	<input checked="" type="checkbox"/> occupied	<input checked="" type="checkbox"/> agriculture	<input type="checkbox"/> museum
<input checked="" type="checkbox"/> building(s)	<input checked="" type="checkbox"/> private	<input type="checkbox"/> unoccupied	<input type="checkbox"/> commercial	<input type="checkbox"/> park
<input type="checkbox"/> structure	<input type="checkbox"/> both	<input type="checkbox"/> work in progress	<input type="checkbox"/> educational	<input checked="" type="checkbox"/> private residence
<input type="checkbox"/> site	Public Acquisition	Accessible	<input type="checkbox"/> entertainment	<input type="checkbox"/> religious
<input type="checkbox"/> object	<input type="checkbox"/> in process	<input checked="" type="checkbox"/> yes: restricted	<input type="checkbox"/> government	<input type="checkbox"/> scientific
	<input type="checkbox"/> being considered	<input type="checkbox"/> yes: unrestricted	<input type="checkbox"/> industrial	<input type="checkbox"/> transportation
	<input checked="" type="checkbox"/> not applicable	<input type="checkbox"/> no	<input type="checkbox"/> military	<input type="checkbox"/> other:

4. Owner of Property (give names and mailing addresses of all owners)

name Roger E. Nelson, J.

street & number 5225 Wentz Road telephone no.: 374-6877

city, town Manchester state and zip code Maryland 21102

5. Location of Legal Description

courthouse, registry of deeds, etc. Courthouse Annex liber 677

street & number 55 North Court Street folio 264

city, town Westminster state Maryland

6. Representation in Existing Historical Surveys

title

date federal state county local

depository for survey records

city, town state

7. Description

Survey No. CARR-1299

Condition

- excellent
- good
- fair

- deteriorated
- ruins
- unexposed

Check one

- unaltered
- altered

Check one

- original site
- moved date of move _____

Prepare both a summary paragraph and a general description of the resource and its various elements as it exists today.

Summary: The Jacob Stermer Farm, at 5225 Wentz Road, is located on the southeast side of the road, halfway down a steep ridge. The rubble fieldstone house with stone quoins is a two-story, four-bay banked structure with its primary facade facing south, away from the road. This elevation is probably of Pennsylvania Farmhouse plan with two central entrances. The second story has four 9/9 double hung sash. There is a console cornice with applied jigsaw trim on the fascia. Just below the gable peak of the east elevation is a datestone that reads "S.B.S. 1899." Attached to the west elevation of the house by recent infill is a banked, one-story, two-bay rubble fieldstone summer kitchen. The barn is a V-notched, double-crib log structure on a banked rubble fieldstone foundation. The whole barn is sided in corrugated metal. The hog pen is a one-story, V-notched log and frame building with board-and-batten siding on a rubble stone foundation. The building was constructed in two stages, first with a log crib that was added onto with a frame expansion on the southwest and northwest sides.

The Jacob Stermer Farm, at 5225 Wentz Road, is located on the southeast side of the road, halfway down a steep ridge. It is about two miles north-northeast of Melrose and about one-quarter of a mile south of the Maryland-Pennsylvania border. The farm complex consists of a stone house and stone summer kitchen now attached to the west end, a log barn to the east, a log hog pen between the two, and several other out buildings. They are laid out on a linear plan. Wentz Road formerly curved around the house and barn, coming very close to the latter, but has been relocated north in the twentieth century. The old road bed survives now as a driveway for the farm.

The rubble fieldstone house with stone quoins is a two-story, banked structure with its primary facade facing south, away from the road. This elevation has an exposed foundation wall of four bays, with 6/6 double hung sash and a new door in the third bay. There is a new one-story enclosed porch on a stuccoed masonry foundation that probably replaces a similar original porch. This porch obscures the first story, which is probably of Pennsylvania Farmhouse plan with two central entrances. The second story has four 9/9 double hung sash. There is a console cornice with applied jigsaw trim on the fascia, centered over each window and wrapped around the corners. The gable roof is now covered with wood shakes, but was reportedly originally sheathed with slate. There is an external brick chimney of recent vintage centered on the west elevation. The east elevation is two bays, with 9/9 double hung sash on both stories and 1/1 sash in the gable end. Just below the peak is a datestone that reads "S.B.S. 1899." The north elevation is three bays, with 9/9 double hung sash and a new door in the west bay of the first story. The cornice is identical to the south elevation, again with the trim centered over each

Description (continued)

Section 7 Page 2

window and the consoles between them. There is a one-story, two-bay porch with recent foliate steel posts in the center and west bays of the first story.

Attached to the west elevation of the house by recent infill is a banked, one-story, two-bay rubble fieldstone summer kitchen. The north elevation has a new door in the east bay and new 4/4 sash in the west bay. The west elevation has a single nine-light sash in the cellar, a new 4/4 sash in the first story, and a four-light sash in the gable end. The south elevation has a single eight-light sash in the west bay of the cellar and a vertical board door in the east bay. The first story has a recent 15-light bow window. There is a wood shake gable roof with internal brick chimney centered on the east elevation.

The barn is a V-notched, double crib log structure on a banked rubble fieldstone foundation with stone quoins and a rebuilt cantilevered overshoot facing south. The ramp on the north elevation spans the entire length of the barn. The east and west elevations each have two wood vents with diamond-section louvers. The south elevation of the lower story is rubble fieldstone and is ten bays, alternating with a door, vent, door, vent, two doors, vent and door. The doors are all re-built vertical beaded-edge board dutch doors on new strap hinges, and the vents all have diamond-section wood louvers.

The upper story has been cut back and the wall rebuilt due to deterioration. It is now five bays, with three nine-light windows separated by two corrugated metal doors. The whole barn is sided in this corrugated metal. The east and west elevations have a louvered vent in the gable end. The north elevation contains a roll-up door in the east bay and large double doors on rollers in the center. The gable roof has a longer slope on the south, and is covered with standing seam metal, with three recent ridge vents that are square in plan.

The hog pen is a one-story, V-notched log and frame building with board-and-batten siding on a rubble stone foundation. It has a standing seam metal gable roof. The northwest elevation has two openings high on the wall. The southeast elevation has four or five low openings that provided access to the pens for the hogs. The building was constructed in two stages, first with a log crib. That was added on to with a frame expansion on the southwest and northwest sides. The structure is deteriorating and is open to the elements now.

North of the house is a wagon shed with corrugated metal siding over beaded-edge, tongue-and-groove vertical wood siding and a standing seam metal roof. It is three bays long with two light sash that have flat wood surrounds with gabled pediments above.

MARYLAND HISTORICAL TRUST
STATE HISTORIC SITES INVENTORY FORM

Survey No. CARR-1299

Description (continued)

Section 7 Page 3

The east end has roll-up door with a beaded-edge, tongue-and-groove vertical board dutch door to the south of it. South of the barn is a poultry house with corrugated metal siding and offset gable roof with standing seam metal covering. The entrance is through a vertical, beaded-edge, tongue-and-groove wood dutch door on the west end.

KS/lh:6/4/92:descrip4.ken

8. Significance

Survey No. CARR-1299

Period	Areas of Significance—Check and justify below			
<input type="checkbox"/> prehistoric	<input type="checkbox"/> archeology-prehistoric	<input type="checkbox"/> community planning	<input type="checkbox"/> landscape architecture	<input type="checkbox"/> religion
<input type="checkbox"/> 1400-1499	<input type="checkbox"/> archeology-historic	<input type="checkbox"/> conservation	<input type="checkbox"/> law	<input type="checkbox"/> science
<input type="checkbox"/> 1500-1599	<input checked="" type="checkbox"/> agriculture	<input type="checkbox"/> economics	<input type="checkbox"/> literature	<input type="checkbox"/> sculpture
<input type="checkbox"/> 1600-1699	<input checked="" type="checkbox"/> architecture	<input type="checkbox"/> education	<input type="checkbox"/> military	<input type="checkbox"/> social/ humanitarian
<input type="checkbox"/> 1700-1799	<input type="checkbox"/> art	<input type="checkbox"/> engineering	<input type="checkbox"/> music	<input type="checkbox"/> theater
<input checked="" type="checkbox"/> 1800-1899	<input type="checkbox"/> commerce	<input type="checkbox"/> exploration/settlement	<input type="checkbox"/> philosophy	<input type="checkbox"/> transportation
<input type="checkbox"/> 1900-	<input type="checkbox"/> communications	<input type="checkbox"/> industry	<input type="checkbox"/> politics/government	<input type="checkbox"/> other (specify)
		<input type="checkbox"/> invention		

Specific dates _____ **Builder/Architect** _____

check: Applicable Criteria: A B C D
and/or

Applicable Exception: A B C D E F G

Level of Significance: national state local

Prepare both a summary paragraph of significance and a general statement of history and support.

Summary: The Jacob Stermer farm is located on part of the original land patent called "Troy". Its early history seems to be one of speculation, and possibly tenancy being sold every couple of years until purchased in 1833 by George Bowser of Manheim Township, York County, Pennsylvania. Bowser held the farm until 1862 when he sold it to Jacob Stermer for \$3000. The 1876 assessment notes a two-story stone house on the property valued at \$350.00. The two-story stone house currently on the property has a datestone in the east gable end that reads "S.B.S. 1899". Most likely, the existing house was built between 1866 and 1876 for Jacob Stermer and was altered and updated in the late 1890's by his son. The log barn and hog pen were once very common agricultural buildings on the Carroll County landscape but are now very rare, and their survival here is of note.

Historic Period: Agriculture, Architecture
 Geographic Organization: Piedmont
 Chronological/Development Period: Agricultural-Industrial Transition A.D. 1815-1870
 Industrial/Urban Dominance A.D. 1870-1930
 Resource Types: Small Family Farmstead, Rural vernacular

The Jacob Stermer farm is located on part of the original land patent called "Troy." Its early history seems to be one of speculation, and possibly tenancy, being sold every couple of years until purchased in 1833 by George Bowser of Manheim Township, York County, Pennsylvania. The parcel consisted of 145 acres and sold for \$1300. This seems to mark the beginning of the tract as a working farm. The current owner of the property judged the Log Barn, based on unknown sources, to have been built around 1840, and the date is probably pretty accurate. The log hog pen on the property was probably constructed in the period 1833-1840 as well. The 1841 tax assessment does not list out-buildings on the property, but it does tell us that Bowser had a stone house and that the value of his farm was now up to \$2030.00. Clearly he was a successful farmer, for his livestock was worth \$322.00. What happened to the stone house we can't be

Significance (continued)

Section 8 Page 2

sure, for by 1852 he was living in a wood house. Bowser's farming operation seems to have shrunk for his livestock was now only worth \$112, but this was still an average valuation. Bowser held the farm until 1862 when he sold it to Jacob Stermer for \$3000.

Stermer, too, seems to have been a successful farmer, the value of his livestock at \$636.00 being inordinately high. He also owned \$115.00 worth of farm machinery, indicating that he was a progressive agrarian. This no doubt helps to account for his success. The 1866 assessment, which values the 145 acre farm at \$3625.00, lists a log house and frame barn on the property. Most likely this is an error and should have read frame house and log barn, or perhaps both were log but the appraiser did not realize that the barn, then covered with siding, was of log construction. A log barn does exist on the property, but is not likely that a log barn would have been built after 1866. At any rate, the 1876 assessment notes that a log barn was standing on the property and with the other out-buildings was worth \$500. More interesting is the mention of a two-story stone house on the property valued at \$350.00. The two-story stone house currently on the property has a datestone in the east gable end that reads "S.B.S. 1899", suggesting that it was constructed after Jacob Stermer died and the farm was purchased by his son, Samuel Stermer, in 1894. Yet the assessments do not list any additions, or new construction on the farm between 1876 and 1910. Most likely, then, the existing house was built between 1866 and 1876 for Jacob Stermer and was altered and updated in the late 1890's by his son, who out of pride, rechristened the house by installing a new datestone. There are other recorded instances of this process elsewhere in Carroll County. The interior of the house was not accessible for examination of construction details and finishes that might corroborate this supposition.

Jacob Stermer seems to have remained a prosperous husbandman. His livestock in 1876 of four horses worth \$200.00, six cattle worth \$170.00, five sheep worth \$10.00, and seven hogs worth \$48.00 is above the average. The inventory compiled in November 1892 following his death creates a good portrait of a Carroll County farm in this period. Stermer had obviously scaled back his operation as he got older, so that now he had one horse, two cows, three hogs, three pigs, and 30 chickens. In his possession, and probably stored in the barn, were about 50 bushels of wheat, 75 of rye, 100 of oats, 17 of potatoes, and about 30 barrels of corn. There was also grain still in the ground. In 1876 he had owned a Rockaway (carriage) and buggy. He still owned a carriage and held a half-interest in a springwagon, as well as the necessary harness. In his house, Stermer had a table, sink and water bend, twelve chairs, a cupboard, clock, sewing machine, drawer, four beds, two chests, a bureau, a lounge, a cradle, a looking glass, benches, a coal stove, about 30 yards of carpet, an oil cloth (a predecessor of linoleum, for covering the floor), a kettle, tubs, buckets and cooking tools. The sale of his personal property identified other household goods, including two rocking chairs, a spinning wheel, coffee mill, wash machine, churn, krout cutter, gun and quilt. Also

Significance (continued)

Section 8 Page 3

listed were foodstuffs, giving one an idea of the variety available in the diet of Carroll Countians at the end of the last decade. This included blackberries, cucumbers, cabbage, dried apples, apple butter, pear butter, grapes and vinegar. The amount garnered in the sale of all these items was \$975.64.

Jacob sold off a large portion of his land, 59 acres, (possibly to a son to set up his own farm), at an unknown date. The remaining 86 acres stayed in the Stermer family at least until 1962, which would have been 100 years, or three generations. The log barn and hog pen were once very common agricultural buildings on the Carroll County landscape but are now very rare, and their survival here is of note. Where most log barns are double crib structures separated by a threshing floor and with a frame overshoot, this barn has two threshing floors between the two cribs. The threshing floors are separated by a framed bent. There is also an additional framed bay on the east end of the barn.

9. Major Bibliographical References

Survey No. CARR-1299

Carroll County Land Records, Baltimore County Land Records
Tax Assessments, 1841, 1852, 1866, 1876, 1876-96, 1896-1910
1862 & 1877 Maps
Jacob Stermer Inventory GMP 15-247

10. Geographical Data

Acreage of nominated property 41.48 acres

Quadrangle name Manchester

Quadrangle scale 1:24000

UTM References do NOT complete UTM references

A	<input type="text"/>	<input type="text"/>	<input type="text"/>
	Zone	Easting	Northing

B	<input type="text"/>	<input type="text"/>	<input type="text"/>
	Zone	Easting	Northing

C	<input type="text"/>	<input type="text"/>	<input type="text"/>
---	----------------------	----------------------	----------------------

D	<input type="text"/>	<input type="text"/>	<input type="text"/>
---	----------------------	----------------------	----------------------

E	<input type="text"/>	<input type="text"/>	<input type="text"/>
---	----------------------	----------------------	----------------------

F	<input type="text"/>	<input type="text"/>	<input type="text"/>
---	----------------------	----------------------	----------------------

G	<input type="text"/>	<input type="text"/>	<input type="text"/>
---	----------------------	----------------------	----------------------

H	<input type="text"/>	<input type="text"/>	<input type="text"/>
---	----------------------	----------------------	----------------------

Verbal boundary description and justification

List all states and counties for properties overlapping state or county boundaries

state	code	county	code

state	code	county	code

11. Form Prepared By

name/title Kenneth M. Short, Historic Planner

organization Carroll County Department of Planning

date June 19, 1992

street & number 225 North Center Street

telephone (410) 857-2145

city or town Westminster

state Maryland

The Maryland Historic Sites Inventory was officially created by an Act of the Maryland Legislature to be found in the Annotated Code of Maryland, Article 41, Section 181 KA, 1974 supplement.

The survey and inventory are being prepared for information and record purposes only and do not constitute any infringement of individual property rights.

return to: Maryland Historical Trust
Shaw House
21 State Circle
Annapolis, Maryland 21401
(301) 269-2438


MARYLAND HISTORICAL TRUST
DHCP/DHCC
100 COMMUNITY PLACE
CROWNSVILLE, MD 21032-2023
514-7600

CAK 1299
5225 Wentz Road


CHAIN OF TITLE

GRANTOR	HOME COUNTY	GRANTEE	HOME COUNTY	DATE	LIBER	FOLIO	TRANS ACTION	COMMENTS
Robert Leroy & Margey Lou Poetzman	Carroll	Roger E. & Mary B. Nelson, Jr.	Arlington, VA	8-31-1977	CCC 677	264	Deed	41.4776 a.
Michael Adam Sofinowski & wife Carolyn M.	Carroll	Robert Leroy & Margery Lou Poetzman	Montgomery, MD	12-14-1964	CCC 383	158	Deed	84.616 a.
Horatio J. & wife Lettie M. Stermer	Carroll	Michael Adam & wife Carolyn M. Sofinowski	Carroll	7-27-1962	349	155	Deed	86+ a.
Samuel & Melvinah Stermer - wife	Carroll	Horatio J. Stermer	Carroll	11-10-1917	EOC 131	382	Deed	\$3,000 Grantors can have on property for life 86+ a.
Levi Stermer & wife Mandilla & Catherine Sauers, daughter of Jacob Stermer, dec.; Jacob dec. intestate	Carroll	Samuel Stermer (son of Jacob)	Carroll	3-26-1894	BFC 78	536	Deed	also: Lydia & Edward Stuhman of York, PA, grantors \$2,000 Troy & Foreman's Run 86+ a.
George Bowser (made mark)	Carroll	Jacob Stermer	Carroll	3-31-1862	GEW 28	500	Deed	\$3,000 Forman's Run & Troy beings on PA line 145+ a.
John Striewig, Jr. & wife Margaret	Baltimore County	George Bowser	Manheim, York	3-26-1833	TK 230	118	Deed of Indenture	\$1,300 Troy & Foreman's Run begins on PA line 145+ a.
Henry Timanus	Baltimore County	John Striewig, Jr.	Baltimore County	4-19-1828	WG 193	164	Deed of Indenture	\$1,100 Foreman's Run & Troy beings on PA line 145+ a.

GRANTOR	HOME COUNTY	GRANTEE	HOME COUNTY	DATE	LIBER	FOLIO	TRANS ACTION	COMMENTS
Christian Capito (merchant)	Baltimore City	Henry Timanus (yeoman)	Baltimore County	5-12-1827	WG 187	393	Deed of Indenture	Troy 178 a. \$2,000 Nicholas Wyant sold 1 a. to Valentine Foreman, H.T. sells 4 a. to Philip Fuhrman
John Wyant (yeoman)	Baltimore County	Christian Capito (merchant)	Baltimore City	4-30-1821	WG 159	455	Deed of Indenture	\$1,925 Troy 178 a. Nicholas Wyant dec. intestate, 6 heirs sold to John Wyant
Peter Wyant	Baltimore City	John Wyant	Baltimore County	4-14-1818	WG 145	175	Deed of Indenture	Troy - in the North Hundred 1/6th share
Christian Capito & wife Mary Elizabeth (Wyant)	Baltimore City	John Wyant	Baltimore County	4-14-1818	WG 145	174	Deed of Indenture	Troy 1/6th share
Jacob Darvickter & wife Catherine (Wyant)	Miskindom Co, Ohio	John Wyant	Baltimore County	11-14-1816	WG 139	424	Deed of Indenture	Troy 1/6th share
Frederick Wyant		John Wyant			WG 138	555	Deed	Troy 1/6th share
George Olinger & wife		John Wyant			WG 138	553	Deed	Troy 1/6th share
Thomas Rutter, Jr.	Baltimore City	Nicholas Wyant	Baltimore City	8-31-1798	WG 57	212	Deed	Troy 195 a. L 341, set 4-61
Abraham Crumrein	Baltimore County	Thomas Rutter, Jr.	Baltimore County	2-17-1796	WG UU	408	Indenture	L 84 Troy Doesn't give acreage
Thomas Rutter, Jr.		Abraham Crumrein		1-28-1795	WG II?	225	Deed	
Thomas Rutter, Jr.		Abraham Crumrein		2-17-1796	WG UU	408	Indenture	41 a. Troy L 84

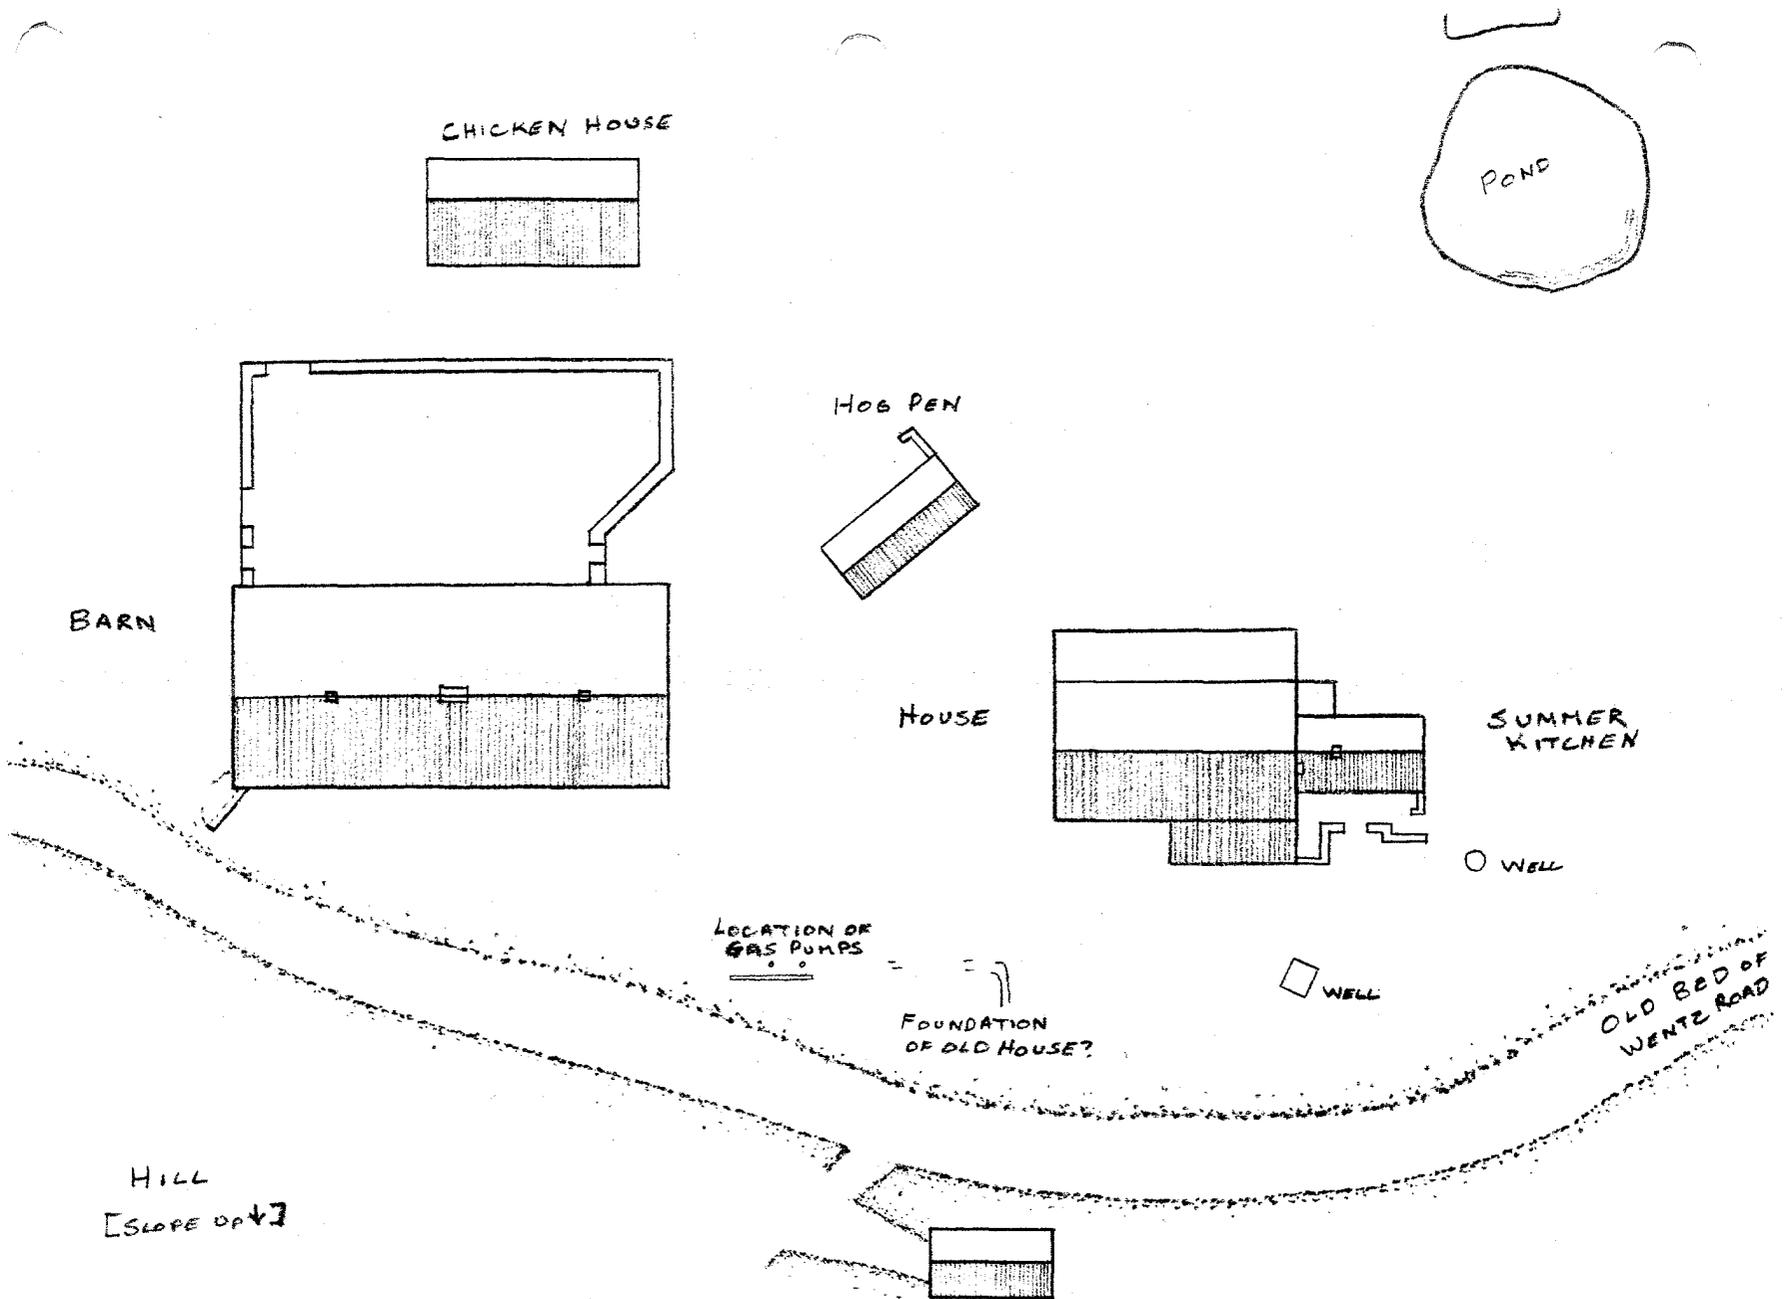


CARR 1299	Jacob Stermer Farm	Site Plan	February 1992	Not to Scale	N ↙
	5225 WENTZ ROAD		Kenneth M Short		



CARR-1299
Jacob Stermer Farm
5225 Wentz Road

Assessments and Taxation Map No. 6

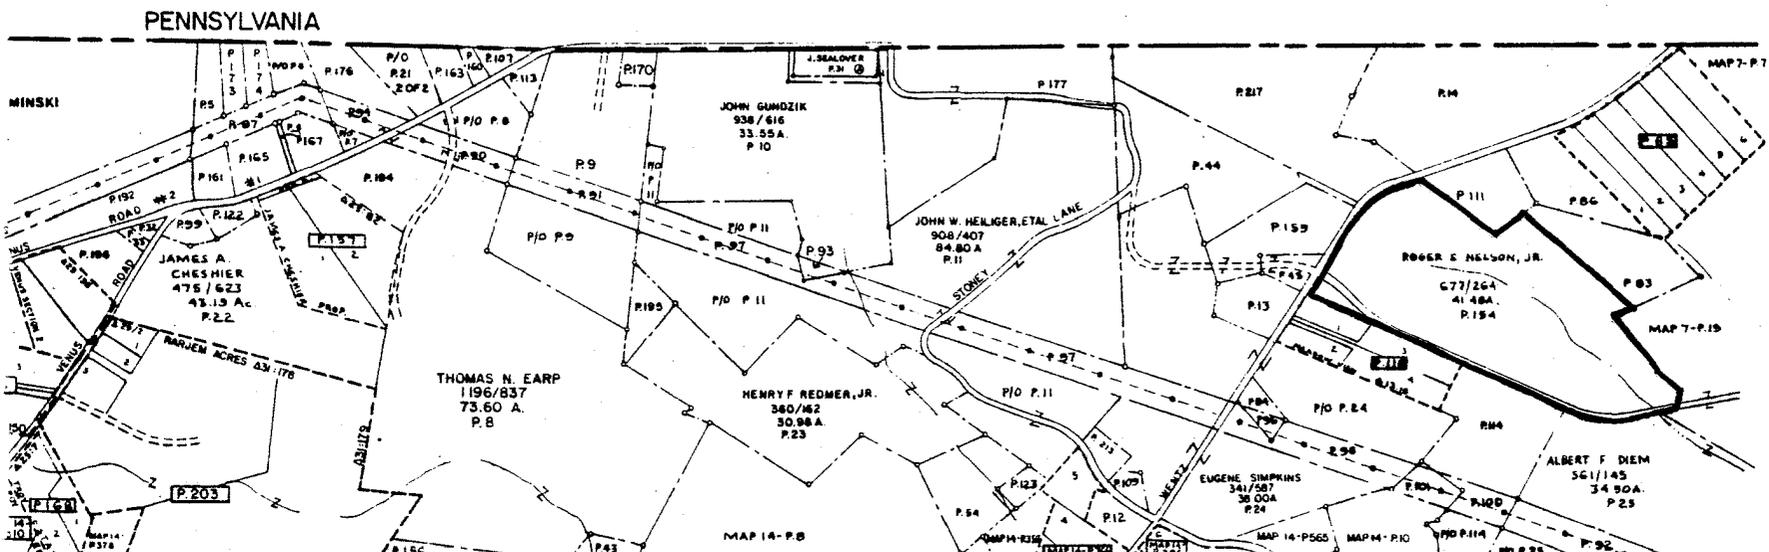


COMPILED BY
DEPT. OF ASSESSMENTS & TAXATION
MAP DIVISION

THE INFORMATION SHOWN HEREON HAS BEEN COMPILED FROM DATA RECEIVED FROM THE FIELD SURVEY. IT SHOULD NOT BE USED FOR LEGAL DESCRIPTIONS UNLESS NOTING ERRORS ARE MADE BY THE FIELD SURVEYOR OR ASSESSMENTS & TAXATION.


PROPERTY LINE
SUB-DIVISION BOUNDARY
CONTINUING OWNERSHIP - Z 1 E - Z 2 1 E - Z 2 2 E - Z 2 3 E - Z 2 4 E - Z 2 5 E - Z 2 6 E - Z 2 7 E - Z 2 8 E - Z 2 9 E - Z 3 0 E - Z 3 1 E - Z 3 2 E - Z 3 3 E - Z 3 4 E - Z 3 5 E - Z 3 6 E - Z 3 7 E - Z 3 8 E - Z 3 9 E - Z 4 0 E - Z 4 1 E - Z 4 2 E - Z 4 3 E - Z 4 4 E - Z 4 5 E - Z 4 6 E - Z 4 7 E - Z 4 8 E - Z 4 9 E - Z 5 0 E - Z 5 1 E - Z 5 2 E - Z 5 3 E - Z 5 4 E - Z 5 5 E - Z 5 6 E - Z 5 7 E - Z 5 8 E - Z 5 9 E - Z 6 0 E - Z 6 1 E - Z 6 2 E - Z 6 3 E - Z 6 4 E - Z 6 5 E - Z 6 6 E - Z 6 7 E - Z 6 8 E - Z 6 9 E - Z 7 0 E - Z 7 1 E - Z 7 2 E - Z 7 3 E - Z 7 4 E - Z 7 5 E - Z 7 6 E - Z 7 7 E - Z 7 8 E - Z 7 9 E - Z 8 0 E - Z 8 1 E - Z 8 2 E - Z 8 3 E - Z 8 4 E - Z 8 5 E - Z 8 6 E - Z 8 7 E - Z 8 8 E - Z 8 9 E - Z 9 0 E - Z 9 1 E - Z 9 2 E - Z 9 3 E - Z 9 4 E - Z 9 5 E - Z 9 6 E - Z 9 7 E - Z 9 8 E - Z 9 9 E - Z 100 E

PARCEL NUMBER - P 349 (ASSIGNED TO IDENTIFY AND INDEX OWNERSHIP. MUST BE PRECEDED BY MAP NUMBER)

SCALE: 1" = 600'

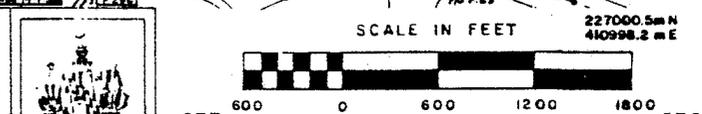


MAP NO. 6

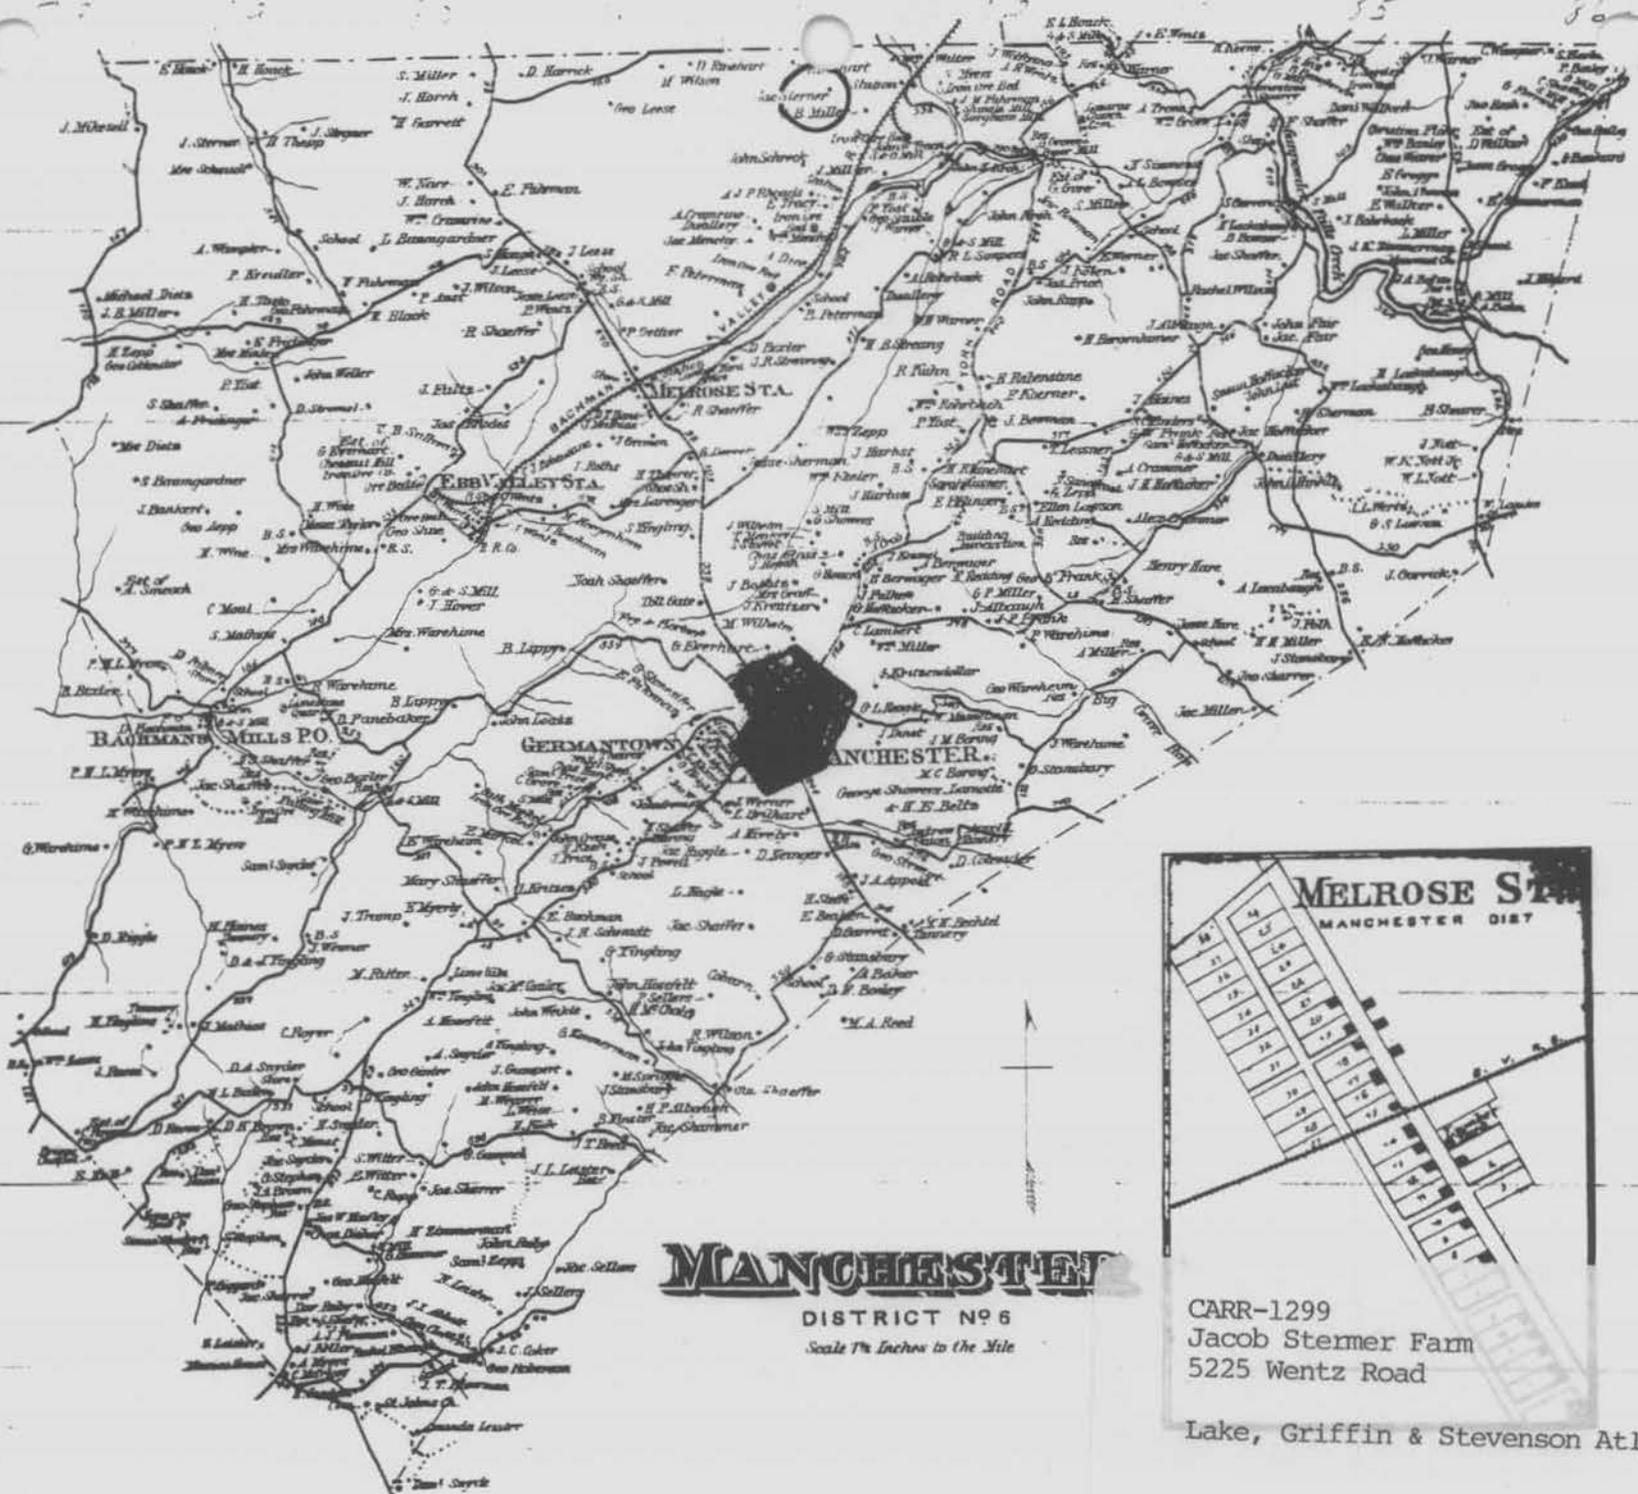


MANCHESTER

DISTRICT NO 6
Scale 1/4 Inch to the Mile

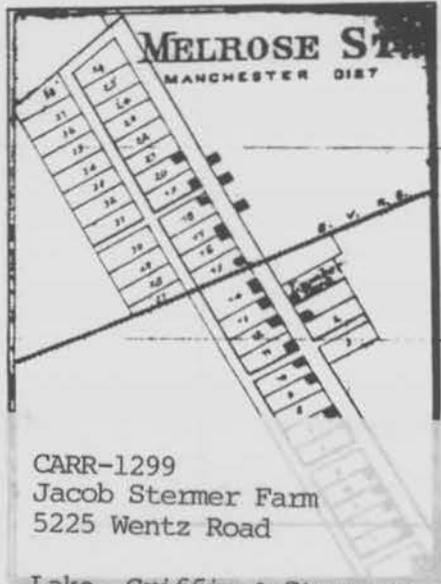

CARR-1299
Jacob Stermer Farm
5225 Wentz Road

Lake, Griffin & Stevenson Atlas, 1877

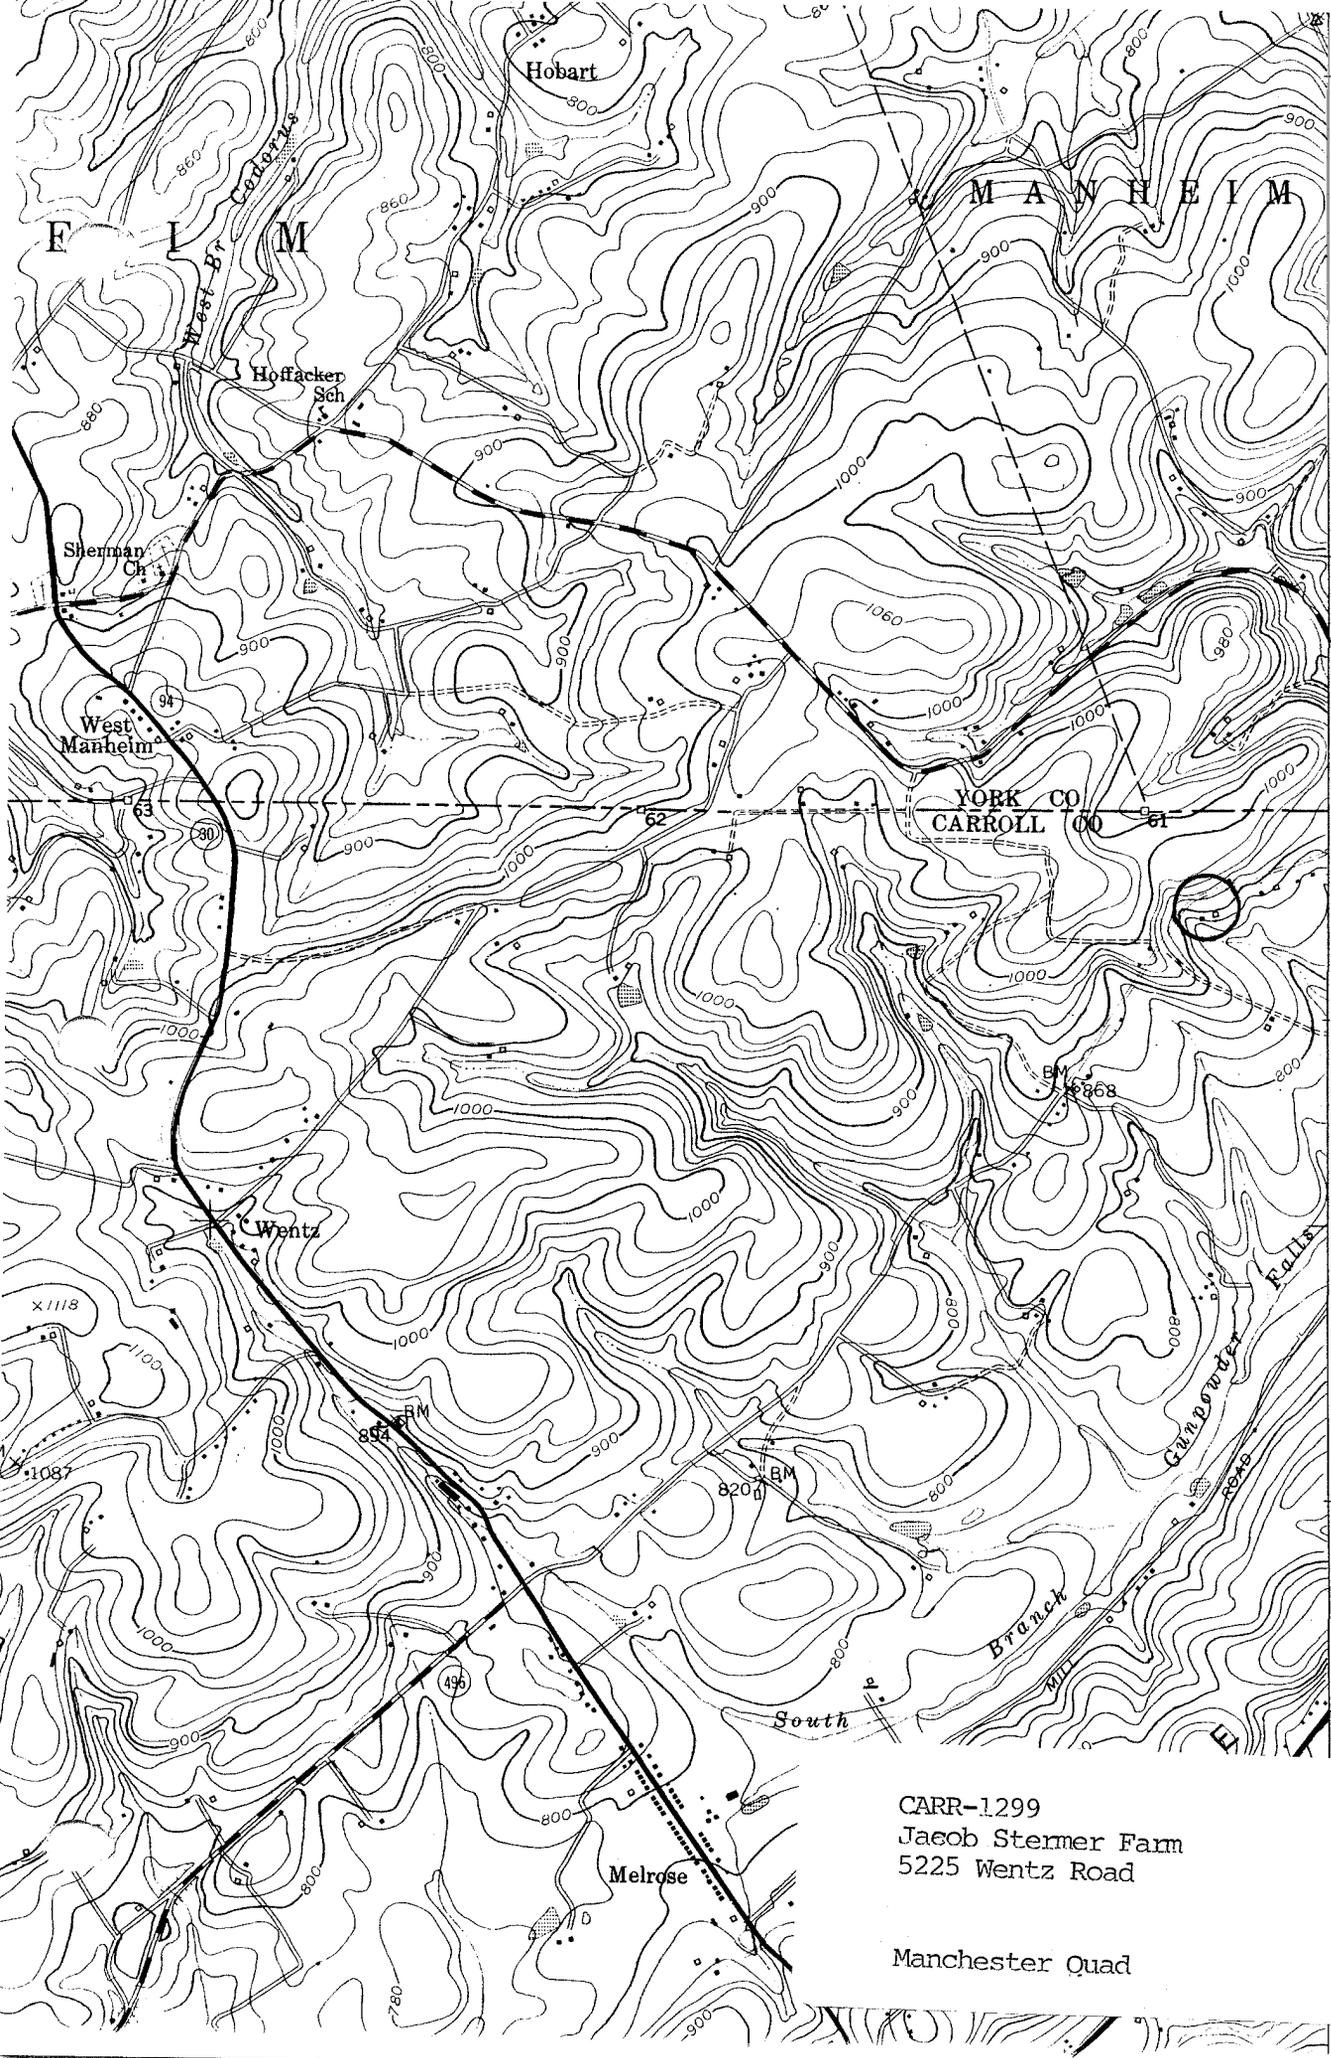

4400

690 000 FEET
(M.D.)

HOKES 2.1 MI.
GLENVILLE 4.3 MI.

4398

4397
42°30'

4396

LINEBORO 2.4 MI.

CARR-1299
Jacob Stermer Farm
5225 Wentz Road

Manchester Quad



Jacob Stermer Farm CARR-1299

5225 Wentz Rd

Carroll County, Maryland

Photo: Kenneth M. Short

Date: February 1992

Neg. Loc: Maryland Historical Trust

Vw. of farm from south

V18



Jacob Stermer Farm CARR-1299

5225 Wentz Rd

Carroll County, Maryland

Photo: Kenneth M. Short

Date: February 1992

Neg. Loc.: Maryland Historical Trust

House & Summer Kitchen - north elev.

2/18



Jacob Stermer Farm CARR-1299

5225 Wentz Rd

Carroll County, Maryland

Photo: Kenneth M. Skort

Date: February 1992

Neg. Loc: Maryland Historical Trust

House & Summer Kitchen - west elev.

3/18



Jacob Stermer Farm CARR-1299

5225 Wentz Rd

Carroll County, Maryland

Photo: Kenneth M. Short

Date: February 1992

Neg. Loc: Maryland Historical Trust

Summer Kitchen & House - west & south elevs

4/18



Jacob Stermer Farm CARR-1299

5225 Wentz Rd

Carroll County, Maryland

Photo: Kenneth M. Short

Date: February 1992

Neg. Loc: Maryland Historical Trust

House - south & east elevs

5/18



Jacob Stermer Farm CARR-1299

5225 Wentz Rd

Carroll County, Maryland

Photo: Kenneth M. Short

Date: February 1992

Neg. Loc: Maryland Historical Trust

Barn- east & north elevs

F/18



Jacob Stermer Farm CARR-1299

5225 Wentz Rd

Carroll County, Maryland

Photo: Kenneth M. Short

Date: February 1992

Neg. Loc.: Maryland Historical Trust

Barn - west & south elevs.

7/18



Jacob Stermer Farm CARR-1299

5225 Wentz Rd.

Carroll County, Maryland

Photo: Kenneth M. Short

Date: February 1992

Neg. Loc.: Maryland Historical Trust

Barn - west elev detail - basement vent

8/18



Jacob Stermer Farm CARR-1299

5225 Wentz Rd

Carroll County, Maryland

Photo: Kenneth M. Short

Date: February 1992

Neg. Loc: Maryland Historical Trust

Barn - south elev. - basement wall

9/18



Jacob Stermer Farm CARR-1299

5225 Wentz Rd

Carroll County, Maryland

Photo: Kenneth M. Short

Date: February 1992

Neg. Loc.: Maryland Historical Trust

Barn-interior, east wall of west log hay mow.

10/18



Jacob Stermer Farm CARR-1299

5225 Wentz Rd

Carroll County, Maryland


Photo: Kenneth M. Short

Date: February 1992

Neg. Loc.: Maryland Historical Trust

Barn - interior, west wall of east log hay mow

11/18

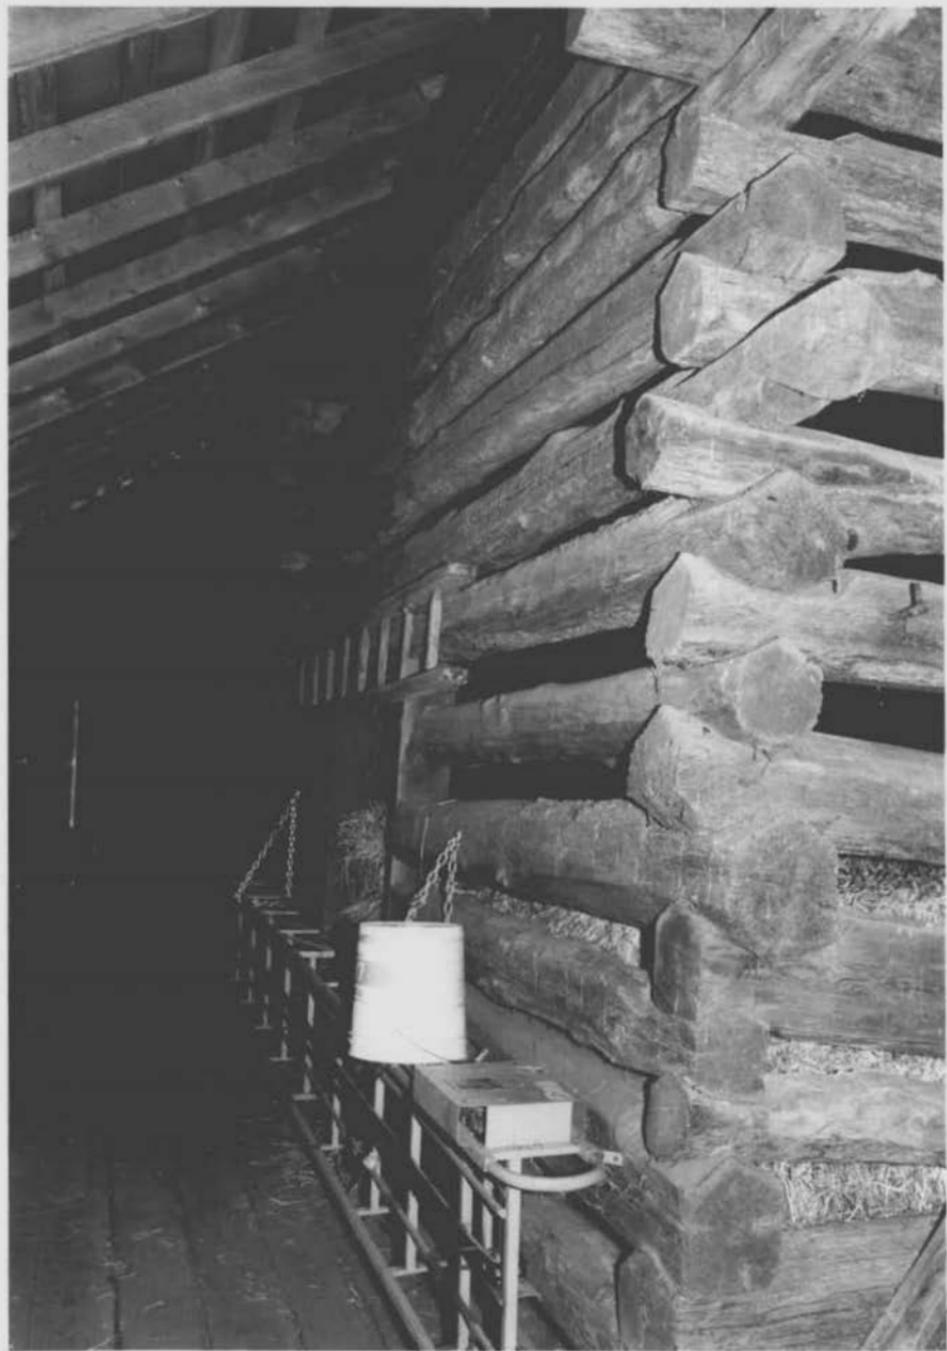

Jacob Stermer Farm CARR-1299

5225 Wentz Rd

Carroll County, Maryland

Photo: Kenneth M. Short

Date: February 1992

Neg. Loc.: Maryland Historical Trust

Barn- interior, south elev. of east log hay mow, from east

12/18



Jacob Stermer Farm CARR-1299

5225 Wentz Rd

Carroll County, Maryland

Photo: Kenneth M. Short

Date: February 1992

Neg. Loc: Maryland Historical Trust

Barn & Poultry House - west & south elevs

13/18



Jacob Stermer Farm CARR-1299

5225 Wentz Rd

Carroll County, Maryland

Photo: Kenneth A Short

Date: February 1992

Neg. Loc.: Maryland Historical Trust

Poultry House - North & west elevs

14/18



Jacob Stermer Farm CARR-1299

5225 Wentz Rd

Carroll County, Maryland

Photo: Kenneth N. Short

Date: February 1992

Neg. Loc: Maryland Historical Trust

Hog Pens: north west & south west elevs

15/18



Jacob Stermer Farm CARR-1299

5225 Wentz Rd

Carroll County, Maryland

Photo: Kenneth M. Short

Date: February 1992

Neg. Loc.: Maryland Historical Trust

Hog Pen - south west & south east elous

16/18



Jacob Stermer Farm CARR-1299

5225 Wentz Rd

Carroll County, Maryland

Photo: Kenneth M. Short

Date: February 1992

Neg. Loc.: Maryland Historical Trust

Hog Pen-interior vw, log section

17/18



Jacob Stermer Farm

CARR-1299

5225 Wentz Rd

Carroll County, Maryland

Photo: Kenneth N. Short

Date: February 1992

Neg. Loc.: Maryland Historical Trust

Wagon Shed - south & east elevs.

18/18