


**United States Department of the Interior
Heritage Conservation and Recreation Service**

**National Register of Historic Places
Inventory—Nomination Form**

See instructions in *How to Complete National Register Forms*
Type all entries—complete applicable sections



1. Name

historic Corbett
and/or common Corbett Historic District (preferred)

2. Location

street & number 1615-1827 Corbett Road & 16200-16225 Corbett Village Lane n/a not for publication
city, town Monkton vicinity of congressional district Second
state Maryland code 24 county Baltimore code 005

3. Classification

Category <input checked="" type="checkbox"/> district <input type="checkbox"/> building(s) <input type="checkbox"/> structure <input type="checkbox"/> site <input type="checkbox"/> object	Ownership <input type="checkbox"/> public <input checked="" type="checkbox"/> private <input type="checkbox"/> both Public Acquisition <input type="checkbox"/> in process <input type="checkbox"/> being considered <input checked="" type="checkbox"/> not applicable	Status <input checked="" type="checkbox"/> occupied <input type="checkbox"/> unoccupied <input type="checkbox"/> work in progress Accessible <input type="checkbox"/> yes: restricted <input checked="" type="checkbox"/> yes: unrestricted <input type="checkbox"/> no	Present Use <input type="checkbox"/> agriculture <input type="checkbox"/> commercial <input type="checkbox"/> educational <input type="checkbox"/> entertainment <input type="checkbox"/> government <input type="checkbox"/> industrial <input type="checkbox"/> military	<input type="checkbox"/> museum <input type="checkbox"/> park <input checked="" type="checkbox"/> private residence <input type="checkbox"/> religious <input type="checkbox"/> scientific <input type="checkbox"/> transportation <input type="checkbox"/> other:
---	--	--	--	--

4. Owner of Property

name See Continuation Sheet No. 1
street & number _____
city, town _____ vicinity of _____ state _____

5. Location of Legal Description

courthouse, registry of deeds, etc. Baltimore County Courthouse
street & number _____
city, town Towson state Maryland 21204

6. Representation in Existing Surveys

title Maryland Historical Trust
Historic Sites Inventory has this property been determined eligible? yes no
date 1985 federal state county local
depository for survey records Maryland Historical Trust, 21 State Circle
city, town Annapolis state Maryland 21401

United States Department of the Interior
National Park Service

National Register of Historic Places
Inventory—Nomination Form

For NPS use only
received
date entered

Corbett Historic District

Continuation sheet Baltimore County, Maryland Item number 4 Page 1

OWNERS OF PROPERTY:

Mr. & Mrs. John Neighbors
1615 Corbett Road
Monkton, MD 21111
472-2605

Rear Adm. Kemp Tolley U.S.N. Ret.
1605 Corbett Village Lane
Monkton, MD 21111
472-2294

Mr. & Mrs. H. Lawrence Kelley
1628 Corbett Road
Monkton, MD 21111
472-2488

Ms. Edith Tor
1607 Corbett Village Lane
Monkton, MD 21111
472-2615

Mr. & Mrs. Edward Gray
1640 Corbett Road
Monkton, MD 21111
472-2592

Mr. & Mrs. Jerry Pfeifer
16209 Corbett Village Lane
Monkton, MD 21111
472-2866

Mr. & Mrs. Paul F. Phillips
1702 Corbett Road
Monkton, MD 21111
472-4094

Mr. & Mrs. Jeremy Altman
16213 Corbett Village Lane
Monkton, MD 21111
771-4646

Mrs. Mary Beall
1717 Corbett Road
Monkton, MD 21111
472-2498

Mr. & Mrs. Henry D. Fuller
16215 Corbett Village Lane
Monkton, MD 21111
472-2510

Mr. & Mrs. Walter Shuppert
1718 Corbett Road
Monkton, MD 21111
472-2538

Mr. & Mrs. Eugene Fink
16217 Corbett Village Lane
Monkton, MD 21111
771-4536

Mr. & Mrs. Michael Ewing
1732 Corbett Road
Monkton, MD 21111
771-4780

Mr. & Mrs. John Macfarlane
16220 Corbett Village Lane
Monkton, MD 21111
472-9380

Mr. & Mrs. C. Bard Cole
1826 Corbett Road
Monkton, MD 21111
472-2468

Mr. & Mrs. C. E. Clemens
16223 Corbett Village Lane
Monkton, MD 21111
472-2684

Mr. & Mrs. Wendell Hartley
1827 Corbett Road
Monkton, MD 21111
472-4216

Mr. & Mrs. Jerry White
16221 Corbett Village Lane
Monkton, MD 21111
771-4487

State of Maryland
Department of Natural Resources
c/o Dr. Torrey Brown, Secretary
Tawes State Office Building
Annapolis, Maryland 21401

7. Description

BA-2260

Condition		Check one	Check one	
<input type="checkbox"/> excellent	<input type="checkbox"/> deteriorated	<input type="checkbox"/> unaltered	<input checked="" type="checkbox"/> original site	
<input checked="" type="checkbox"/> good	<input type="checkbox"/> ruins	<input checked="" type="checkbox"/> altered	<input type="checkbox"/> moved	date <u>n/a</u>
<input type="checkbox"/> fair	<input type="checkbox"/> unexposed			

Describe the present and original (if known) physical appearance

Number of Resources		Number of previously listed National Register properties included in this nomination: <u>0</u>
<u>21</u>	<u>2</u> buildings	
<u>0</u>	<u>0</u> sites	
<u>0</u>	<u>0</u> structures	
<u>0</u>	<u>0</u> objects	
<u>21</u>	<u>2</u> Total	Original and historic functions and uses: <u>agricultural, residential, commercial, transportation industrial</u>

The Corbett Historic District is a group of 20 dwellings, a doctor's office, a former store/post office and a school (the latter two buildings have been converted to residences) comprising the village of Corbett in rural northern Baltimore County, Maryland. Most of the buildings date from c. 1880 through c. 1920, reflecting the period of Corbett's development as a stop on the Northern Central railroad, and a local commercial, industrial, and transportation center for the surrounding farms. Two earlier buildings - a c. 1830 Greek Revival influenced stone farmhouse and its associated tenant house - are located within the community, remnants of the original farm upon which the community was developed following the advent of the railroad. With these two exceptions, the houses in the village are all of frame construction and conform to vernacular or popular types of the period. Most numerous are two-story gable-roofed vernacular "I-houses" three bays wide by one room deep, usually with an ell or shed kitchen at the rear; several of these present a regional variant incorporating a four-bay first-floor facade with entrances in each of two central bays. These houses are generally clad in German siding, and their decorative detailing is confined to turned or scroll-sawn porch trim and occasionally imbricated shingles in the gable peaks. The influence of late 19th century pattern books is apparent in other houses, including two 2½-story gable fronted dwellings (16207 and 16209 Corbett Village Lane). Pivotal structures within the district include the former general store/post office at 1702 Corbett Road, a large six-bay by two-bay building located opposite the site of the 1888 railroad depot (demolished). Also noteworthy are the large homes of the two brothers, a builder and a sawmill operator, whose activities were responsible for much of Corbett's development: 15213 Corbett Village Lane, home of builder Marion Merryman, is a massive Mansard-roofed dwelling with a wraparound porch; Lumberman Robert Merryman constructed an outstanding 3-story Queen Anne house at 1732 Corbett Road, with a wealth of sawn and turned wooden ornament. A large and ornate Colonial Revival house is located at 16205 Corbett Road. Early 20th century structures include a small office constructed by the town's first physician, and a Foursquare house whose prefabricated components were brought in by the convenient railroad. The buildings are clustered along Corbett Road, centering on its intersection with the railroad tracks, and along the town's single side street, Corbett Village Lane (formerly Railroad Avenue), which runs north from Corbett Road paralleling the tracks. Of the 23 major structures within the district, 21, or 91.3% contribute to its significance.

For General Description, see Continuation Sheet No. 2

United States Department of the Interior
National Park Service

**National Register of Historic Places
Inventory—Nomination Form**

For NPS use only
received
date entered

Corbett Historic District

Continuation sheet Baltimore County, Maryland Item number 7 Page 2

GENERAL DESCRIPTION:

1. 1615 Corbett Road: c. 1830 2 story stuccoed stone house, 3 bays wide, 2 rooms deep with ell, gable roof with 2 dormers, Greek Revival detailing.
2. 1615 Corbett Road: c. 1830-1881 2 story tenant duplex, stuccoed stone and brick, 4 bays by 2 bays, shingled gable roof with jigsawn bargeboard and eave decoration.
3. 1628 Corbett Road: 1919 2 story frame Foursquare, German siding, stone foundation, reputedly Sears prefab.
4. 1640 Corbett Road: c. 1888 2 story gable-roofed Germansided frame house, 5 bay by 2 bay, projecting central bay with cross gable, porch with turned posts and curved brackets.
5. 1702 Corbett Road: c. 1884 2 story gable roofed frame store and post office, 6 bay by 2 bay, two front-facing gables, porch with jigsawn brackets and turned balusters, German siding, stone foundation.
6. 16202 Corbett Village Lane: c. 1889 2 story gable-roofed frame house, center gable, 4 bays by 2 bays with shed at rear, german siding, stone foundation.
7. 16220 Corbett Village Lane: 1980 2 story stuccoed concrete block house, gable roof, non-contributing.
8. 16223 Corbett Village Lane: 1890 2 story gable roofed frame house, center gable, 3 bay by 2 bay with sheds at rear, glass-enclosed porch, German siding.
9. 16221 Corbett Village Lane: 1912 2 story gable roofed house, front-facing gable, 3 bays by 2 bays with ell, screened porch, bevel siding.
10. 16217 Corbett Village Lane: c. 1963 2 story gable roofed frame house with shed at rear and 1-story wings, non-contributing.
11. 16215 Corbett Village Lane: c. 1919 2 story gable roofed frame house, 2 bay by 1 bay with ell, German siding, enclosed porch.
12. 16213 Corbett Village Lane: c. 1892-2 story plus mansard, 5 bay by 3 bay, bracketed cornice, wraparound porch with jigsawn balustrade, square posts with scrolled brackets, shallow pediments marking corners.
13. 16209 Corbett Village Lane: c. 1896 gable-fronted frame house, bevel siding with fishscale shingles in gable peak, 3 bay by 2 bay with shed at rear, side-entrance plan.
14. 16207 Corbett Village Lane: c. 1896 2½ story gable-fronted frame house, German siding, semicircular pedimented gable with decorated bargeboards, porch with turned posts and balusters, 3 bay by 2 bay with shed at rear, side entrance plan.

See Continuation Sheet No. 3

United States Department of the Interior
National Park Service

National Register of Historic Places
Inventory—Nomination Form

For NPS use only
received
date entered

Corbett Historic District

Continuation sheet Baltimore County, Maryland Item number

7

Page 3

GENERAL DESCRIPTION (continued)

15. 16205 Corbett Village Lane: c. 1896 Colonial Revival 2 story gable roofed frame house, broad center gable flanked by shed dormers all with 15/15 sash, 5 bay by 2 bay, 9/1 windows, open porch with turned columns and balusters, central entrance with transom and sidelights.
16. 16205 Corbett Village Lane: 2 bay by 2 bay frame doctor's office, built as 1 story c. 1900, later raised to two stories; gable front, German siding.
17. 16203 Corbett Village Lane: c. 1889 2 story gable-roofed dwelling (originally carriage house), 4 bays by 1 bay with extensions to rear.
18. 1706 Corbett Road: c. 1898 2 story gable roofed frame house, cross gable, 3 bay by 1 bay, German siding with scroll-sawn shingles in gable peaks, open porch with square posts, stone foundation.
19. 1717 Corbett Road: 2 story gable roofed frame house, 2 bays by 1 bay with ell, wings to rear and side, enclosed porch, aluminum siding.
20. 1718 Corbett Road: c. 1896 2 story gable roofed frame house, 4 bays by 2 bays, cross gable, open porch with square posts, scroll-sawn brackets, drilled frieze, "Chinese Chippendale" balustrade; stone foundation; aluminum siding, large recent shed and garage attached at rear.
21. 1732 Corbett Road: 1889 outstanding 2½ story frame Queen Anne house, hip-roofed main block with multiple gables and dormers; drilled, scroll-sawn, and turned ornament; fishscale shingles and German siding; Queen Anne sash edged with colored lights; 2 second-story sleeping porches.
22. 1826 Corbett Road: c. 1910 2 story multigabled frame house, German siding, 3-sided bay, porch with turned posts.
23. 1827 Corbett Road: one story hip-roofed frame building, built 1896 as village school, converted to residence in 1910, shingled.

8. Significance

BA-2260

Period	Areas of Significance—Check and justify below			
<input type="checkbox"/> prehistoric	<input type="checkbox"/> archeology-prehistoric	<input type="checkbox"/> community planning	<input type="checkbox"/> landscape architecture	<input type="checkbox"/> religion
<input type="checkbox"/> 1400-1499	<input type="checkbox"/> archeology-historic	<input type="checkbox"/> conservation	<input type="checkbox"/> law	<input type="checkbox"/> science
<input type="checkbox"/> 1500-1599	<input type="checkbox"/> agriculture	<input type="checkbox"/> economics	<input type="checkbox"/> literature	<input type="checkbox"/> sculpture
<input type="checkbox"/> 1600-1699	<input checked="" type="checkbox"/> architecture	<input type="checkbox"/> education	<input type="checkbox"/> military	<input type="checkbox"/> social/
<input type="checkbox"/> 1700-1799	<input type="checkbox"/> art	<input type="checkbox"/> engineering	<input type="checkbox"/> music	<input type="checkbox"/> humanitarian
<input checked="" type="checkbox"/> 1800-1899	<input checked="" type="checkbox"/> commerce	<input type="checkbox"/> exploration/settlement	<input type="checkbox"/> philosophy	<input type="checkbox"/> theater
<input checked="" type="checkbox"/> 1900-	<input type="checkbox"/> communications	<input checked="" type="checkbox"/> industry	<input type="checkbox"/> politics/government	<input checked="" type="checkbox"/> transportation
		<input type="checkbox"/> invention		<input type="checkbox"/> other (specify)

Specific dates c. 1830-c. 1920 **Builder/Architect** various builders

Statement of Significance (in one paragraph)

Applicable Criteria: A, C
Applicable Exceptions: none
Significance Evaluated: local

SIGNIFICANCE SUMMARY:

The Corbett Historic District is locally significant for its association with the growth of small centralized communities in rural Baltimore County as a result of the development of rail transportation in the area into the late 19th century. The district comprises a cohesive group of buildings reflecting the village's importance as a local commercial, industrial, and transportation center around the turn of the 20th century. The frame houses which predominantly characterize the district display Victorian ornament in the form of turned spindles and balusters, scroll-sawn brackets, and imbricated shingles, recalling the importance of the sawmill to the town's early economy. The district retains its turn-of-the-20th-century character, with few insensitive alterations and little recent construction.

BA-2260

United States Department of the Interior
National Park Service

National Register of Historic Places
Inventory—Nomination Form

For NPS use only

received

date entered

Corbett Historic District

Continuation sheet Baltimore County, Maryland Item number

8

Page

4

HISTORY AND SUPPORT:

Corbett's earliest history is documented by a series of land transactions. Cromwell's Park, patented to Joseph Cromwell in 1719, adjoined My Landy's Manor on the southeast. The boundary between this land and 'the manor' was in dispute until it was resurveyed in 1771. Part of Cromwell's Park was leased to Nicholas Merryman. This parcel, known as The Lease, would later become Corbett.

In 1846 William Gywnn bought Cromwell's Park from John Hunter. The stucco-covered stone Greek Revival house (1615 Corbett Road) was standing at this time and was known as the Cromwell's Park house. None of the other houses in the neighborhood existed at this time. Gywnn's daughter, Elinor, carved her name into a pane of glass with a diamond ring and this can still be seen today.

The next owner of note was Isaac Corbett who bought the land in 1864. Corbett immortalized his name when he deeded a small parcel of land to the Northern Central Railroad that same year. This land was to be used as a flag station and the area became known as Corbett's Station. An interesting provision of this deed stated that if trains did not stop for a person of two weeks the land would revert to Corbett, his heirs, or assignees. There must have been some problem between the two parties because in an 1886 newspaper article stated that "the siding had been taken up by the railroad owing to an argument about the right of a strip of land."

In 1881, when Daniel Alder bought the property, Cromwell's Park and another stone house very close by were still the only houses standing in what is now Corbett. The railroad tracks were here, although there was no station and no scheduled stops. The Corbett Road, as we know it did not exist. A road did begin at York Road and followed the present course of Corbett Road east to Matthews Road, but it then followed the course of Matthews Road into Monkton.

It is said that Daniel Alder conceived the idea "of a new road running directly through the station and intersecting York Road at one end and Old York Road at the other." This road was built, complete with a covered bridge over the Gunpowder River that was accepted by County Commissioners in 1883.

Daniel Alder then set out to "build Corbett." First, he erected a large building (1702 Corbett Road) that would be a store, Post Office, and railroad station. This building would also be the home of Methodist Church services and Sunday School. Alder then built a wheelwright and blacksmith shop on his property.

United States Department of the Interior
National Park Service

National Register of Historic Places
Inventory—Nomination Form

For NPS use only
received
date entered

Corbett Historic District

Continuation sheet Baltimore County, Maryland Item number 8 Page 5

HISTORY AND SUPPORT (continued)

In 1885 Robert Merryman, a lumberman and builder from Monkton, bought land and located his sawmill in Corbett. He was attracted to this area because he was able to purchase land very close to the railroad. This sawmill was a two building affair and was powered by a large steam engine. He also built a small, frame tenant house next to the mill. With this local source of lumber, building in Corbett began in earnest.

In 1888 Isaac Prosser, son-in-law of Daniel Alder, had a frame house built somewhere on Alder property. John Miller also built here (1640 Corbett Road), a shoemaker, was the first to buy land from Alder instead of just renting. Miller also built a lean-to on the rear of his house to use as his cobbler shop.

Also in 1888 the Northern Central Railroad built a railroad station and warehouse in Corbett. The station replaced the room that was rented in the store building and the "warehouse" appears to have been a tool shed.

Robert Merryman was also busy in 1888. With his new mill a success, he began to put up the foundation walls for his new residence. This house, at 1732 Corbett Road, would take over two years to complete. Merryman drew plans and constructed the house to be the very finest for its day. His plans would include a large Queen Anne style residence with porches, balconies, an eight foot wide hall, two parlors, five or six bed chambers, large kitchen and a dumbwaiter. Unfortunately, he never lived to see the house completed; he died of pneumonia in 1889. Testimony given in a court case in 1891 indicates that the house had just been completed and that efforts had been made to rent it. These efforts had been unsuccessful, the house had stood empty for two years and expenses were adding up. The Merryman family asked permission of the Orphans Court to sell the property; this was granted and the property sold in 1892 to County Commissioner John V. Slade for \$3,500.00.

1889 marked the year that Daniel Alder built a house "immediately in back of the store" for his son Harry, who was the station agent. Marion Merryman, Robert's brother and a builder by trade, also built a large mansard-roofed home that year. In 1890 two houses were built. Henry Sutzka built his house on a hill in Corbett and Jacob Fisher built his house lower down in the village. Although an exact date cannot be found, it must have been at this time First Avenue came into being. This street would later be called Railroad Avenue and in 1982 the residents changed the name again to Corbett Village Lane.

During the years 1886-1890 several businesses also started in the village. The saw mill and coal yard were in operation, located just across Corbett Road from the end of First Avenue. The store and post office were thriving and John Miller was busy plying his shoemaking trade from his house at 1640 Corbett Road,

United States Department of the Interior
National Park Service

National Register of Historic Places
Inventory—Nomination Form

For NPS use only
received
date entered

Continuation sheet Corbett Historic District
Baltimore County, Maryland Item number 8 Page 6

HISTORY AND SUPPORT (continued)

just across the tracks. The blacksmith and wheelwright shop, under a variety of persons, was expanding and was relocated down into the village proper. The railroad was busy too; shipping milk for area farmers, materials and finished products to and from the mill, and, of course, passengers. In 1890 block stations, or signal towers, were added to the line just south of the #28 bridge.

The young village lost one house and almost lost another in 1892. First, Isaac Prosser's house burned to the ground. His tenant was able to save the furniture. Shortly after that, disaster struck again when lightning struck the home of John Miller. The lightning knocked off shingles, plaster, and exited out the stove. The Miller family made their escape by exiting through the cobbler shop and the house was saved.

Despite these setbacks growth still continued at a fast pace. John Slade, who had just bought the store, built a warehouse just south of the station and also a stable near the store. He also added to the store building, painted it and readied it for opening. Marion Merryman also built two more houses on his property here. Marion was now owner of the mill having bought it from his brother's estate. Daniel Alder also had four more houses built in the village.

The 1896 tax list provides a clear picture of Corbett that year:

- John Stutzka - 1 house
- John Miller - 1 house
 - 1 chicken house
- John Slade - 1 frame store/dwelling
 - combined stable/coal house
 - building and warehouse
 - dwelling and outbuildings
- Marion Merryman - 3 houses
 - 1 office
- Daniel Alder - 6 houses
 - blacksmith shop
 - 3 barns
 - corn house
 - barrack
- Ida Merryman - sawmill
 - tenant house

The following people were listed as owning personal property only and no real estate.

See Continuation Sheet No. 7

United States Department of the Interior
National Park Service

National Register of Historic Places
Inventory—Nomination Form

Corbett Historic District

Continuation sheet Baltimore County, Maryland

Item number

8

Page

7

For NPS use only

received

date entered

HISTORY AND SUPPORT (continued)

D. R. Allen - Surveyor
Harry Merryman
J. V. Storms
George Alder
Harry Alder
Oliver Peregoy - storekeeper

Also in 1896 a new village school was built to replace the quarters that were rented in the store. This two-room school was built by Marion Merryman. The front room was used for the public school and the room in the rear was used for Methodist Church services and Sunday School. This building almost did not see completion. On a Wednesday night, when the building was almost finished, persons unknown poured coal oil on wood shavings around the foundation and set it ablaze. Mrs. Charles Alder saw the fire, the neighborhood was aroused and the fire was put out.

Newspaper accounts also tell us of the human side of Corbett. Romances, illness, accidents at the mill, and poor conditions of the roads are all recounted. The story of a murder is reported in an 1887 story about Corbett. Apparently a scuffle broke out at the blacksmith shop. It continued as the participants went behind a barrack barn. There one stabbed the other. The newspaper speaks of a trial but does not report the outcome of it.

In the early 1900s Dr. Josiah Payne and his son, T. Ross Payne, moved to Corbett and began to practice medicine. The Doctors Payne, one of whom lived at the corner of Corbett Village Lane and Corbett Road and the other in a large house just east of Corbett Village Lane, used a small building at 16205 Corbett Village Lane for their office. A stable was built between their office and home for the horse and carriage. One of the earliest telephone systems in this area linked the doctors to the Monkton Hotel. Dr. T. Ross Payne eventually raised the office to two stories, his yardman lived on the second floor. A subsequent owner converted the stable to a residence although it shares its well and septic system with the house next door.

Although building did not continue at as furious a pace, several more houses were built during the 1900s. Josiah Sheppard built a house for his married daughter, Mrs. Harry Elliot, on the property next to the house he had bought from Stutzka. This Harry Elliot then had a house built at the end of a new road called Second Avenue. This street, providing access to this house only, was built as a public road. Since that time it has become a private driveway. The house at the end of Second Avenue (16205 Corbett Village Lane) stood unpainted for about 20 years. It also had no well; water came from the house up the hill.

United States Department of the Interior
National Park Service

National Register of Historic Places
Inventory—Nomination Form

For NPS use only

received

date entered

Corbett Historic District

Continuation sheet Baltimore County, Maryland

Item number

8 and 10 Page 8

HISTORY AND SUPPORT (continued)

Around 1910 Edward Merryman bought land and built his house (1826 Corbett Road) on the hill above the village school. Robert Merryman, son of the man who started the mill, built a home in Corbett just after the turn of the century. In 1919 the Keys family had a prefabricated house brought in by railroad and assembled it just across Corbett Road from the Cromwell Park House.

Despite these signs of growth, Corbett was beginning to show signs of decline. Around 1900 the saw mill closed. The small tenant house on the mill lot fell into disrepair and was demolished. In the 1930s the farm machinery shop closed. Also in the 1930s the Tolley family bought the house that Jacob Fisher built and had it demolished.

Although all other commercial enterprises had closed Corbett maintained its identity through the store, Post Office and railroad station. Another blow came on December 31, 1944 when the Post Office was closed and all mail was postmarked "Monkton."

The 1950-1980 period has brought more changes to Corbett. Local train service was halted and the station demolished. In 1971 all trains stopped running on the line due to flood damage. In 1984 the Northern Central right-of-way became a bike/hike trail. Two house were added to the village in this period and a barn has been converted to a duplex apartment.

In spite of all of the changes that have occurred, Corbett has retained its Victorian charm through its architecture, stately trees and quiet pace.

10. GEOGRAPHICAL DATA:

Verbal Boundary Description and justification:

The boundaries of the Corbett Historic District are indicated on the attached map, and were drawn to encompass the tight cluster of resources which contribute to the significance of the district while excluding the surrounding open farmland and forest. Boundaries utilize existing property lines as lines of convenience; these lines, however, correspond closely to changes in topography and land use. The Gunpowder Falls defines the southeastern boundary of the district; woodland lies to the southwest, east and north; rolling farmland extends to the west.

9. Major Bibliographical Reference

BA-2260

Clemens, S.B. and C.E. Clemens, From Marble Hill to Maryland Line (n.p.: Authors, rev. ed. 1983).

Brooks, Neal A. and Eric G. Rockel, A History of Baltimore County (Towson, MD: Friends of the Towson Library, 1980).

10. Geographical Data

Acreeage of nominated property approximately 72 acres

Quadrangle name Phoenix, MD

Quadrangle scale 1:24000

UMT References

A	1 8	3 6 1 3 8 0	4 3 8 1 2 4 0
	Zone	Easting	Northing

B	1 8	3 6 1 6 2 0	4 3 8 0 8 0 0
	Zone	Easting	Northing

C	1 8	3 6 0 9 7 0	4 3 8 0 7 0 0
---	-----	-------------	---------------

D	1 8	3 6 0 5 1 0	4 3 8 0 8 6 0
---	-----	-------------	---------------

E	1 8	3 6 0 7 0 0	4 3 8 1 1 9 0
---	-----	-------------	---------------

F			
---	--	--	--

G			
---	--	--	--

H			
---	--	--	--

Verbal boundary description and justification

See Continuation Sheet No. 8

List all states and counties for properties overlapping state or county boundaries

state	code	county	code
n/a			
state	code	county	code

11. Form Prepared By

name/title Andrew C. Clemens

organization _____ date 31 March 1985

street & number 16202 Corbett Village Lane telephone 301-472-4365

city or town Monkton state Maryland 21111

12. State Historic Preservation Officer Certification

The evaluated significance of this property within the state is:

national state local

As the designated State Historic Preservation Officer for the National Historic Preservation Act of 1966 (Public Law 89-665), I hereby nominate this property for inclusion in the National Register and certify that it has been evaluated according to the criteria and procedures set forth by the Heritage Conservation and Recreation Service.

State Historic Preservation Officer signature

Michael J. 8-9-85

title STATE HISTORIC PRESERVATION OFFICER date _____

For HCRS use only

I hereby certify that this property is included in the National Register

date _____

Keeper of the National Register

Attest:


date _____


Chief of Registration

KEY TO MAP CORBETT HISTORIC DISTRICT

- BA-2260
1. 1615 Corbett Road
 2. 1616 Corbett Road
 3. 1628 Corbett Road
 4. 1640 Corbett Road
 5. 1702 Corbett Road
 6. 16202 Corbett Village Lane
 7. 16220 Corbett Village Lane (non-contributing)
 8. 16223 Corbett Village Lane
 9. 16221 Corbett Village Lane
 10. 16217 Corbett Village Lane (non-contributing)
 11. 16215 Corbett Village Lane
 12. 16213 Corbett Village Lane
 13. 16209 Corbett Village Lane
 14. 16207 Corbett Village Lane
 15. 16205 Corbett Village Lane
 16. 16205 Corbett Village Lane
 17. 16203 Corbett Village Lane
 18. 1706 Corbett Road
 19. 1717 Corbett Road
 20. 1718 Corbett Road
 21. 1732 Corbett Road
 22. 1826 Corbett Road
 23. 1877 Corbett Road


Note: Stippling indicates area included within National Register boundaries. All resources contribute to the significance of the district except 16217 and 16220 Corbett Village Lane (as noted). Circled numerals correspond to attached photographs.

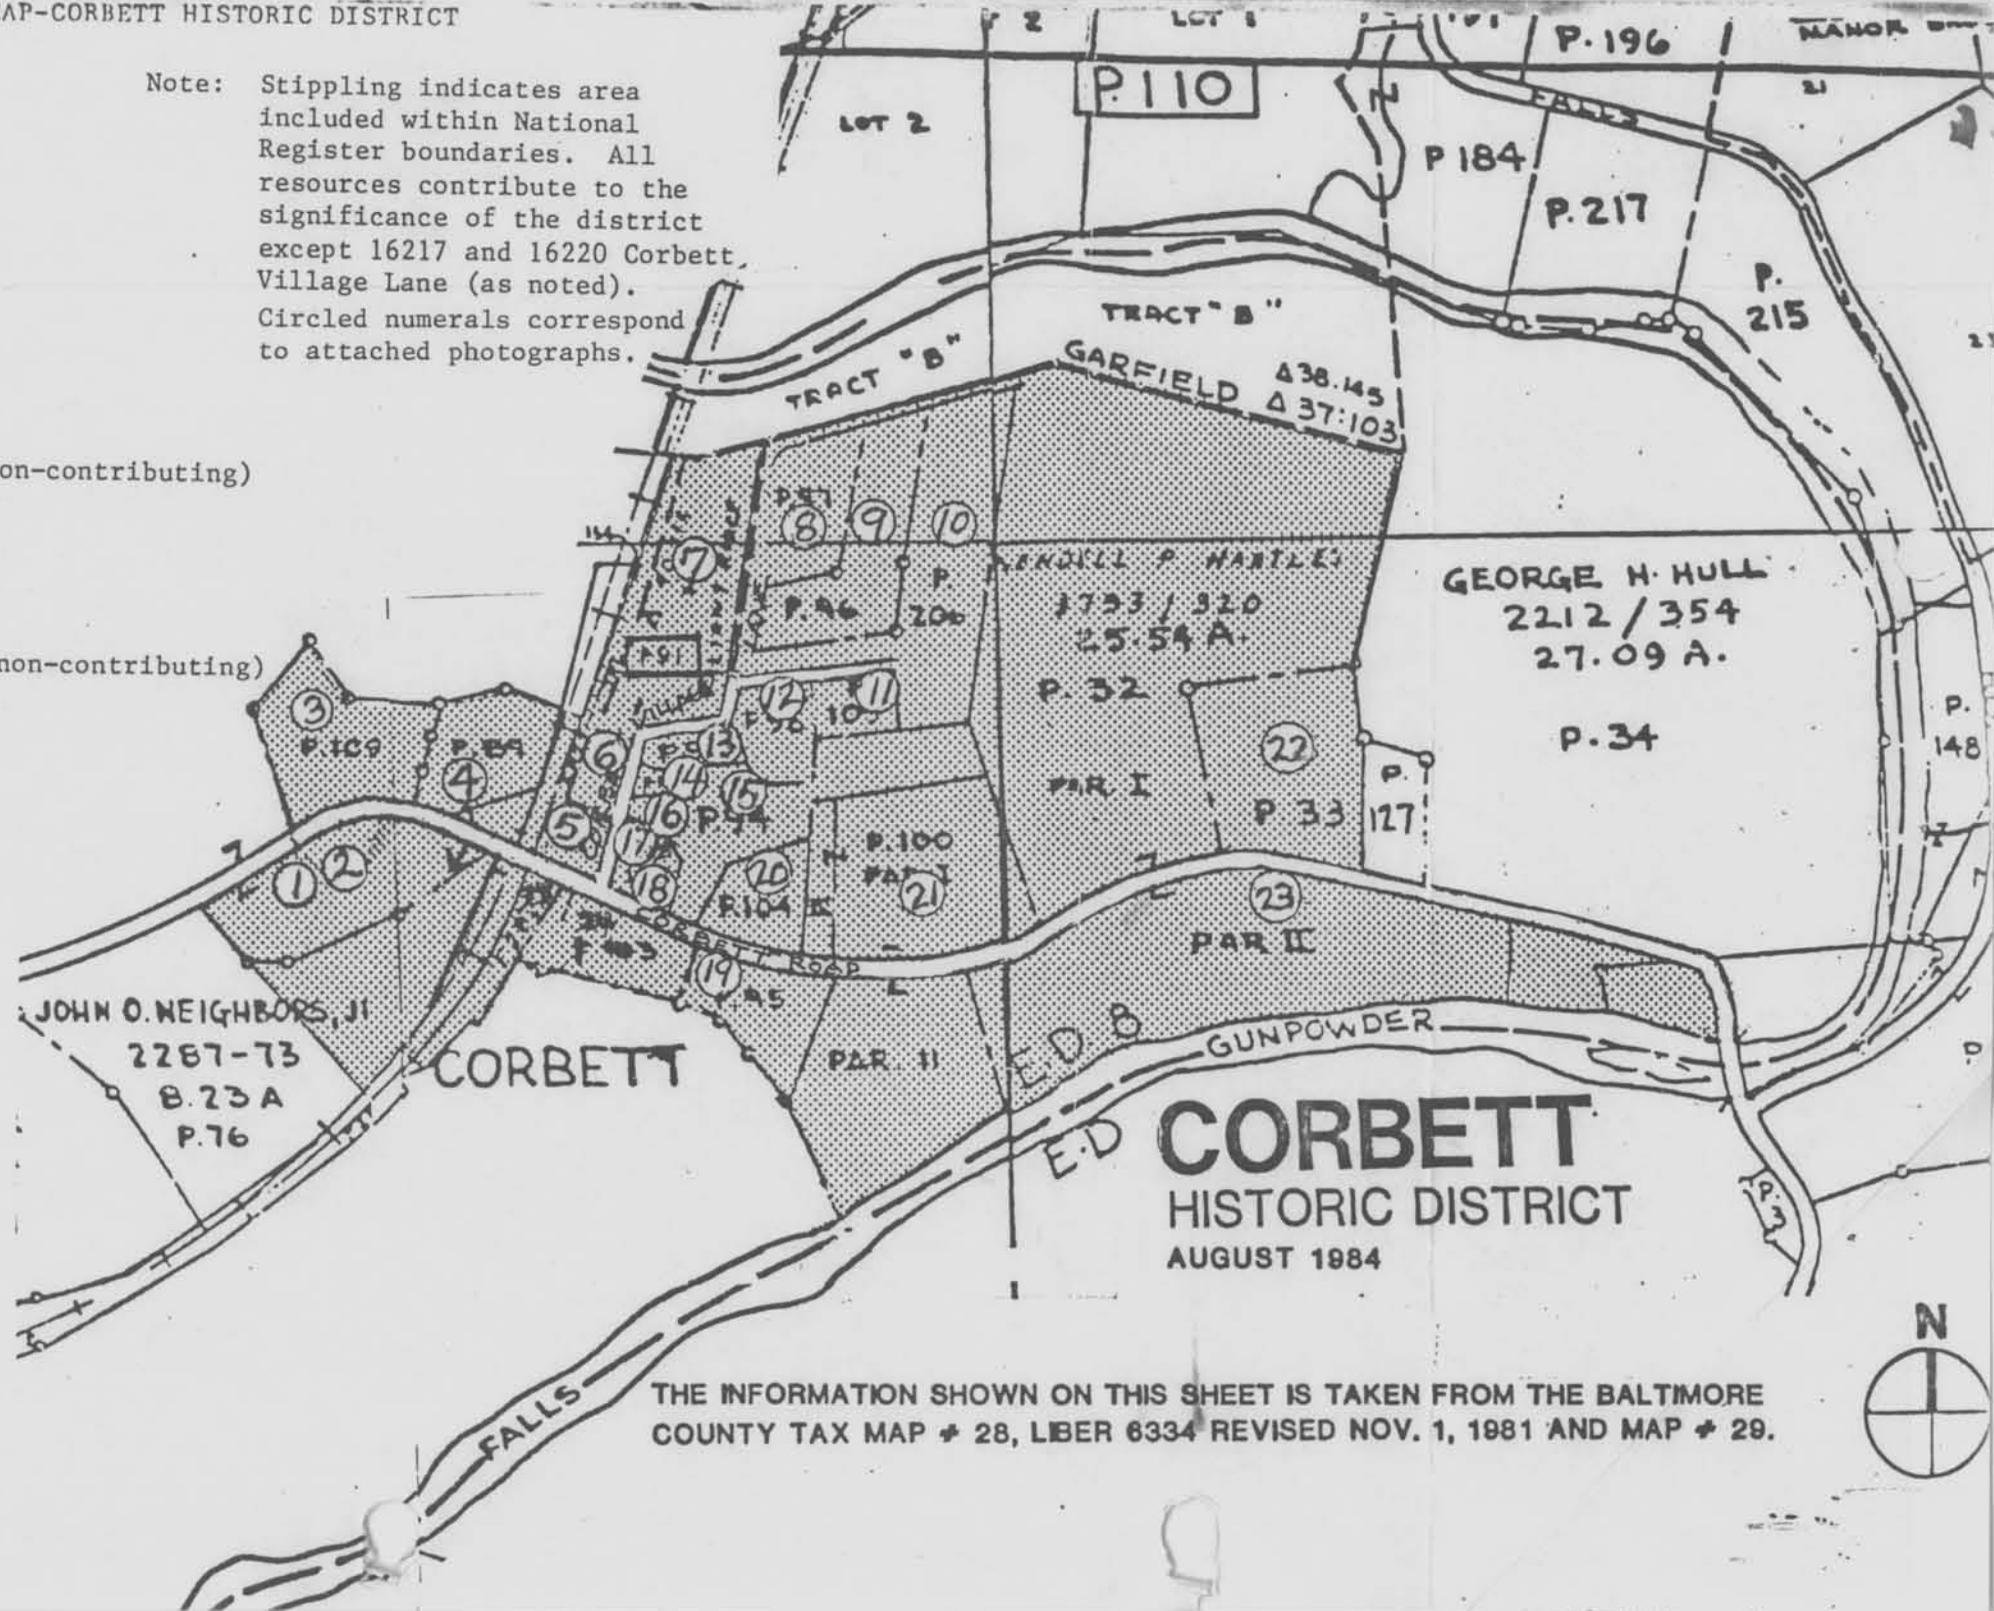

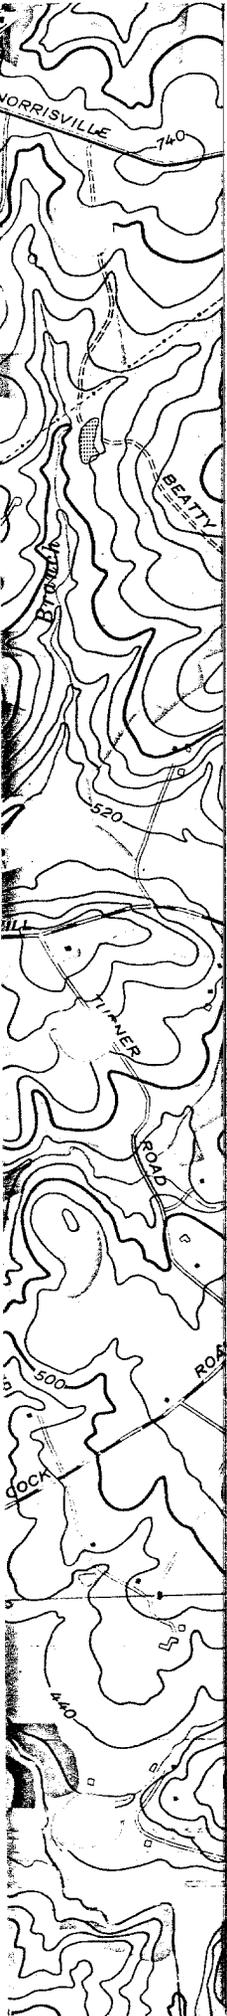

BA-2260
 CORBETT
 HISTORIC
 DISTRICT
 BALTIMORE COUNTY
 MARYLAND

- A: 18-361380-4381240
- B: 18-361620-4380800
- C: 18-360970-4380700
- D: 18-360510-4380860
- E: 18-360700-4381190

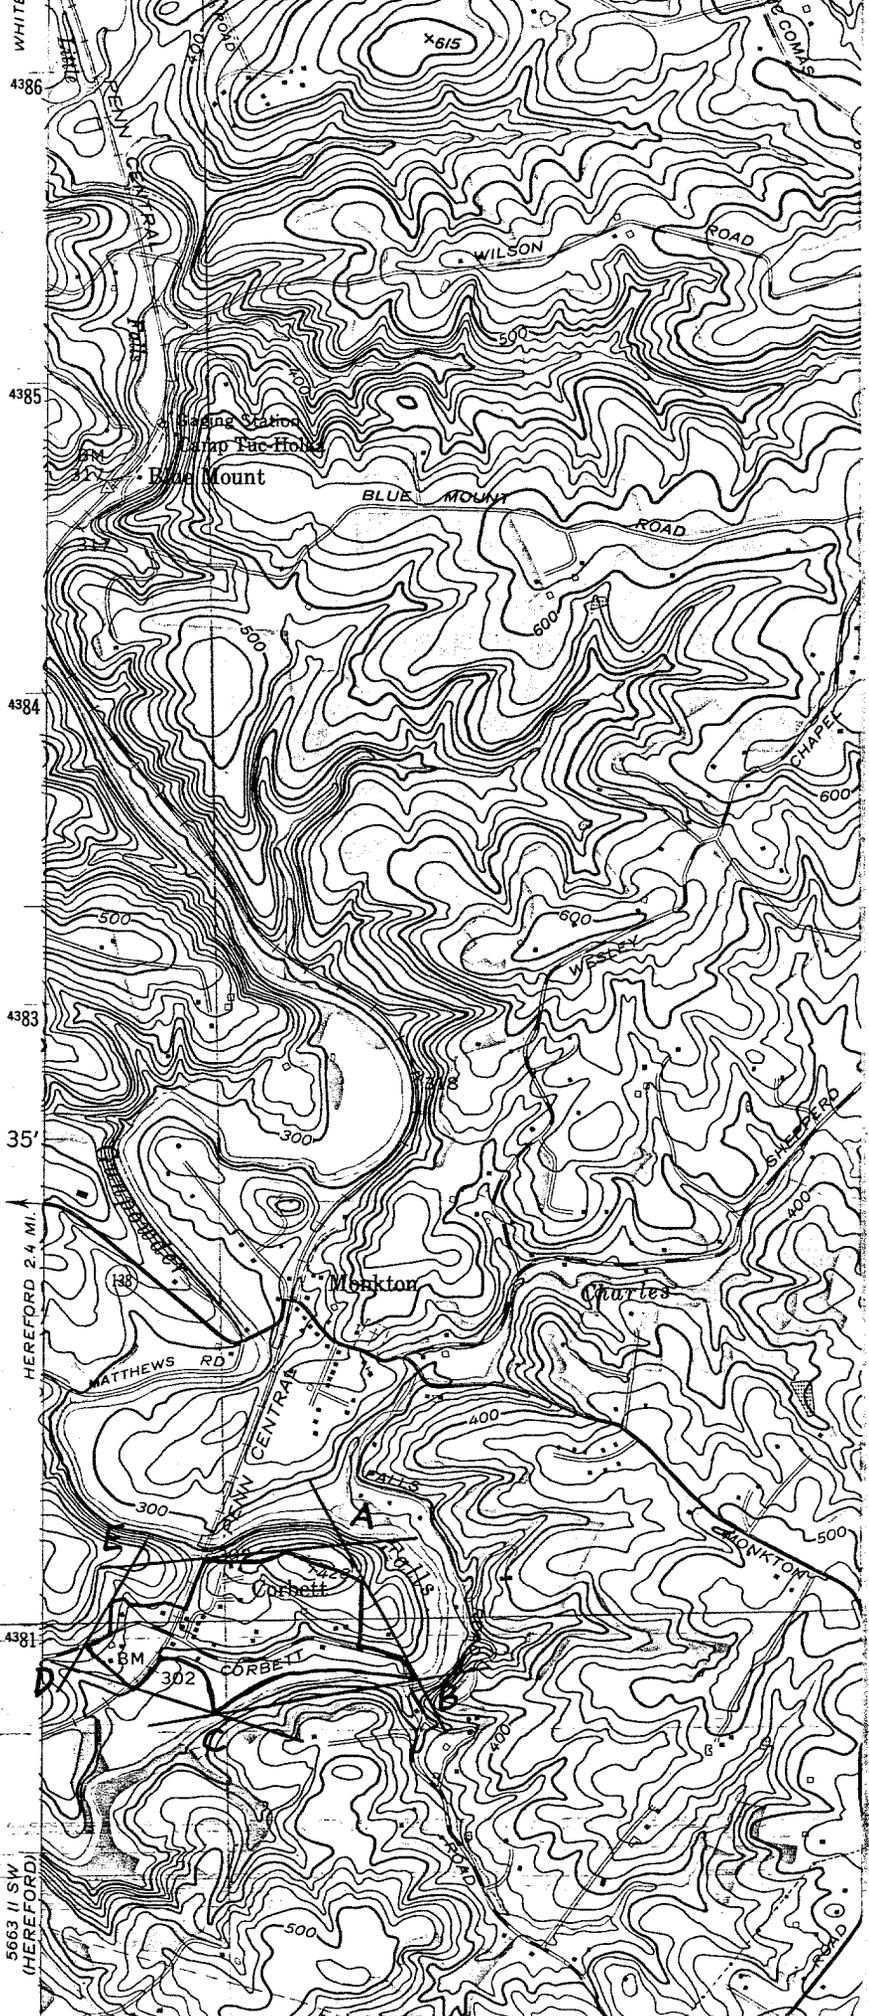

5663 (1/4 SW)
 (HEREFORD)



1. Corbett Historic District
2. Baltimore County, Md.
3. Andy Clemens BA-2260
4. 2/85

- 5 Md. Historical Trust Annapolis, Md.
6. 1615 Corbett Road - SE elevation
7. 1/26



1. Corbett Historic District
2. Balto. County, Md
3. Andy Clemens BA-2260
4. 2/85
5. Md Historic Trust Annapolis Md.
6. 1615 Corbett Rd (ruin)
NW elevation
7. 2/28



1. Corbett Historic District
2. Balto. County, Md.
3. Andy Clemens BA-2260
4. 2/85
5. Md. Historic Trust Annapolis Md.
6. 1628 Corbett Rd. SE election
7. 3/20



1. Corbett Historic District
 2. Balto. County Md.
 3. Andy Clemens
 4. 2/85 BA-2260
-
5. Md. Historic Trust Annapolis, Md.
 6. 1640 Corbett Rd SW elevations
 7. 4/26



BA-2260

1. Corbett Historic District
2. Balto County, Md.
3. Andy Clemens
4. 2/85
5. Md. Historic Trust Annapolis md
6. 1702 Corbett Road
SE elevation
7. 5/26



1. Corbett Historic District
2. Balto. County, Md.
3. Andy Clemens
4. 2/85
5. Md. Historic Trust Annapolis md
6. 16202 Corbett Village La
SE elevation
7. 6/26



BA-2260

1. Corbett Historic District
2. Balto County, Md.
3. Andy Clemens
4. 2/85
5. Md. Historic Trust Annapolis Md
6. 16220 Corbett Village La
SE elevation
7. 7/28



1. Corbett Historic District
 2. Balto County, Md.
 3. Andy Clemens
 4. 2/85
-
5. Md. Historic Trust Annapolis, Md.
 6. 16223 Corbett Village La.
SE elevation
 7. 8/26



BA-2260

1. Corbett Historic District
2. Balto County, Md
3. Andy Clemens
4. 2/85
5. Md. Historic Trust Annapolis Md.
6. 1622.1 Corbett Village La
sw elevation
7. 9/26



BA-2260

1. Corbett Historic District
 2. Balto County, Md.
 3. Andy Clemens
 4. 2/85
-
5. Md Historic Trust Annapolis, Md
 6. 16217 Corbett Village La
SW elevation
 7. 10/25



1. Corbett Historic District
 2. Balto. County, Md.
 3. Andy Clemens
 4. 2/85
5. Md Historic Trust Annapolis Md
 6. 16215 Corbett Village La
NW elevation
 7. 11/26



BA-2260

1. Corbett Historic District
 2. Balto County, Md
 3. Andy Clemens
 4. 2/85
5. Md. Historic Trust Annapolis, Md.
 6. 16213 Corbett Village La
SW elevation
 7. 12/26



BA-2260

1. Corbett Historic District
2. Balto. County, Md.
3. Andy Clemens
- 4 2/85

5. Md Historic Trust Annapolis, Md.
- 6 16209 Corbett Village La
SW elevations
- 7 13/26



1. Corbett Historic District
2. Balto County, Md
3. Andy Clemens
4. 2/85
5. Md. Historic Trust Annapolis, Md
6. 16207 Corbett Village La
SW elevation
7. 14/26



BA-2260

1. Corbett Historic District
2. Balto. County, Md.
3. Andy Clemens
4. 2/85
5. Md. Historic Trust Annapolis Md.
6. 16205 Corbett Village Ln
SW elevation
7. 15/28



1. Corbett Historic District
2. Balto. County, Md.
3. Andy Clemens
4. 2/85
5. Md Historic Trust Annapolis Md
6. 16205 Corbett Village La.
SW elevation
7. 16/26



BA-2260

1. Corbett Historic District
2. Balto. County, Md.
3. Andy Clemens
4. 2/85
5. Md Historic Trust Annapolis Md.
6. 16203 Corbett Village La
SW elevation
7. 17/26



SLOW
CHILDREN
AT PLAY

BA-2260

1. Corbett Historic District
2. Balto County, Md
3. Andy Clemens
4. 2/85

5. Md Historic Trust Annapolis Md.
6. 16201 Corbett Village La
SW elevation
7. 18/26



BA-2260

1. Corbett Historic District
2. Balto County, Md.
3. Andy Clemens
4. 2/85
5. Md. Historic Trust Annapolis Md.
6. 1717 Corbett Rd
NE elevation
7. 19/26



1. Corbett Historic District
2. Balto. County Md
3. Andy Clemens
4. 2/85

5. Md. Historic Trust Annapolis Md.
6. 1718 Corbett Rd
SW elevation
7. 2d/26



1. Corbett Historic District
2. Balto County Md.
3. Andy Clemens
4. 2/85
5. Md Historic Trust Annapolis Md
6. 1732 Corbett Rd. NW elevation
7. 21/26 BA-2260



BA-2260

1. Corbett Historic District
2. Balto County Md.
3. Andy Clemens
4. 2/85

5. Md Historic Trust Annapolis Md
6. 1826 Corbett Road NW elevation
7. 22/26



1. Corbett Historic District
2. Balto County Md BA-2260
3. Andy Clemens
4. 2/85
5. Md. Historic Trust Annapolis Md
6. 1827 Corbett Rd
7. 23/26



1. Corbett Historic District
2. Balto County Md. BA-2260
3. Andy Clemens
4. 2/85
5. Md Historic Trust Annapolis Md.
6. Street Scene. View of Corbett Village Lane - Looking north from Corbett Rd.
7. 24/26



1. Corbett Historic District
2. Balto County, Md. BA-2260
3. Andy Clemens
4. 2/85

5. Md Historic Trust Annapolis Md.
6. Street scene - Rear of houses on
Corbett Village Lane Looking NW
7. 25/26



1. Corbett Historic District
2. Balto County Md
3. Andy Clemens BA-2260
4. 2/85

5. Md. Historic Trust Annapolis Md.
6. Street Scene - View of Corbett Village Lane from 16221 CVL Looking SW
7. 26/26



BA-2260

1. Corbett Historic District
2. Balto. County, Md
3. Andy Clemens Copy neg + print
4. Ca 1910
5. Andrew Clemens. Monkton Md
- 6 1826 Corbett Rd
S W elevation