

**United States Department of the Interior  
National Park Service**

PG:84-20

For NPS use only

**National Register of Historic Places  
Inventory—Nomination Form**

received

date entered

See instructions in *How to Complete National Register Forms*  
Type all entries—complete applicable sections

**1. Name**

historic Bellevue

and or common Bellevue

**2. Location**

street & number 200 Manning Road East N/A not for publication

city, town Accokeek N/A vicinity of Fifth Congressional District

state Maryland code 024 county Prince George's code 033

**3. Classification**

Category	Ownership	Status	Present Use
<input type="checkbox"/> district	<input type="checkbox"/> public	<input checked="" type="checkbox"/> occupied	<input type="checkbox"/> agriculture
<input checked="" type="checkbox"/> building(s)	<input checked="" type="checkbox"/> private	<input type="checkbox"/> unoccupied	<input type="checkbox"/> commercial
<input type="checkbox"/> structure	<input type="checkbox"/> both	<input type="checkbox"/> work in progress	<input type="checkbox"/> educational
<input type="checkbox"/> site	<b>Public Acquisition</b>	<b>Accessible</b>	<input type="checkbox"/> entertainment
<input type="checkbox"/> object	<input type="checkbox"/> in process	<input type="checkbox"/> yes: restricted	<input type="checkbox"/> government
	<input type="checkbox"/> being considered	<input type="checkbox"/> yes: unrestricted	<input type="checkbox"/> industrial
	<input checked="" type="checkbox"/> not applicable	<input checked="" type="checkbox"/> no	<input type="checkbox"/> military
			<input type="checkbox"/> museum
			<input type="checkbox"/> park
			<input checked="" type="checkbox"/> private residence
			<input type="checkbox"/> religious
			<input type="checkbox"/> scientific
			<input type="checkbox"/> transportation
			<input type="checkbox"/> other:

**4. Owner of Property**

name Mr. and Mrs. Daniel Deming (Madeleine H.)

street & number P. O. Box 103

city, town Accokeek N/A vicinity of state Maryland 20607

**5. Location of Legal Description**

courthouse, registry of deeds, etc. Prince George's County Courthouse

street & number Main Street

city, town Upper Marlboro state Maryland 20772

**6. Representation in Existing Surveys**

title Maryland Historical Trust  
Historic Sites Inventory has this property been determined eligible?  yes  no

date 1974  federal  state  county  local

depository for survey records Maryland Historical Trust, 21 State Circle

city, town Annapolis state Maryland 21401

# 7. Description

<b>Condition</b>		<b>Check one</b>	<b>Check one</b>
<input checked="" type="checkbox"/> excellent	<input type="checkbox"/> deteriorated	<input type="checkbox"/> unaltered	<input checked="" type="checkbox"/> original site
<input type="checkbox"/> good	<input type="checkbox"/> ruins	<input checked="" type="checkbox"/> altered	<input type="checkbox"/> moved date <u>      </u>
<input type="checkbox"/> fair	<input type="checkbox"/> unexposed		<u>      </u> N/A

**Describe the present and original (if known) physical appearance**

Number of Resources		Number of previously listed National Register properties included in this nomination: <u>  0  </u>
Contributing	Noncontributing	
<u>  1  </u>	<u>  1  </u> buildings	Original and historic functions and uses: residential
<u>  0  </u>	<u>  0  </u> sites	
<u>  0  </u>	<u>  1  </u> structures	
<u>  0  </u>	<u>  0  </u> objects	
<u>  1  </u>	<u>  2  </u> Total	

**DESCRIPTION SUMMARY:**

Bellevue is a gable-roofed frame side-hall-and-double-parlor-plan plantation house of the second quarter of the nineteenth century. It consists of a two-and-one-half-story main block with two freestanding brick chimneys and pent, partially enclosed by a one-and-one-half-story kitchen wing; interior details are in the Greek Revival style. The house stands in a rural area east of Accokeek in southern Prince George's County, Maryland. Directly south of the house is a small 1930s outbuilding with horizontal board siding with an extended wooden-shingled gable roof. A partially open wood shed structure built in 1979 stands to the southeast.

For General Description, see Continuation Sheet No. 1

United States Department of the Interior  
National Park Service

**National Register of Historic Places  
Inventory—Nomination Form**

For NPS use only  
received  
date entered

Bellevue  
Continuation sheet Prince George's County, MD Item number 7 Page 1

GENERAL DESCRIPTION:

Bellevue is situated at the end of a long unpaved lane south of Accokeek Road circa 2000 feet north of the Charles County line. The house is located in the westerly section of a five-acre lot, facing north toward landscaped grounds. There are woods to the north, south and east. This two-part frame dwelling consists of a two-and-one-half-story main block, with free-standing end chimneys and pent partially enclosed by an attached one-and-one-half-story kitchen wing.

The main block (circa 32 by 28 feet) is a two-and-one-half-story gable-roofed structure, three bays by two bays, with entrance in the first bay of the three-bay main north facade. Entrance is through a four-panel door with five-pane transom and five-pane sidelights. Beneath the side-lights are wainscot panels; pilasters flank the doorway. The door is sheltered by a twentieth-century neo-classical porch; its front pediment has frieze and crown molding. The porch rests on a new brick platform with a three-step approach. Its gable roof is supported by double square columns.

Windows in the main block are 6/6 double-hung-sash, have black louvered shutters, and are covered by iron grating. The building is covered with horizontal board siding and has vertical corner boards, all painted light beige. The main block has a plain boxed cornice, not continued at the gable ends. The roof is covered with (new) wooden shingles, and has (new) copper storm gutters. The building rests on a brick foundation (a course of rowlock atop six courses of common bond) which encloses a shallow crawl space.

At the west gable end of the main block are two tall exterior brick chimneys, with a projecting pent between them; both chimneys and pent are laid in American bond, with a random course of headers. The chimneys have weatherings at second story level; above the weatherings they are free-standing, circa one foot from the main block. The stacks, recently repointed, have one course of corbelling at the cap. There is a small six-pane single sash window in the north part which lights a small storage closet. The south part of the pent and the base of the southerly chimney are concealed by the kitchen wing which extends to the west. Between the stacks at loft level are two small 6/6 double hung sash windows, side by side; they have black louvered shutters. At the corresponding location in the east gable end is a similar (single) 6/6 double-hung sash window.

The interior of the main block consists of a side-stairhall (to the east) and adjoining double parlors. The open-string two-run stair rises against the east exterior wall, turns across the south end of the stairhall (dividing the second story window), and turns again to the second story. It has a heavy turned Greek Revival style newel, turned balusters, and bracketed outer string and panelled spandrel. Each of the two parlors is warmed by a fireplace in the west wall; the two identical wooden mantels have plain wide frieze with crown molding. Three small twentieth century horn-and-arrow decorations have been

United States Department of the Interior  
National Park Service


**National Register of Historic Places  
Inventory—Nomination Form**

Bellevue

Continuation sheet Prince George's County, MD Item number

7

Page 2

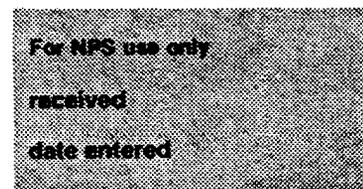

GENERAL DESCRIPTION (continued)

applied to the frieze of each mantel. A wide doorway joins the two parlors; there is evidence of hinges in the jambs. Floor boards in the main block are wide and possibly original. Molding in the door and window surrounds is sharply-profiled multi-band, and Greek Revival in style; cornerblocks have a bulls-eye decoration with projecting center. There is a molded baseboard. A plastic, egg-and-dart molding has been applied, probably circa 1950, as a cornice decoration throughout the first story. The second story consists of a wide hall, with a newly installed bathroom (converted from a small bedroom) at the north front, and bedrooms over the parlors. The trim is identical to that on the first story. The stairway continues to be a finished loft space.

A one-story shed-roof addition has been built onto the west side of the south facade. This small study is accessible from the south parlor.

Attached at the west gable end of the main block, and enclosing the southerly stack and part of the pent, is a gable-roof kitchen wing, circa 15 by 21 feet. It is one-and-one-half-stories high, with steeply pitched gable-roof, and an exterior brick chimney with weatherings at its west gable end. The kitchen wing is covered with horizontal board siding, which appears to be hand split at the west gable end. It has a plain boxed cornice. The wing rests on a brick foundation which encloses a basement space. It has been suggested that this wing may predate the main block of the house; no evidence of this has been found, however, and the arrangement of chimneys and pent suggests that the kitchen was in fact attached shortly after the main block was built.

Most of the wing is taken up by the kitchen space, which has a large fireplace in the west interior wall. An antique wooden mantel, purchased by the present owners from another house and newly installed, adorns this fireplace. New narrow floorboards replace the original flooring, and the windows are modern. The south plane of the kitchen roof has been extended to cover an enclosed porch on the south facade of the kitchen wing. It adjoins and runs flush with the one-room south addition to the main block. From this enclosed porch, one can enter the small cellar room under the kitchen wing; those sill beams which are visible in the cellar appear to be hand hewn.

Directly south of the house is a small 1930s outbuilding with extended wooden-shingle roof. It is covered with rough horizontal board siding, painted white; entrance is in the north gable end. The building rests on a concrete foundation and probably dates from the early twentieth century. To the south-east is a partially-open shed built in 1979.

On the lawn immediately north of the house is a white ash tree estimated to be 250 years old.

# 8. Significance

Period	Areas of Significance—Check and justify below			
<input type="checkbox"/> prehistoric	<input type="checkbox"/> archeology-prehistoric	<input type="checkbox"/> community planning	<input type="checkbox"/> landscape architecture	<input type="checkbox"/> religion
<input type="checkbox"/> 1400-1499	<input type="checkbox"/> archeology-historic	<input type="checkbox"/> conservation	<input type="checkbox"/> law	<input type="checkbox"/> science
<input type="checkbox"/> 1500-1599	<input type="checkbox"/> agriculture	<input type="checkbox"/> economics	<input type="checkbox"/> literature	<input type="checkbox"/> sculpture
<input type="checkbox"/> 1600-1699	<input checked="" type="checkbox"/> architecture	<input type="checkbox"/> education	<input type="checkbox"/> military	<input type="checkbox"/> social/
<input type="checkbox"/> 1700-1799	<input type="checkbox"/> art	<input type="checkbox"/> engineering	<input type="checkbox"/> music	<input type="checkbox"/> humanitarian
<input checked="" type="checkbox"/> 1800-1899	<input type="checkbox"/> commerce	<input type="checkbox"/> exploration-settlement	<input type="checkbox"/> philosophy	<input type="checkbox"/> theater
<input type="checkbox"/> 1900-	<input type="checkbox"/> communications	<input type="checkbox"/> industry	<input type="checkbox"/> politics-government	<input type="checkbox"/> transportation
		<input type="checkbox"/> invention		<input type="checkbox"/> other (specify)

**Specific dates** ca. 1840      **Builder/Architect** unknown

**Statement of Significance (in one paragraph)**

Applicable Criteria: C  
Applicable Exceptions: none  
Significance Evaluated: local


**SIGNIFICANCE SUMMARY:**

Bellevue is a fine example of an early nineteenth century plantation house with decorative elements in the Greek Revival style. It was built circa 1840 and exemplifies a house style typical of successful small plantations of the period; it is one of only three surviving examples in Prince George's County of this once popular Tidewater house style. Bellevue is in excellent condition, and retains its freestanding chimneys with brick pent, as well as a roughly contemporary kitchen wing. It stands on a five-acre, partially wooded lot which exemplifies its original plantation setting. It is an important example of Prince George's County's early architectural history.

For History and Supporting Documentation, see Continuation Sheet No.

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

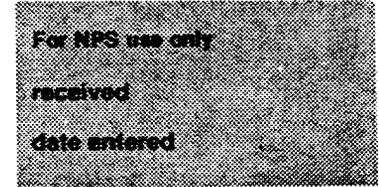

Bellevue

Continuation sheet Prince George's County, MD Item number 8 Page 3

**HISTORY AND SUPPORT:**

Bellevue stands on a tract known as "Strife," patented in 1694 by Col. John Addison.<sup>1</sup> In 1738, part of Strife was purchased by John Beall, and was later combined with other tracts to comprise the 572-acre late-eighteenth-century plantation of his son, Josias Beall.<sup>2</sup> Beall's home, a 32-foot-square frame building, stood, according to local tradition, at the site of the present house; it must have been destroyed early in the nineteenth century, although no record of its destruction has yet been discovered. The present house exhibits features of the Greek Revival style in the entrance treatment, the formal staircase, and the interior moldings, and its plan reflects one which was popular in Prince George's County in the 1840s; it was probably built by John H. Hardisty shortly after he purchased the 450-acre plantation (made up of "Strife and "Ridge") in 1839.<sup>3</sup>

This new dwelling was the home of the Hardisty family for nearly thirty years. During that period, Hardisty farmed the plantation, established a family graveyard near his new house, sold off 24 acres south of the house to the neighboring planter (John Manning), and renamed his 425-acre plantation "Bellevue."<sup>4</sup> In 1868, at the age of 60, Hardisty made an exchange of his real estate with Henrietta and Thomas Marshall, turning over to them his Bellevue plantation, and taking over from them the "Marlborough House" hotel in Upper Marlborough. For the remaining decade of his life, John H. Hardisty owned and operated this prominent hotel in the county seat.<sup>5</sup>

The Marshalls apparently never lived at Bellevue; in debt from the outset, they defaulted in payments, and Bellevue was ordered sold by Equity Court decree. At the time of its sale in 1871, it was described as follows: "improvements consist of an excellent Dwelling House, containing eight rooms, Kitchen, Three Tobacco Houses, Stable, Carriage House, Ice House, etc."<sup>6</sup> For the rest of the nineteenth century, Bellevue had a series of short term owners: in 1897 it was acquired by Reverend and Mrs. Rudolph Menk and was the home of the Menk family until 1938.<sup>7</sup>

During the 1930s and 1940s, much of the Bellevue property was divided and sold. The Hardisty family burial ground has probably been destroyed; it can no longer be located. Several small subdivisions of modern homes have been built to the west and the north. The old Bellevue plantation house stands on a five-acre lot in a rural area, set back more than one-quarter mile from the public road, and accessible by a wooded unpaved lane;<sup>8</sup> it is a significant example of an early nineteenth-century plantation house style in southern Prince George's County, of which only a few survive.<sup>9</sup>


See Continuation Sheet No. 4 for Footnotes

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

Bellevue

Continuation sheet Prince George's County, MD Item number 8 Page 4

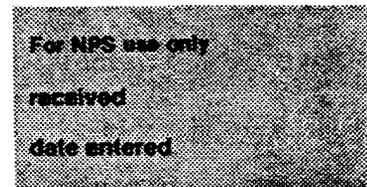

HISTORY AND SUPPORT (continued)

Footnotes


1. Patent Liber C #3:98.
2. Prince George's County Land Record, T:693.
3. 1798 Federal Direct Tax for Prince George's County, King George's Hundred; Prince George's County Land Record, AB#12:223.
4. 1850, 1860 Census Records for Prince George's County, Piscataway District; Prince George's County Tax Assessments, 1840-1868; Prince George's County Land Record, HB#1:65.
5. Prince George's County Land Records HB#1:65, 67, 69; FS#3:3; Census for Prince George's County, Marlboro District, 1870; Prince George's County Estate file #868.
6. Prince George's County Equity #810; Prince George's County Land Record HB#7:596.
7. Prince George's County Land Records, JWB#40:603; #188:464; and #512:387.
8. Prince George's County Land Records, #628:368; #4041:705; #4105:652; #4773:788. Plat SDH#4:15. Interview with present owners, October-November 1985.
9. Recent survey work in Prince George's County has identified only two other buildings of identical plan: Woodstock (82A-13), and the Turner House (87B-5). To each of these houses there is attached a lower kitchen wing which partially covers the exterior brick chimneys. In the case of the Turner House, the kitchen is a considerably later addition. Four other mid-nineteenth century dwellings, Buena Vista (70-17), Solitude (77-5), the Nourse House (77-11), and the Coffren House (86A-10) are similar to Bellevue, but have interior chimneys and/or alterations which have significantly changed the lines of the building.

CHAIN OF TITLE:

#4773:788 1 June 1977 Deed	Kenneth and Philippa Shores to Daniel and Madeleine Deming; 5.1 acres, south of Manning Road, in 5th Election District, also right of way
#4105:652 3 August 1972 Deed	Geraldine G. Wilson to Kenneth and Philippa Shores; 5.1 acres, same acquired by #4041:705

United States Department of the Interior  
National Park Service

National Register of Historic Places  
Inventory—Nomination Form

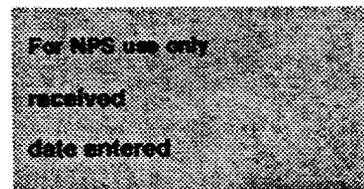

Continuation sheet Bellevue Prince George's County, MD Item number 8 Page 5

HISTORY AND SUPPORT (continued)

CHAIN OF TITLE (continued)

- #4041:705  
3 Feb. 1972  
Deed  
Lenora C. Wilson to Geraldine G. Wilson, 5.1 acres which grantor acquired by #628:368
- #628:368  
9 Mar 1942  
Deed  
Raymond and Mary T. Johnson to Lenora Wilson; two parcels of land, of which #2 is 360.91 acres of Bellevue (acquired from Menk in 1938, and described also in #188:464); minus three exceptions including two graveyards which total not more than ½ acre (described in JWB#40:603) leaving a residue to be hereby conveyed of 255 acres
- #512:387  
3 Sept 1938  
Deed  
Oswin and Hazel Menk, Theodore Menk, Martha Menk, and Gertrude Menk, all of D.C., to Raymond and Mary T. Johnson; two parcels of which #2 is 360.91 acres of Bellevue; minus three exceptions including two graveyards, leaving a residue to be hereby conveyed of 255 acres.
- #188:464  
25 Oct 1922  
Deed  
Eliza Menk, widow, to Oswin, Theodore, Martha, and Gertrude Menk; 360.91 acres of Bellevue conveyed by JWB#40:603.
- JWB#40:603  
24 May 1897  
Deed  
William, Caroline and James Underwood to Eliza Menk, wife of Rev. R. Menk of Illinois, for \$2400; 360.91 acres of Bellevue, formerly Strife and Ridge, acquired by JWB#37:745 and JWB#35:407. (except two graveyards)
- JWB#37:745  
8 Jan 1897  
Deed  
Thomas and Anna Underwood to William and James Underwood, for \$1050; 425 acres of Bellevue, formerly Strife and Ridge, part of land acquired by Thomas Marshall in 1823 by AB#2:533.
- JWB#35:407  
14 Jan 1896  
Deed  
Henry Benzinger, attorney, to Thomas Underwood, 425 acres of Bellevue; Benzinger appointed by Equity Court (#2190) to sell property of McShane, after default in mortgage.
- #2190  
Aug. 1895  
Equity  
John and Margaret McShane mortgaged property, Bellevue, and defaulted in payments; Henry Benzinger appointed to make sale of property; at sale, 8 Aug. 1895, Thomas Underwood is high bidder at \$1050, for 425 acres with "a well built two-story and attic Frame Dwelling with Brick foundation, large barn, Tenant House and other necessary outbuildings.

United States Department of the Interior  
National Park Service

National Register of Historic Places  
Inventory—Nomination Form

For NPS use only

received

date entered

Continuation sheet Bellevue Prince George's County, MD Item number 8 Page 6

HISTORY AND SUPPORT (continued)

CHAIN OF TITLE (continued)

JBW#18:262 John and Margaret McShane to Metropolitan Savings Bank of  
30 Mar 1891 Baltimore; 425 acres of Bellevue; McShane is indebted to  
Mortgage Bank \$2000.

ATB#1:94 Albert Mahone to John McShane, 425 acres of Bellevue  
1879  
Deed

HB#9:553 Henry and John McShane to Albert Mahone; 425 acres of Bellevue  
1874  
Deed

HB#8:105 Thomas Hume to Henry and John McShane; 425 acres of Bellevue  
1873  
Deed

HB#7:596 Samuel B. Hance, trustee, to Thomas L. Hume, 425 acres of  
1873 Bellevue; Hance appointed by Equity Court (#810) to sell  
Deed the property of Henrietta and Thomas Marshall, Bellevue,  
which they mortgaged to him in 1868, and then defaulted in  
payments.

#810 Thomas L. Hume vs Henrietta and Thomas Marshall; Marshalls  
1868 mortgaged their property, Bellevue, to S. B. Hance in 1868  
Equity (Hance assigned mortgage to Hume) and then defaulted in  
Mortgage payments; Hance appointed to sell property,  
Bellevue, 425 acres with "an excellent Dwelling House,  
containing eight rooms, Kitchen, three Tobacco Houses,  
Stable, Carriage House, Ice House, etc." and did sell to  
Thomas L. Hume, high bidder at \$4000.

HB#1:69 Thomas and Henrietta Marshall to S. B. Hance to secure  
3 Feb 1868 their debt (of \$3398.79) to him, their property, Bellevue  
425 acres, acquired by them on this date.

HB#1:65 John H. Hardisty to Henrietta Marshall, wife of Thomas  
3 Feb 1868 Marshall; his property, Bellevue, 425 acres (same property  
Deed of which Hardisty acquired by AB#12:223, 525 acres originally,  
Exchange but minus one parcel of 76 acres to Julianna White, AB#11:  
497, and another of 24 acres to John Manning, ON#1:385,  
reducing total acreage to 425 acres, and also excepting two  
burial grounds, separated from each other, one for whites  
and one for colored persons, not more than 1/2 acre total,  
with egress and ingress guaranteed to John Hardisty; this

United States Department of the Interior  
National Park Service

National Register of Historic Places  
Inventory—Nomination Form

Bellevue

Continuation sheet Prince George's County, MD

Item number

8

Page

7

For NPS use only

received

date entered

HISTORY AND SUPPORT (continued)

CHAIN OF TITLE (continued)

property, Bellevue, 425 acres, is Hardisty's present residence); and Marshalls in turn convey to Hardisty their interest in the Marlborough Hotel, which they acquired by HB#1:67 from S. B. Hance, trustee under Deed of Trust from Medley and Dyer, proprietors of said Hotel.

AB#12:223  
19 April 1839  
Deed

Richard H. and Harriet M. Marshall of Frederick County to John H. Hardisty of Prince George's County, for \$3500, part of two tracts, Strife and Ridge, which were conveyed to Thomas Marshall, deceased, father of Richard H. Marshall, by Mundell and McElderry, 1823 by AB#2:533 (except 76 acres sold to J. White)

AB#2:533  
14 April 1823  
Deed

Thomas Mundell and Hugh McElderry to Thomas Marshall of Charles County, 525 acres of Strife and Ridge, formerly lands of Josias F. Beall; grantors were appointed trustees to sell the real estate of Josias F. Beall, did sell to Thomas Marshall in 1817 for \$8268.75, payment has now been made, so trustees now execute this deed.

#140  
1823  
Old Equity

Thomas Marshall vs. McElderry and Mundell; McElderry and Mundell were appointed executors high bidder at sale of Beall's property; he now asks for legal conveyance of property.

TT#1:194  
18 Nov 1816  
Will

Testator, Josias Fendall Beall; devises to brother James Alexander Beall, to nephew, etc., residue of real estate to brother James Alexander Beall, executor.

JRM#17:52  
22 July 1816  
Deed of Trust


Josias F. Beall to Horatio McElderry, in trust, his lands including Strife and Ridge which he purchased from his two brothers, Robert A. and Benjamin B. Beall; to secure his debt to McElderry.

JRM#17:45  
27 April 1816  
Deed of Trust

Josias F. Beall to William Marshall and Thomas Mundell, in Trust, his lands, including Strife and Ridge which he purchased from his two brothers, Robert A. and Benjamin B. Beall, because Marshall and Mundell have cosigned not drawn by Beall.

**United States Department of the Interior  
National Park Service**

**National Register of Historic Places  
Inventory—Nomination Form**

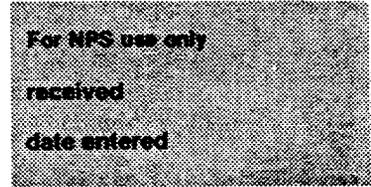

Continuation sheet Bellevue Prince George's County, MD Item number 8 and 10 Page 8

HISTORY AND SUPPORT (continued)

CHAIN OF TITLE (continued)

Unrecorded Deed      Robert Augustus Beall and Benjamin Bradley Beall to their  
21 Sept 1809          brother Josias Fendall Beall, for \$10,000, ca 800 acres in  
Deed                   Prince George's and Charles Counties, including Strife

T#1:376                   Testator, Josias Beall; to son Robert Augustus Beall, part  
12 Mar 1803           of Strife, "whereon I live," plus adjoining lands in Prince  
Will                   George's County; to John Bradley Beall, Ann Fendell Beall  
                         and Benjamin B. Beall, other lands in Charles, Prince  
                         George's and Montgomery Counties; to son Josias Fendall  
                         Beall and son James Alexander Beall, remaining estate to be  
                         divided equally; three sons, Robert A, Josias F., and James  
                         A. Beall, executors.

10. GEOGRAPHICAL DATA:

Boundary Description: The boundary is delineated on the attached map.

Boundary Justification: The 425-acre plantation which John Hardisty purchased in 1839 extended from the Charles County line (Mattawoman Creek) north to the old Accokeek Road (District 5, Road #11, 1828 Road Survey). A subdivision of small residential lots (Bellevue Estates) has been developed to the west of the house site, but more than 200 acres to the north, south and east remain undeveloped and mostly wooded. The present 5.1 acre lot on which Bellevue stands is representative of the original acreage; it consists of approximately 2½ acres of woods on the east, through which a branch of the Mattawoman Creek runs, and, on the west, 2½ acres of lawn surrounding the house, which is accessible from the north by the old farm lane.

# 9. Major Bibliographical References

See footnotes under section 8, Continuation Sheet No. 4.

# 10. Geographical Data

Acreeage of nominated property 5.1 acres

Quadrangle name Mount Vernon, Section I, VA-MD

Quadrangle scale 1:24000

### UTM References

A 

1	8	3	2	5	8	5	0	4	2	8	0	8	9	0
Zone		Easting				Northing								

B 

Zone		Easting				Northing								

C 

Zone		Easting				Northing								

D 

Zone		Easting				Northing								

E 

Zone		Easting				Northing								

F 

Zone		Easting				Northing								

G 

Zone		Easting				Northing								

H 

Zone		Easting				Northing								

### Verbal boundary description and justification

See Continuation Sheet No. 8

### List all states and counties for properties overlapping state or county boundaries

state	N/A	code	county	code
state		code	county	code

# 11. Form Prepared By

name/title Susan G. Pearl, Principal Investigator, Historic Survey Project

organization Historic Preservation Commission date January 1986

street & number c/o County Planning Division, MNCPPC  
14741 Gov. Oden Bowie Drive telephone (301) 952-3521


city or town Upper Marlboro state Maryland 20772

# 12. State Historic Preservation Officer Certification

The evaluated significance of this property within the state is:

national  state  local

As the designated State Historic Preservation Officer for the National Historic Preservation Act of 1966 (Public Law 89-665), I hereby nominate this property for inclusion in the National Register and certify that it has been evaluated according to the criteria and procedures set forth by the National Park Service.

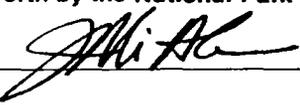State Historic Preservation Officer signature  7-22-86

title STATE HISTORIC PRESERVATION OFFICER date

For NPS use only

I hereby certify that this property is included in the National Register

date

Keeper of the National Register

Attest:

date

Chief of Registration

# Maryland Historical Trust State Historic Sites Inventory Form

## 1. Name (indicate preferred name)

historic Bellevue

and/or common Bellevue

## 2. Location

street & number 200 Manning Road East  not for publicationcity, town Accokeek  vicinity of congressional district 4

state Maryland county Prince George's

## 3. Classification

Category	Ownership	Status	Present Use
<input type="checkbox"/> district	<input type="checkbox"/> public	<input checked="" type="checkbox"/> occupied	<input type="checkbox"/> agriculture <input type="checkbox"/> museum
<input checked="" type="checkbox"/> building(s)	<input checked="" type="checkbox"/> private	<input type="checkbox"/> unoccupied	<input type="checkbox"/> commercial <input type="checkbox"/> park
<input type="checkbox"/> structure	<input type="checkbox"/> both	<input type="checkbox"/> work in progress	<input type="checkbox"/> educational <input checked="" type="checkbox"/> private residence
<input type="checkbox"/> site	<b>Public Acquisition</b>	<b>Accessible</b>	<input type="checkbox"/> entertainment <input type="checkbox"/> religious
<input type="checkbox"/> object	<input type="checkbox"/> in process	<input type="checkbox"/> yes: restricted	<input type="checkbox"/> government <input type="checkbox"/> scientific
	<input type="checkbox"/> being considered	<input type="checkbox"/> yes: unrestricted	<input type="checkbox"/> industrial <input type="checkbox"/> transportation
	<input checked="" type="checkbox"/> not applicable	<input checked="" type="checkbox"/> no	<input type="checkbox"/> military <input type="checkbox"/> other:

## 4. Owner of Property (give names and mailing addresses of all owners)

name Daniel and Madeleine H. Deming

street &amp; number P.O. Box 103 telephone no.: 292-5130

city, town Accokeek state and zip code MD 20607

## 5. Location of Legal Description

courthouse, registry of deeds, etc. Prince George's County Courthouse liber 4773

street &amp; number Main Street folio 788

city, town Upper Marlboro state MD 20772

## 6. Representation in Existing Historical Surveys

title Prince George's County Inventory of Historic Sites

date 1974  federal  state  county  local

depository for survey records County Planning Division, M-NCPPC

city, town Upper Marlboro state MD 20772

# 7. Description

Survey No.P.G.#84-20

<b>Condition</b>		<b>Check one</b>	<b>Check one</b>	
<input checked="" type="checkbox"/> excellent	<input type="checkbox"/> deteriorated	<input type="checkbox"/> unaltered	<input checked="" type="checkbox"/> original site	
<input type="checkbox"/> good	<input type="checkbox"/> ruins	<input checked="" type="checkbox"/> altered	<input type="checkbox"/> moved	date of move _____
<input type="checkbox"/> fair	<input type="checkbox"/> unexposed			

Prepare both a summary paragraph and a general description of the resource and its various elements as it exists today.

## Summary Description

Bellevue is a gable-roofed frame side-hall-and-double-parlor-plan plantation house of the second quarter of the nineteenth century. It consists of a two-and-one-half-story main block with two freestanding brick chimneys and pent, partially enclosed by a one-and-one-half-story kitchen wing; interior details are in the Greek Revival style. To the south and east of the house are two twentieth century outbuildings. This complex of buildings stands in a rural area east of Accokeek in southern Prince George's County, Maryland.

## General Description

Bellevue is situated at the end of a long unpaved lane south of Accokeek road circa 2000 feet north of the Charles County line. The house is located in the westerly section of a five-acre lot, facing north toward landscaped grounds. There are woods to the north, south and east. This two-part frame dwelling consists of a two-and-one-half-story main block, with free-standing end chimneys and pent partially enclosed by an attached one-and-one-half-story kitchen wing.

The main block (circa 32 by 28 feet) is a two-and-one-half-story gable-roofed structure, three bays by two bays, with entrance in the first bay of the three-bay main north facade. Entrance is through a four-panel door with five-pane transom and five-pane sidelights. Beneath the sidelights are wainscot panels; pilasters flank the doorway. The door is sheltered by a twentieth-century neo-classical porch; its front pediment has frieze and crown molding. The porch rests on a new brick platform with a three-step approach. Its gable roof is supported by double square columns.

Windows in the main block are 6/6 double-hung-sash, have black louvered shutters, and are covered by iron grating. The building is covered with horizontal board siding and has vertical corner boards, all painted light beige. The main block has a plain boxed cornice, not continued at the gable ends. The roof is covered with (new) wooden shingles, and has (new) copper storm gutters. The building rests on a brick foundation (a course of rowlock atop six courses of common bond) which encloses a shallow crawl space.

# 8. Significance

<b>Period</b>	<b>Areas of Significance—Check and justify below</b>			
<input type="checkbox"/> prehistoric	<input type="checkbox"/> archeology-prehistoric	<input type="checkbox"/> community planning	<input type="checkbox"/> landscape architecture	<input type="checkbox"/> religion
<input type="checkbox"/> 1400-1499	<input type="checkbox"/> archeology-historic	<input type="checkbox"/> conservation	<input type="checkbox"/> law	<input type="checkbox"/> science
<input type="checkbox"/> 1500-1599	<input type="checkbox"/> agriculture	<input type="checkbox"/> economics	<input type="checkbox"/> literature	<input type="checkbox"/> sculpture
<input type="checkbox"/> 1600-1699	<input checked="" type="checkbox"/> architecture	<input type="checkbox"/> education	<input type="checkbox"/> military	<input type="checkbox"/> social/humanitarian
<input type="checkbox"/> 1700-1799	<input type="checkbox"/> art	<input type="checkbox"/> engineering	<input type="checkbox"/> music	<input type="checkbox"/> theater
<input checked="" type="checkbox"/> 1800-1899	<input type="checkbox"/> commerce	<input type="checkbox"/> exploration/settlement	<input type="checkbox"/> philosophy	<input type="checkbox"/> transportation
<input type="checkbox"/> 1900-	<input type="checkbox"/> communications	<input type="checkbox"/> industry	<input type="checkbox"/> politics/government	<input type="checkbox"/> other (specify)
		<input type="checkbox"/> invention		

**Specific dates** ca. 1840                      **Builder/Architect** Unknown

check: Applicable Criteria:  A  B  C  D  
 and/or  
 Applicable Exception:  A  B  C  D  E  F  G  
 Level of Significance:  national  state  local

Prepare both a summary paragraph of significance and a general statement of history and support.

Significance

Bellevue is a fine example of an early nineteenth century plantation house with decorative elements in the Greek Revival style. It was built circa 1840 and exemplifies a house style typical of successful small plantations of the period; it is one of only three surviving examples in Prince George's County of this once popular Tidewater house style. Bellevue is in excellent condition, and retains its freestanding chimneys with brick pent, as well as a roughly contemporary kitchen wing. It stands on a five-acre, partially wooded lot which exemplifies its original plantation setting. It is an important example of Prince George's County's early architectural history.

History and Support

Bellevue stands on a tract known as "Strife", patented in 1694 by Col. John Addison.<sup>1</sup> In 1738, part of Strife was purchased by John Beall, and was later combined with other tracts to comprise the 572-acre late-eighteenth-century plantation of his son, Josias Beall.<sup>2</sup> Beall's home, a 32-foot-square frame building, stood, according to local tradition, at the site of the present house; it must have been destroyed early in the nineteenth century, although no record of its destruction has yet been discovered. The present house exhibits features of the Greek Revival style in the entrance treatment, the formal staircase, and the interior moldings, and its plan reflects one which was popular in Prince George's County in the 1840's; it was probably built by John H. Hardisty shortly after he purchased the 450-acre plantation (made up of "Strife" and "Ridge") in 1839.<sup>3</sup>

This new dwelling was the home of the Hardisty family for nearly thirty years. During that period, Hardisty farmed the plantation, established a family graveyard near his new house, sold off 24 acres south of the house to the neighboring planter (John Manning), and renamed his 425-acre plantation "Bellevue".<sup>4</sup> In 1868, at the age of 60, Hardisty made an exchange of his real estate with Henrietta and Thomas Marshall, turning over to them his Bellevue plantation, and taking over from them the "Marlborough House" hotel

# 9. Major Bibliographical References

Survey No. P.G.#84-20

cf. Notes, Item #8  
cf. Chain of Title

# 10. Geographical Data

Acreeage of nominated property 5.1 acres (Tax Map #161, parcel 195)  
Quadrangle name Mount Vernon, Section I ; Piscataway, Sec.G Quadrangle scale \_\_\_\_\_

UTM References do NOT complete UTM references

A	<input type="text"/>	<input type="text"/>	<input type="text"/>	B	<input type="text"/>	<input type="text"/>	<input type="text"/>
	Zone	Easting	Northing		Zone	Easting	Northing
C	<input type="text"/>	<input type="text"/>	<input type="text"/>	D	<input type="text"/>	<input type="text"/>	<input type="text"/>
E	<input type="text"/>	<input type="text"/>	<input type="text"/>	F	<input type="text"/>	<input type="text"/>	<input type="text"/>
G	<input type="text"/>	<input type="text"/>	<input type="text"/>	H	<input type="text"/>	<input type="text"/>	<input type="text"/>

Verbal boundary description and justification

List all states and counties for properties overlapping state or county boundaries

state	code	county	code

# 11. Form Prepared By

name/title	Susan G. Pearl, Principal Investigator, Historic Survey Project		
organization	Historic Preservation Commission	date	January 1986
street & number	c/o County Planning Division, M-NCPPC	telephone	952-3521
	14741 Gov. Oden Bowie Drive		
city or town	Upper Marlboro	state	Maryland 20772

The Maryland Historic Sites Inventory was officially created by an Act of the Maryland Legislature to be found in the Annotated Code of Maryland, Article 41, Section 181 KA, 1974 supplement.

The survey and inventory are being prepared for information and record purposes only and do not constitute any infringement of individual property rights.

return to: Maryland Historical Trust  
Shaw House  
21 State Circle  
Annapolis, Maryland 21401  
(301) 269-2438

## #7. Continued

At the west gable end of the main block are two tall exterior brick chimneys, with a projecting pent between them; both chimneys and pent are laid in American bond, with a random course of headers. The chimneys have weatherings at second story level; above the weatherings they are free-standing, circa one foot from the main block. The stacks, recently repointed, have one course of corbelling at the cap. There is a small six-pane single-sash window in the north part of the pent which lights a small storage closet. The south part of the pent and the base of the southerly chimney are concealed by the kitchen wing which extends to the west. Between the stacks at loft level are two small 6/6 double hung sash windows, side by side; they have black louvered shutters. At the corresponding location in the east gable end is a similar (single) 6/6 double-hung sash window.

The interior of the main block consists of a side-stairhall (to the east) and adjoining double parlors. The open-string two-run stair rises against the east exterior wall, turns across the south end of the stairhall (dividing the second story window), and turns again to the second story. It has a heavy turned Greek Revival style newel, turned balusters, and bracketed outer string and panelled spandrel. Each of the two parlors is warmed by a fireplace in the west wall; the two identical wooden mantels have plain wide frieze with crown molding. Three small twentieth century horn-and-arrow decorations have been applied to the frieze of each mantel. A wide doorway joins the two parlors; there is evidence of hinges in the jambs. Floor boards in the main block are wide and possibly original. Molding in the door and window surrounds is sharply-profiled multi-band, and Greek Revival in style; cornerblocks have a bulls-eye decoration with projecting center. There is a molded baseboard. A plastic, egg-and-dart molding has been applied, probably circa 1950, as a cornice decoration throughout the first story. The second story consists of a wide hall, with a newly installed bathroom (converted from a small bedroom) at the north front, and bedrooms over the parlors. The trim is identical to that on the first story. The stairway continues to a finished loft space.

A one-story shed-roof addition has been built onto the west side of the south facade. This small study is accessible from the south parlor.

Attached at the west gable end of the main block, and enclosing the southerly stack and part of the pent, is a gable-roof kitchen wing, circa 15 by 21 feet. It is one-and-one-half-stories high, with steeply pitched gable-roof, and an exterior brick chimney with weatherings at its west gable end. The kitchen wing is covered with horizontal board siding, which appears to be hand split at the west gable end. It has a plain boxed cornice. The wing rests on a brick foundation which encloses a basement space. It has been suggested that this wing may predate the main block of the house; no evidence of this has been found, however, and the arrangement of chimneys and pent suggests that the kitchen was in fact attached shortly after the main block was built.

## #7. Continued

Most of the wing is taken up by the kitchen space, which has a large fireplace in the west interior wall. An antique wooden mantel, purchased by the present owners from another house and newly installed, adorns this fireplace. New narrow floorboards replace the original flooring, and the windows are modern. The south plane of the kitchen roof has been extended to cover an enclosed porch on the south facade of the kitchen wing. It adjoins and runs flush with the one-room south addition to the main block. From this enclosed porch, one can enter the small cellar room under the kitchen wing; those sill beams which are visible in the cellar appear to be hand hewn.

Directly south of the house is a small outbuilding with extended wooden-shingled gable roof. It is covered with rough horizontal board siding, painted white; entrance is in the north gable end. The building rests on a concrete foundation; it was constructed in the 1930's to house an electrical generator. A short distance to the southeast stands a partially-open donkey shed; it was built in the 1970's.

On the lawn immediately north of the house is a white ash tree estimated to be 250 years old.

## #8. Continued

in Upper Marlborough. For the remaining decade of his life, John H. Hardisty owned and operated this prominent hotel in the county seat.<sup>5</sup>

The Marshalls apparently never lived at Bellevue; in debt from the outset, they defaulted in payments, and Bellevue was ordered sold by Equity Court decree. At the time of its sale in 1871, it was described as follows: "improvements consist of an excellent Dwelling House, containing eight rooms, Kitchen, Three Tobacco Houses, Stable, Carriage House, Ice House, etc."<sup>6</sup> For the rest of the nineteenth century, Bellevue had a series of short term owners; in 1897 it was acquired by Reverend and Mrs. Rudolph Menk and was the home of the Menk family until 1938.<sup>7</sup>

During the 1930's and 1940's, much of the Bellevue property was divided and sold. The Hardisty family burial ground has probably been destroyed; it can no longer be located. Several small subdivisions of modern homes have been built to the west and the north. The old Bellevue plantation house stands on a five-acre lot in a rural area, set back more than one-quarter mile from the public road, and accessible by a wooded unpaved lane;<sup>8</sup> it is a significant example of an early nineteenth-century plantation house style in southern Prince George's County, of which only a few survive.<sup>9</sup>

Notes

1 Patent Liber C #3:98.

2 Prince George's County Land Record, T:693.

3 1798 Federal Direct Tax for Prince George's County, King George's Hundred; Prince George's County Land Record, AB#12:223.

4 1850, 1860 Census Records for Prince George's County, Piscataway District; Prince George's County Tax Assessments, 1840-1868; Prince George's County Land Record, HB#1:65.

5 Prince George's County Land Records HB#1:65, 67, 69; FS#3:3; Census for Prince George's County, Marlboro District, 1870; Prince George's County Estate file #868.

6 Prince George's County Equity #810; Prince George's County Land Record HB#7:596.




7 Prince George's County Land Records, JWB#40:603; #188:464; and #512:387.

8 Prince George's County Land Records, #628:368; #4041:705; #4105:652; #4773:788. Plat SDH#4:15. Interview with present owners, October-November 1985.

## #8. Continued

<sup>9</sup> Recent survey work in Prince George's County has identified only two other buildings of identical plan: Woodstock (82A-13), and the Turner House (87B-5). To each of these houses there is attached a lower kitchen wing which partially covers the exterior brick chimneys. In the case of the Turner House, the kitchen is a considerably later addition. Four other mid-nineteenth century dwellings [Buena Vista (70-17), Solitude (77-5), the Nourse House (77-11), and the Coffren House (86A-10)] are similar to Bellevue, but have interior chimneys and/or alterations which have significantly changed the lines of the building.

The 425-acre plantation which John Hardisty purchased in 1839 extended from the Charles County line (Mattawoman Creek) north to the old Accokeek Road (District 5, Road #11, 1828 Road Survey). A subdivision of small residential lots (Bellevue Estates) has been developed to the west of the house site, but more than 200 acres to the north, south and east remain undeveloped and mostly wooded. The present 5.1 acre lot on which Bellevue stands is representative of the original acreage; it consists of approximately 2 1/2 acres of woods on the east, through which a branch of the Mattawoman Creek runs, and, on the west, 2 1/2 acres of lawn surrounding the house, which is accessible from the north by the old farm lane.

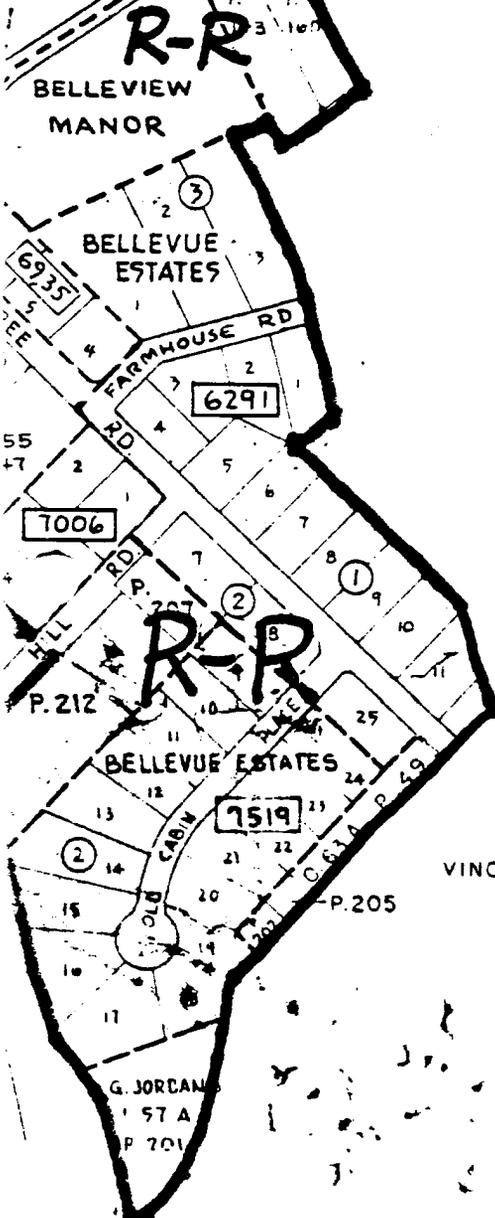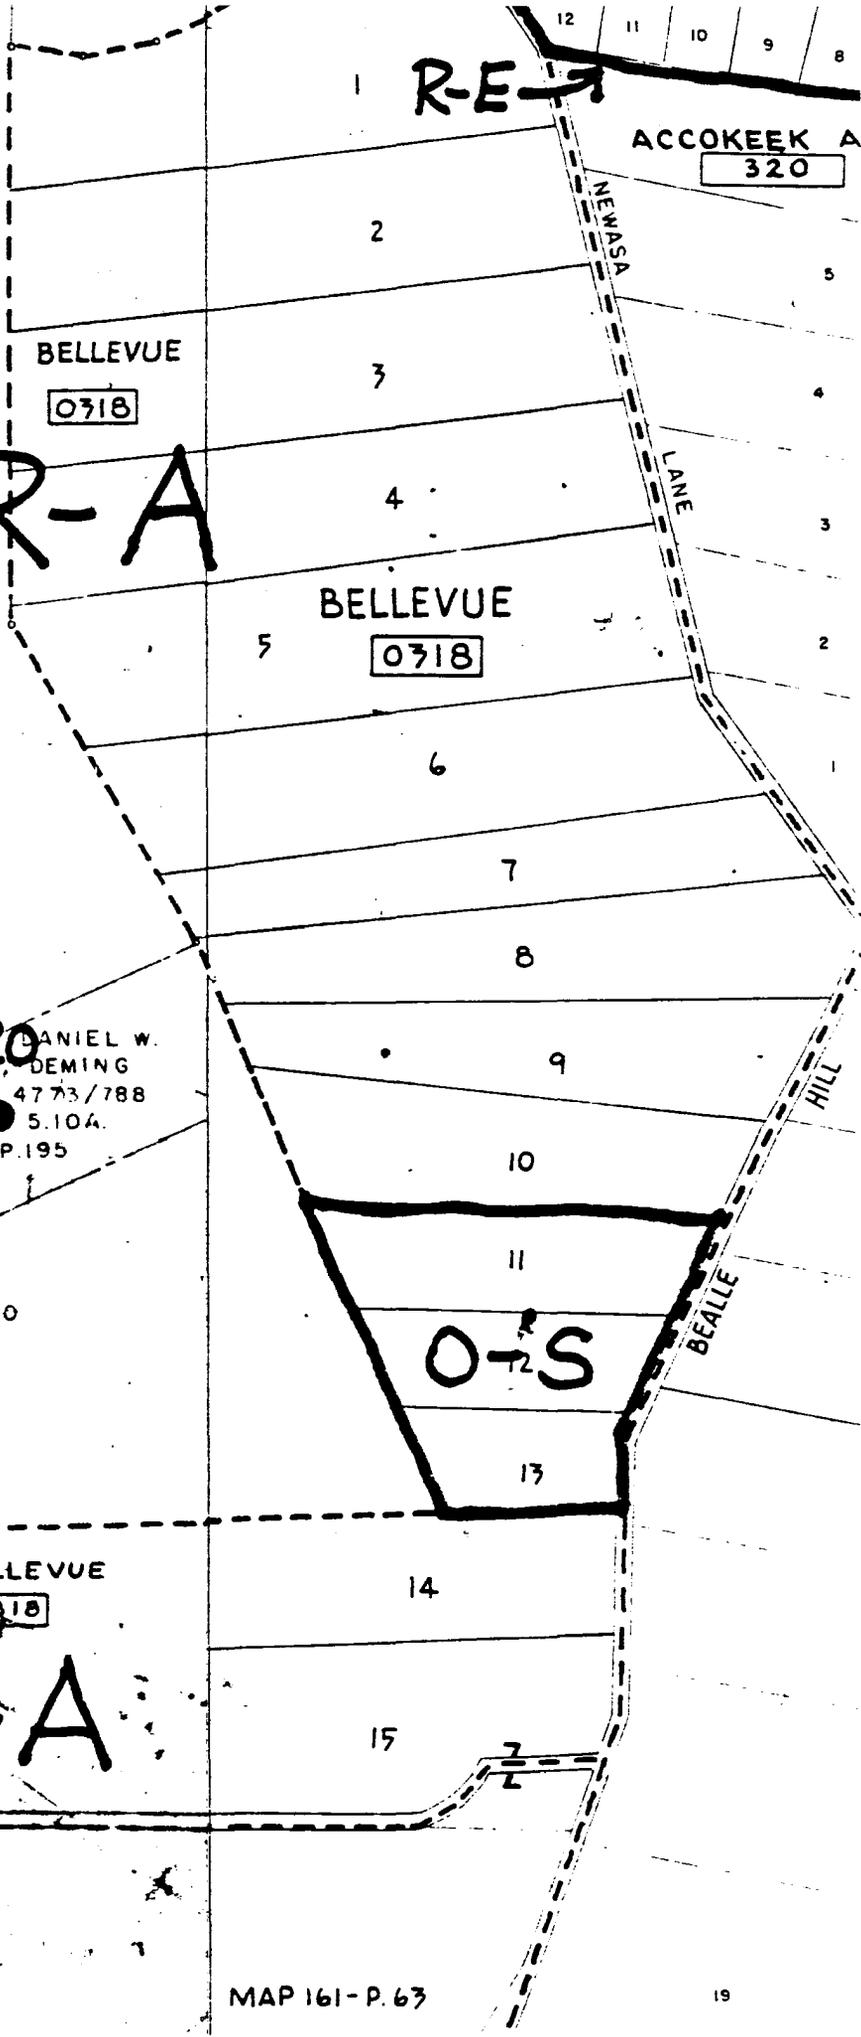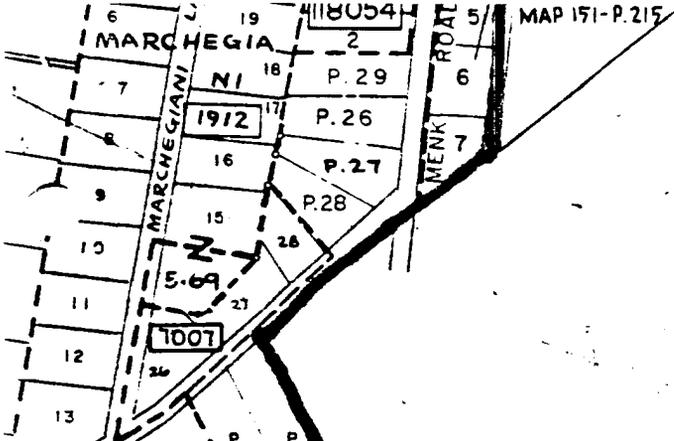


PG-84-20 DANIEL W. DEMING  
 47 73/788  
 ● 5.104.  
 P.195

VINCENT D. PALUMO  
 4354 / 646  
 88.13 A  
 P.194

ERNEST B MCGOY, ETAL  
 5704 / 870  
 68 53A

MAP 161-P.63

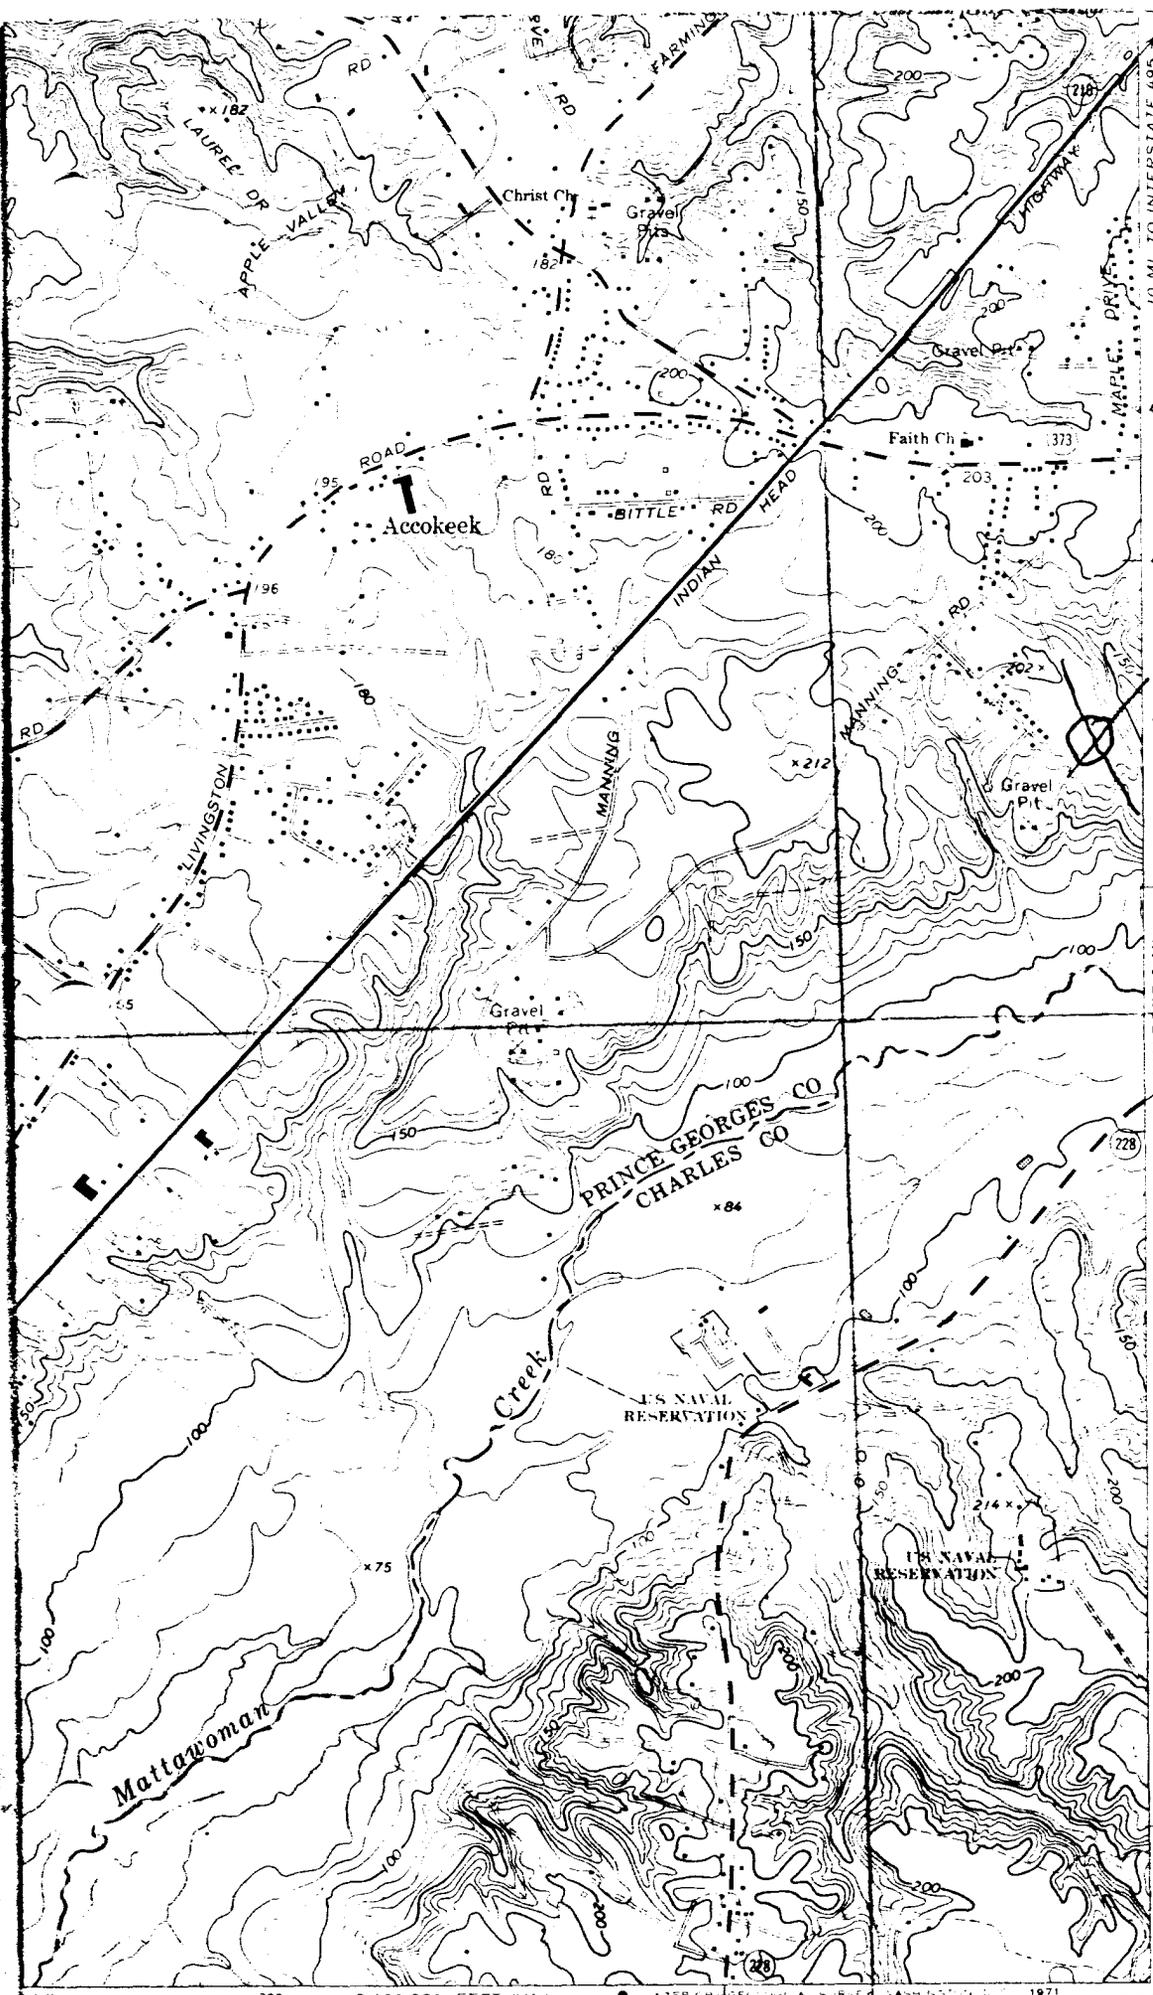

PG: 84-20  
 Bellevue  
 Prince Georges  
 County  
 Maryland  
 18/325850/4280890

10 MI TO INTERSTATE 495  
 4282  
 40'  
 4281  
 WALDORE 6 MI  
 4280  
 360 000 FEET (VA.)  
 4279  
 4278  
 4277000m N  
 38° 37' 30"  
 77° 00'



P.G.#84-20

Bellevue

Prince George's County, MD

Susan G. Pearl

10 October 1985

South elevation

Neg: Md. Historical Trust, Annapolis, MD



P.G.#84-20

Bellevue

Prince George's County, MD

Susan G. Pearl

10 October 1985

Southwest 3/4 elevation

Neg: Md. Historical Trust, Annapolis, MD



P.G.#84-20

Bellevue

Prince George's County, MD

Susan G. Pearl

10 October 1985

North elevation

Neg: Md. Historical Trust, Annapolis, MD



P.G.#84-20

Bellevue  
Prince George's County, MD  
Susan G. Pearl  
10 October 1985  
East elevation  
Neg: Md. Historical Trust, Annapolis, MD



P.G.#84-20

Bellevue

Prince George's County, MD

Susan G. Pearl

10 October 1985

North entrance

Neg: Md. Historical Trust, Annapolis, MD



P.G.#84-20

Bellevue

Prince George's County, MD

Susan G. Pearl

10 October 1985

Detail, South parlor

Neg: Md. Historical Trust, Annapolis,  
MD



P.G.#84-20

Bellevue

Prince George's County, MD

Susan G. Pearl

10 October 1985

Interior, Staircase detail

Neg: Md. Historical Trust, Annapolis, MD



P.G.#84-20

Bellevue

Prince George's County, MD

Susan G. Pearl

10 October 1985

Interior, stairhall from north

Neg: Md. Historical Trust, Annapolis, MD



P.G.#84-20

Bellevue

Prince George's County, MD

Susan G. Pearl

10 October 1985

Interior, mantel in South parlor

Neg: Md. Historical Trust, Annapolis, MD

PRINCE GEORGE'S COUNTY  
HISTORIC SITES SUMMARY SHEET

P.G. County Survey # 84-20 Date before 1840

Building Name Bellevue (Beall-Marshall House)

Location 200 East Manning Road, Accokeek

Open to Public  yes  no ~~restricted~~

Bellevue, known also as the Beall-Marshall house, is a large frame house, built in two parts. The main section is two stories high, three bays wide, with two free standing chimneys on the west. Joined at this point is a one-story three-bay wing. Land records indicate that the larger section was built around 1840, while the west wing appears to be older.

The property was purchased in 1738 by John Beall, Jr.; his son Josias (1725-1803) is known to have lived on this site. It is possible that he lived in what remains as the present west wing. Josias Beall served on the Committee of Observation in 1775, served as a delegate to the General Assembly for several years, and in 1779 became Speaker of the House of Delegates.

The property was sold out of the Beall family in 1815, and has had a succession of owners since that time.

INVENTORY FORM FOR STATE HISTORIC SITES SURVEY

**1 NAME**

HISTORIC

Bellevue

AND/OR COMMON

Beall-Marshall House

**2 LOCATION**

STREET & NUMBER

200 East Manning Road

CITY, TOWN

Accokeek

— VICINITY OF Accokeek

CONGRESSIONAL DISTRICT

4th

STATE

Maryland

COUNTY

P.G.

**3 CLASSIFICATION**

CATEGORY	OWNERSHIP	STATUS	PRESENT USE
<input type="checkbox"/> DISTRICT	<input type="checkbox"/> PUBLIC	<input checked="" type="checkbox"/> OCCUPIED	<input type="checkbox"/> AGRICULTURE
<input checked="" type="checkbox"/> BUILDING(S)	<input checked="" type="checkbox"/> PRIVATE	<input type="checkbox"/> UNOCCUPIED	<input type="checkbox"/> MUSEUM
<input type="checkbox"/> STRUCTURE	<input type="checkbox"/> BOTH	<input type="checkbox"/> WORK IN PROGRESS	<input type="checkbox"/> COMMERCIAL
<input type="checkbox"/> SITE	<b>PUBLIC ACQUISITION</b>	<b>ACCESSIBLE</b>	<input type="checkbox"/> EDUCATIONAL
<input type="checkbox"/> OBJECT	<input type="checkbox"/> IN PROCESS	<input checked="" type="checkbox"/> YES: RESTRICTED	<input checked="" type="checkbox"/> PRIVATE RESIDENCE
	<input type="checkbox"/> BEING CONSIDERED	<input type="checkbox"/> YES: UNRESTRICTED	<input type="checkbox"/> ENTERTAINMENT
		<input type="checkbox"/> NO	<input type="checkbox"/> RELIGIOUS
			<input type="checkbox"/> GOVERNMENT
			<input type="checkbox"/> INDUSTRIAL
			<input type="checkbox"/> MILITARY
			<input type="checkbox"/> OTHER

**4 OWNER OF PROPERTY**

NAME

Daniel W. & Madeleine H. Deming

Telephone #:

STREET & NUMBER

P.O. Box 103

CITY, TOWN

Accokeek

— VICINITY OF

STATE, zip code

Maryland 20607

**5 LOCATION OF LEGAL DESCRIPTION**

COURTHOUSE,  
REGISTRY OF DEEDS, ETC.

P.G. Co. Courthouse

Liber #: 4773

Folio #: 788

STREET & NUMBER

Main Street

CITY, TOWN

Upper Marlboro

STATE

Md.

**6 REPRESENTATION IN EXISTING SURVEYS**

TITLE

(not in HABS)

P.G. County Survey

DATE

—FEDERAL —STATE —COUNTY —LOCAL

DEPOSITORY FOR  
SURVEY RECORDS

CITY, TOWN

STATE

**7 DESCRIPTION**

CONDITION		CHECK ONE	CHECK ONE
<input type="checkbox"/> EXCELLENT	<input type="checkbox"/> DETERIORATED	<input type="checkbox"/> UNALTERED	<input checked="" type="checkbox"/> ORIGINAL SITE
<input checked="" type="checkbox"/> GOOD	<input type="checkbox"/> RUINS	<input checked="" type="checkbox"/> ALTERED	<input type="checkbox"/> MOVED    DATE _____
<input type="checkbox"/> FAIR	<input type="checkbox"/> UNEXPOSED		

DESCRIBE THE PRESENT AND ORIGINAL (IF KNOWN) PHYSICAL APPEARANCE

Bellevue is a large frame house, three bays wide, built in two parts. The main section is two stories high with two brick, exterior, free-standing chimneys at the west gable. Between these chimneys is a one-story pent with one small window. All of the windows are shuttered and are six-lights-over-six. The main entrance is in the first bay of the east facade. The door has four molded, vertical panels and is surrounded by a five-light rectangular transom and sidelights of four panes. The small, square, one-story portico has two slender columns at each corner. In the crawl space under the house may be seen adze-hewn floor joists bearing marks which indicate they have been part of an earlier structure.

The one-story three-bay frame, gable roofed wing projects from the west end of the main house. It has a stone cellar. The large exterior free-standing chimney is centered at the west gable end.

There are no outbuildings.

The present owner states that beneath the east lawn there is a broad brick foundation wall foundation projecting from the house.

An 1871 advertisement for a trustees sale in a Washington newspaper listed Bellevue as an "...excellent dwelling house containing eight rooms, kitchen,..." The present house contains eight rooms, kitchen, and a passage-way to it.

Tree experts from the University of Maryland have estimated that the large white ash tree in the front yard is over two-hundred and fifty years old.

**8 SIGNIFICANCE**

PG:84-20

PERIOD		AREAS OF SIGNIFICANCE -- CHECK AND JUSTIFY BELOW			
<input type="checkbox"/> PREHISTORIC	<input type="checkbox"/> ARCHEOLOGY-PREHISTORIC	<input type="checkbox"/> COMMUNITY PLANNING	<input type="checkbox"/> LANDSCAPE ARCHITECTURE	<input type="checkbox"/> RELIGION	
<input type="checkbox"/> 1400-1499	<input type="checkbox"/> ARCHEOLOGY-HISTORIC	<input type="checkbox"/> CONSERVATION	<input type="checkbox"/> LAW	<input type="checkbox"/> SCIENCE	
<input type="checkbox"/> 1500-1599	<input type="checkbox"/> AGRICULTURE	<input type="checkbox"/> ECONOMICS	<input type="checkbox"/> LITERATURE	<input type="checkbox"/> SCULPTURE	
<input type="checkbox"/> 1600-1699	<input checked="" type="checkbox"/> ARCHITECTURE	<input type="checkbox"/> EDUCATION	<input type="checkbox"/> MILITARY	<input type="checkbox"/> SOCIAL/HUMANITARIAN	
<input checked="" type="checkbox"/> 1700-1799	<input type="checkbox"/> ART	<input type="checkbox"/> ENGINEERING	<input type="checkbox"/> MUSIC	<input type="checkbox"/> THEATER	
<input checked="" type="checkbox"/> 1800-1899	<input type="checkbox"/> COMMERCE	<input type="checkbox"/> EXPLORATION/SETTLEMENT	<input type="checkbox"/> PHILOSOPHY	<input type="checkbox"/> TRANSPORTATION	
<input type="checkbox"/> 1900-	<input type="checkbox"/> COMMUNICATIONS	<input type="checkbox"/> INDUSTRY	<input type="checkbox"/> POLITICS/GOVERNMENT	<input checked="" type="checkbox"/> OTHER (SPECIFY) Local history	
		<input type="checkbox"/> INVENTION			

SPECIFIC DATES 1840

BUILDER/ARCHITECT

## STATEMENT OF SIGNIFICANCE

Land records indicate that the larger part of Bellevue was built about 1840. The west wing appears to be older. This house is the only large, old, frame house left in the Accokeek area.

In 1738, John Beall, Jr. purchased part of the tract Strife on which Bellevue is located. He did not live on this land but his son Josias (1725-1803) stated in his will that he lived on Strife. Traditionally, Josias Beall lived at the site of the present house, possibly the part that remains as the west wing. An outstanding member of one of Maryland's most prominent colonial families, Josias Beall served on the Committee of Observation in 1775, was a delegate to the General Assembly for several years, and in 1779 became the Speaker of the House of Delegates.

In 1815 the property was sold out of the Beall family and has had a succession of about twenty owners since that time.

**9 MAJOR BIBLIOGRAPHICAL REFERENCES**

P.G. Co. Land Records: Liber T, fol.693; Liber JRM 16, fol. 45 & 52; Liber AB 2, fol.533; Liber AB 7, fol.233; Liber HB 1, fol.65; Liber HB 7, fol.596; Liber HB 8, fol.105; Liber HB 9, fol.553; Liber JWB 35, fol.407; Liber JWB 37, fol.745; Liber JWB 40, fol.603; Liber 188, fol. 484; Liber 628, fol.368. P.G. Co. Wills: Liber T 1, fol.527.  
 Hienton, L.J. Prince George's Heritage, MHS, 1974

~~CONTINUE ON SEPARATE SHEET IF NECESSARY~~

**10 GEOGRAPHICAL DATA**

ACREAGE OF NOMINATED PROPERTY \_\_\_\_\_

VERBAL BOUNDARY DESCRIPTION

LIST ALL STATES AND COUNTIES FOR PROPERTIES OVERLAPPING STATE OR COUNTY BOUNDARIES

STATE	COUNTY
STATE	COUNTY

**11 FORM PREPARED BY**

NAME / TITLE	
Margaret W. Cook and Daniel W. Deming	
ORGANIZATION	DATE
P.G. Co. Historical & Cultural Trust	November 1978
STREET & NUMBER	TELEPHONE
5621 Delaware Drive	301-839-3638
CITY OR TOWN	STATE
Oxon Hill	Maryland 20021

The Maryland Historic Sites Inventory was officially created by an Act of the Maryland Legislature, to be found in the Annotated Code of Maryland, Article 41, Section 181 KA, 1974 Supplement.

The Survey and Inventory are being prepared for information and record purposes only and do not constitute any infringement of individual property rights.

RETURN TO: Maryland Historical Trust  
 The Shaw House, 21 State Circle  
 Annapolis, Maryland 21401  
 (301) 267-1438

MARYLAND HISTORICAL TRUST WORKSHEET

NOMINATION FORM for the NATIONAL REGISTER OF HISTORIC PLACES, NATIONAL PARKS SERVICE

SEE INSTRUCTIONS

**1. NAME**

COMMON: Belleview

AND/OR HISTORIC: Beall/Marshall House

**2. LOCATION**

STREET AND NUMBER: Manning Road

CITY OR TOWN: Accokeek

STATE: Maryland COUNTY: Prince George's

**3. CLASSIFICATION**

CATEGORY (Check One)	OWNERSHIP	STATUS	ACCESSIBLE TO THE PUBLIC
<input type="checkbox"/> District <input type="checkbox"/> Site <input type="checkbox"/> Object	<input checked="" type="checkbox"/> Building <input type="checkbox"/> Structure <input type="checkbox"/> Public <input checked="" type="checkbox"/> Private <input type="checkbox"/> Both	<input checked="" type="checkbox"/> Occupied <input type="checkbox"/> Unoccupied <input type="checkbox"/> Preservation work in progress	Yes: <input type="checkbox"/> Restricted <input type="checkbox"/> Unrestricted <input checked="" type="checkbox"/> No

PRESENT USE (Check One or More as Appropriate)

<input type="checkbox"/> Agricultural	<input type="checkbox"/> Government	<input type="checkbox"/> Park	<input type="checkbox"/> Transportation	<input type="checkbox"/> Comments
<input type="checkbox"/> Commercial	<input type="checkbox"/> Industrial	<input checked="" type="checkbox"/> Private Residence	<input type="checkbox"/> Other (Specify)	
<input type="checkbox"/> Educational	<input type="checkbox"/> Military	<input type="checkbox"/> Religious		
<input type="checkbox"/> Entertainment	<input type="checkbox"/> Museum	<input type="checkbox"/> Scientific		

**4. OWNER OF PROPERTY**

OWNER'S NAME: Kenneth L. Shores

STREET AND NUMBER: Manning Road

CITY OR TOWN: Accokeek STATE: Maryland

**5. LOCATION OF LEGAL DESCRIPTION**

COURTHOUSE, REGISTRY OF DEEDS, ETC.: Prince George's County Courthouse

STREET AND NUMBER:

CITY OR TOWN: Upper Marlboro STATE: Maryland

Title Reference of Current Deed (Book & Pg. #):

**6. REPRESENTATION IN EXISTING SURVEYS**

TITLE OF SURVEY: None

DATE OF SURVEY:  Federal  State  County  Local

DEPOSITORY FOR SURVEY RECORDS:

STREET AND NUMBER:

CITY OR TOWN: STATE:

7. DESCRIPTION

CONDITION	(Check One)					
	<input type="checkbox"/> Excellent	<input checked="" type="checkbox"/> Good	<input type="checkbox"/> Fair	<input type="checkbox"/> Deteriorated	<input type="checkbox"/> Ruins	<input type="checkbox"/> Unexposed
	(Check One)			(Check One)		
	<input checked="" type="checkbox"/> Altered	<input type="checkbox"/> Unaltered	<input type="checkbox"/> Moved	<input checked="" type="checkbox"/> Original Site		

DESCRIBE THE PRESENT AND ORIGINAL (if known) PHYSICAL APPEARANCE

The house is a two story, frame structure of Greek Revival design. The main (north) facade is three bays with the entrance in the east bay. The doorway has top and side-lights. The porch has a pediment and double column supports. At the west end are two story, double external chimneys with free standing stacks. In the gable are double windows between the stacks. Between the stacks is a one story pent.

The west wing is one story and loft with an external one story chimney with a free standing stack.

The windows are 6/6 double hung sash in the main block, 3/3 double hung sash in the pent, and 4/4 double hung sash in the wing.

In plan, the main house has an end hall and double parlors. The door frames are of fluted Greek Revival design with bulls eye blocks at the corners. There are plaster egg and dart ceiling mouldings. <sup>wop</sup> Baseboards are a plain board with a beaded upper edge.

SEE INSTRUCTIONS

**E. SIGNIFICANCE**

PERIOD (Check One or More as Appropriate)

- Pre-Columbian
- 15th Century
- 16th Century
- 17th Century
- 18th Century
- 19th Century
- 20th Century

SPECIFIC DATE(S) (If Applicable and Known) C. 1820

AREAS OF SIGNIFICANCE (Check One or More as Appropriate)

- |   |   |  |  |
|---|---|--|--|
| <input type="checkbox"/> Aboriginal     | <input type="checkbox"/> Education              | <input type="checkbox"/> Political           | <input type="checkbox"/> Urban Planning  |
| <input type="checkbox"/> Prehistoric    | <input type="checkbox"/> Engineering            | <input type="checkbox"/> Religion/Philosophy | <input type="checkbox"/> Other (Specify) |
| <input type="checkbox"/> Historic       | <input type="checkbox"/> Industry               | <input type="checkbox"/> Science             | _____                                    |
| <input type="checkbox"/> Agriculture    | <input type="checkbox"/> Invention              | <input type="checkbox"/> Sculpture           | _____                                    |
| <input type="checkbox"/> Architecture   | <input type="checkbox"/> Landscape Architecture | <input type="checkbox"/> Social/Humanitarian | _____                                    |
| <input type="checkbox"/> Art            | <input type="checkbox"/> Literature             | <input type="checkbox"/> Theater             | _____                                    |
| <input type="checkbox"/> Commerce       | <input type="checkbox"/> Military               | <input type="checkbox"/> Transportation      | _____                                    |
| <input type="checkbox"/> Communications | <input type="checkbox"/> Music                  |  |  |
| <input type="checkbox"/> Conservation   |   |  |  |

STATEMENT OF SIGNIFICANCE

[Empty space for the Statement of Significance]

SEE INSTRUCTIONS  
SEE INSTRUCTIONS

9. MAJOR BIBLIOGRAPHICAL REFERENCES

Empty box for Major Bibliographical References.

10. GEOGRAPHICAL DATA

LATITUDE AND LONGITUDE COORDINATES DEFINING A RECTANGLE LOCATING THE PROPERTY			O R	LATITUDE AND LONGITUDE COORDINATES DEFINING THE CENTER POINT OF A PROPERTY OF LESS THAN TEN ACRES		
CORNER	LATITUDE	LONGITUDE		LATITUDE	LONGITUDE	
	Degrees Minutes Seconds	Degrees Minutes Seconds		Degrees Minutes Seconds	Degrees Minutes Seconds	
NW	° ' "	° ' "		° ' "	° ' "	
NE	° ' "	° ' "		° ' "	° ' "	
SE	° ' "	° ' "		° ' "	° ' "	
SW	° ' "	° ' "		° ' "	° ' "	

APPROXIMATE ACREAGE OF NOMINATED PROPERTY:

Acreage Justification:

LIST ALL STATES AND COUNTIES FOR PROPERTIES OVERLAPPING STATE OR COUNTY BOUNDARIES

STATE:		COUNTY:	

11. FORM PREPARED BY

NAME AND TITLE:  
Christopher Owens, Park Historian

ORGANIZATION: M-NCPPC      DATE: 16 Apr 74

STREET AND NUMBER:  
8787 Georgia Avenue

CITY OR TOWN: Silver Spring      STATE: Maryland

12. State Liaison Officer Review: (Office Use Only)


Significance of this property is:  
 National     State     Local

Signature \_\_\_\_\_

SEE INSTRUCTIONS



) ) )  
P.G.# 84-20  
BELLEVUE

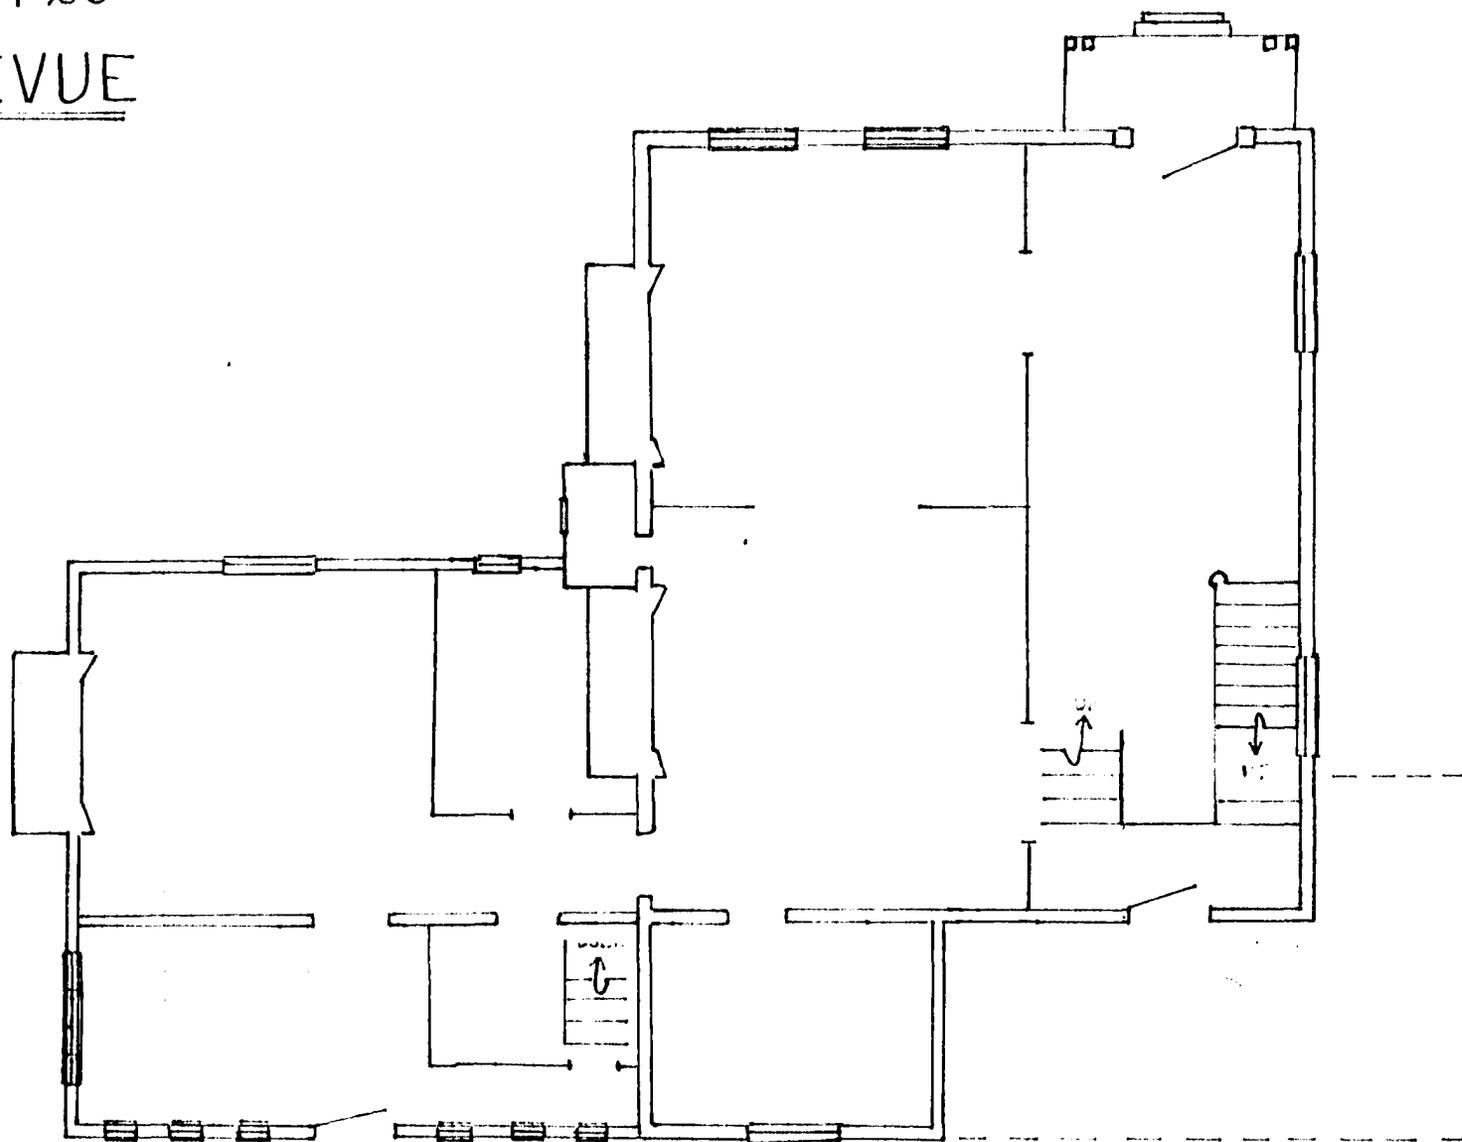


1" = 8'  
(Not exactly to scale)  
sg pearl 11/85



# Bellevue


5.1 acres situated in the center of over 150 acres of undeveloped land; 2500 foot deeded right of way to hard top road.

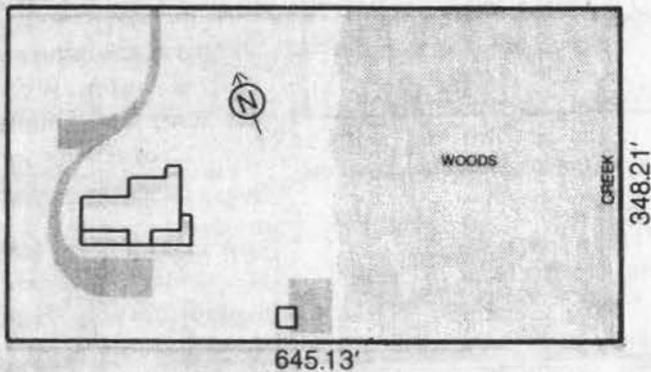


PG: 84-20

1" = 200'


## 1st Floor

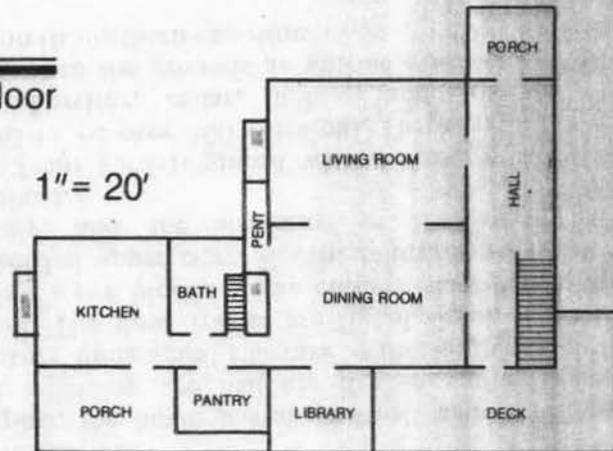

## 2nd Floor

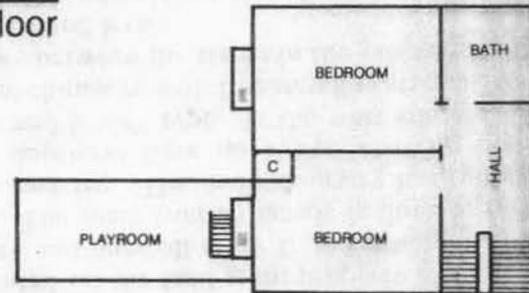

## 3rd Floor

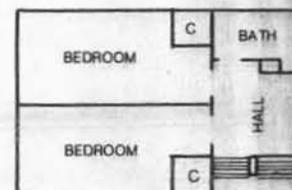

# Bellevue

Financing: Conventional  
Settlement: 90 Days  
Utilities: \$128/month, 1979

Taxes: \$1,100, - 1980  
Size: 2700 sq. ft.; 5.1 acres;  
2500' (right of way)

- Frame structure
- Well and septic (new 1977)
- Storm windows (partial)
- Insulation: walls, ceiling, and floors (1977)
- Basement (170 sq. ft. damp)
- 4 Bedrooms, 3 full baths (1977)
- Library and playroom
- Tool shed; animal shed with paddock
- 5 working fireplaces
- Central air conditioning; heat pump; electric h/w (1977)


Extensive renovation, 1977

House and grounds well kept  
Many large old plantings  
Very private

No garage

No washer/dryer

Kitchen needs renovation

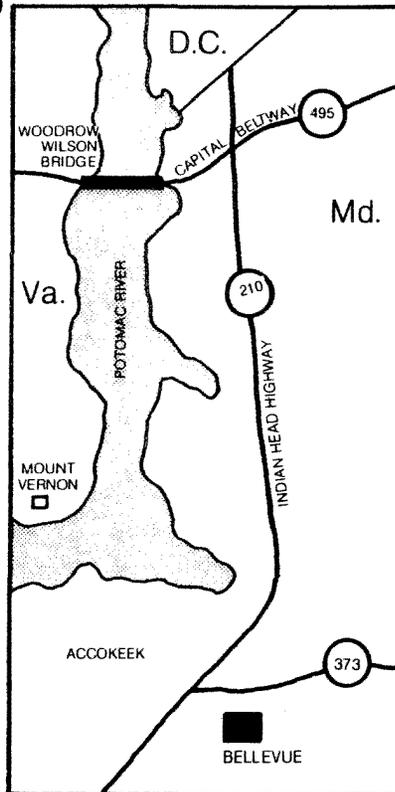

BELLEVUE  
16 miles from the  
Capitol building.

# Bellevue

PG: 84-20

Beall/Marshall House  
Circa 1820

## ARCHITECTURAL DESCRIPTION\*

Located on the land grant property of "Strife," this house is a two and one-half story frame structure of Greek Revival design. The main (north) facade is three bays with entrance in the east bay. The main doorway has top and side lights. Other doorways have no lights, and two doors are of the "Cross and Bible" type. At the west end are two three-story external chimneys with free-standing stacks. There are double windows between the stacks in the gable and a one-story pent on the ground level.

The west wing is a one and one-half story structure with exterior chimney and free-standing stack. There is a small staircase to the loft above.

The windows are 6/6 double hung sash in the main block; 3/3 double hung sash in the pent; and 4/4 double hung sash in the wing.

In plan, the house has an end hall with "land and sea" entry; adjoining the hall are double parlors. There is a three-story hung spiral staircase in the south-east portion of the hall. The door frames are fluted Greek Revival design with bull's eye blocks at the corners. Base boards are plain with beaded upper edge. Recent renovation has been done tastefully, and the ambiance of the house has been maintained.

The front yard is graced with a thriving white ash tree believed to be over 200 years old. There are also numerous large arborvitae, cedar, juniper, and boxwoods adding stateliness to the grounds as well as offering shelter to the house on its northern exposure.

\* Taken largely from records maintained at the Maryland Historic Trust.

## Deming Associates


P.O. Box 196 Accokeek, Maryland 20607 (301) 292-6552


BELLEVUE

PG:84-20

Prince George's County  
Maryland

boundary map, 1986

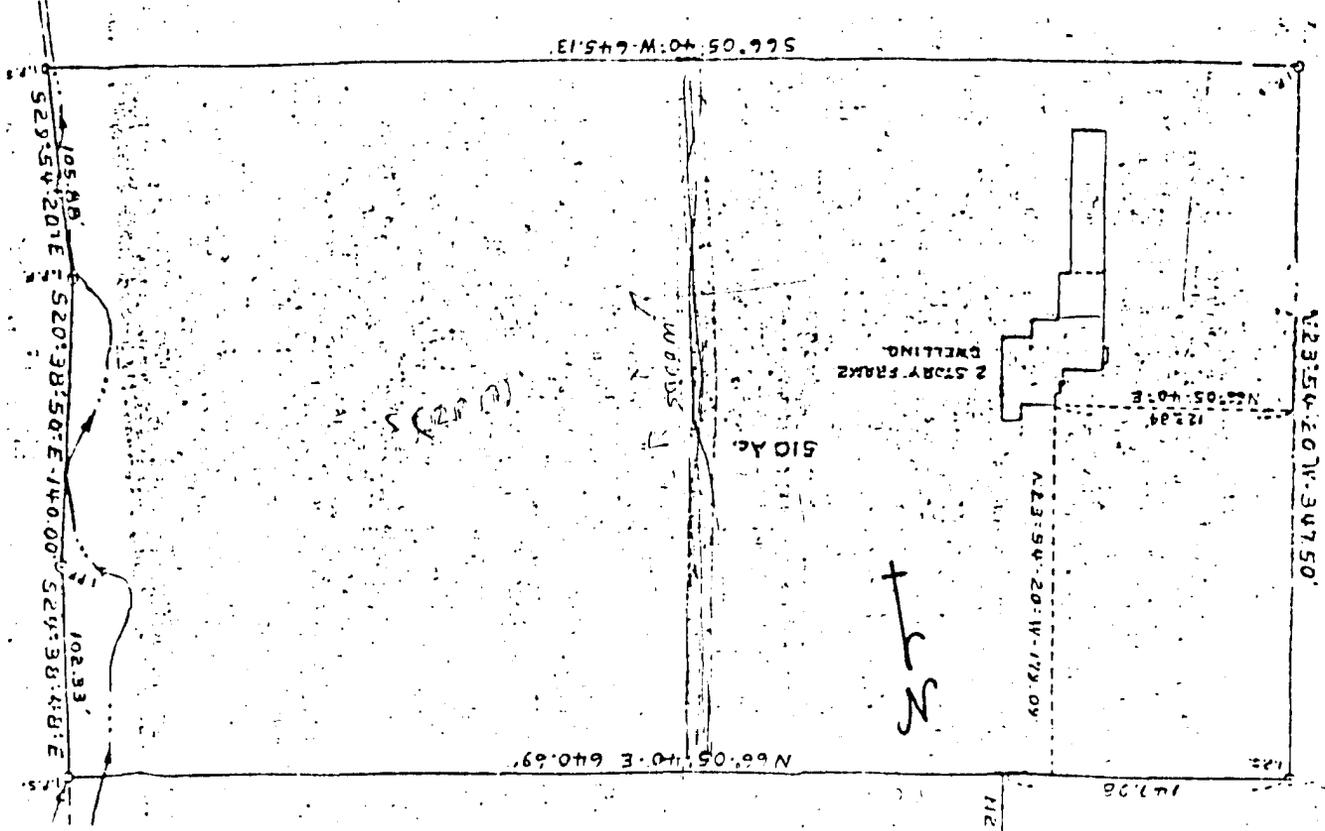

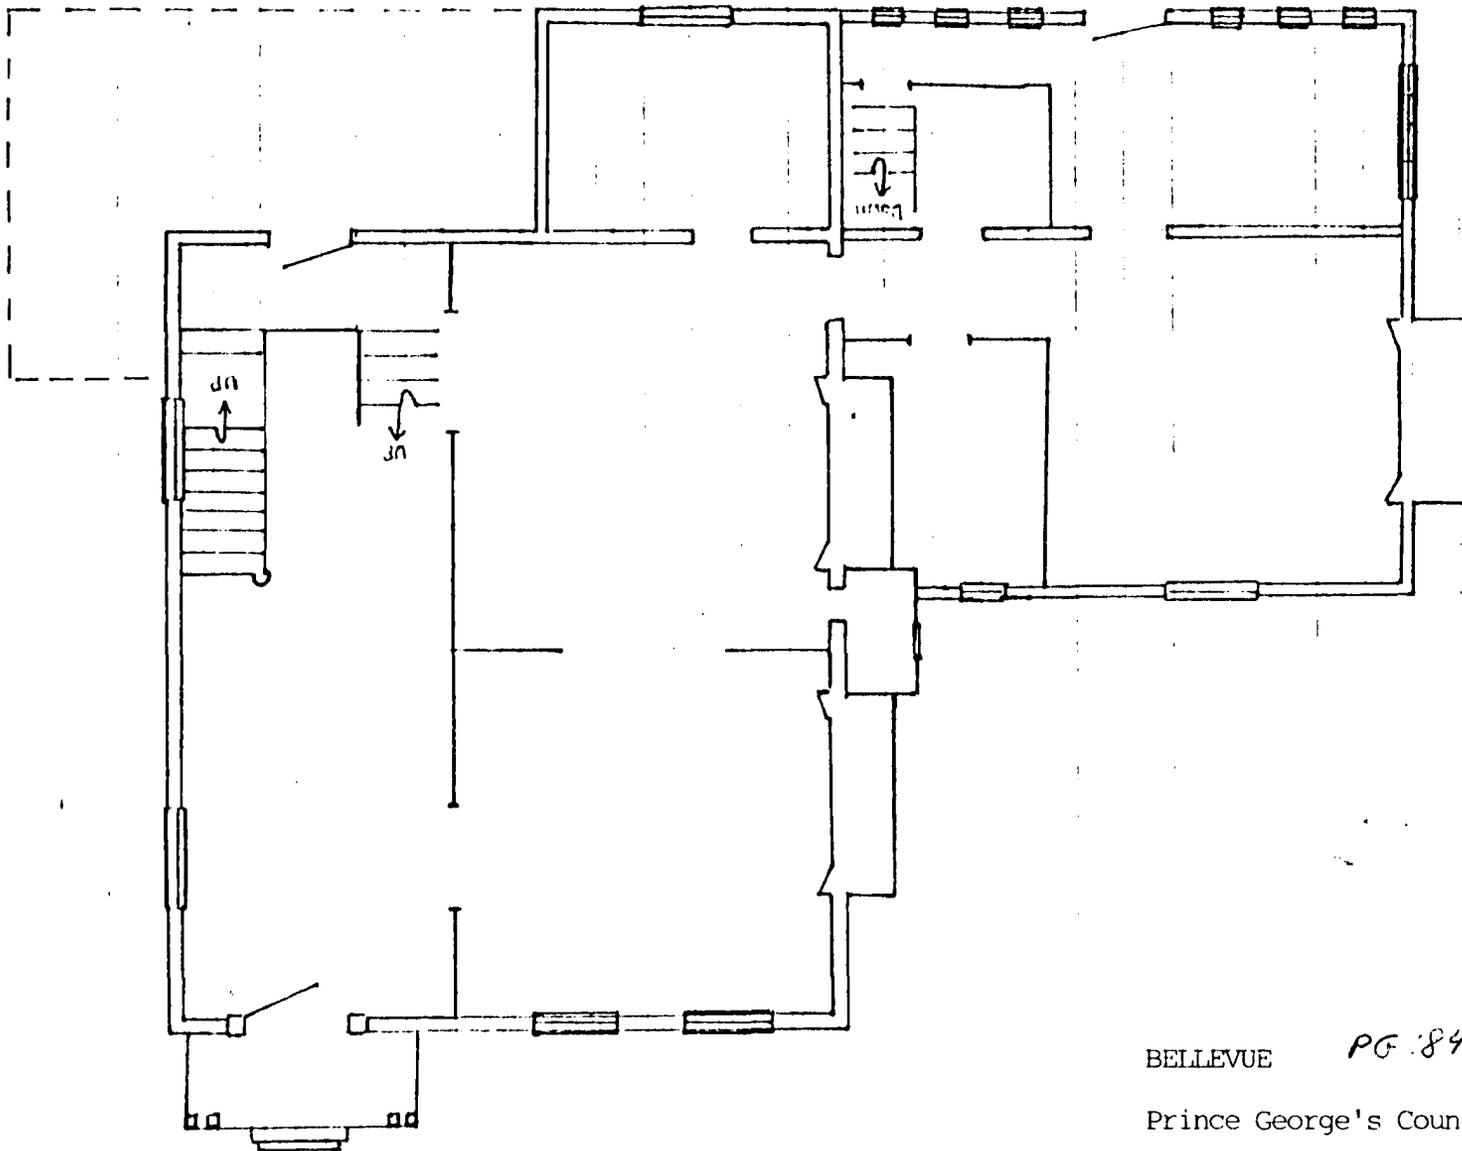

BELLEVUE PG 84-20  
Prince George's County, Maryland  
sketch plan, approx. 1"=8', 1985

Chain of Title

Bellevue P.G.#84-20

#4773:788  
1 June 1977  
Deed

Kenneth and Philippa Shores to Daniel and Madeleine Deming; 5.1 acres, south of Manning Road, in 5th Election District, also right or way

#4105:652  
3 Aug 1972  
Deed

Geraldine G. Wilson to Kenneth and Philippa Shores; 5.1 acres, same acquired by #4041:705

#4041:705  
3 Feb 1972  
Deed

Lenora G. Wilson to Geraldine G. Wilson, 5.1 acres which grantor acquired by #628:368

#628:368  
9 Mar 1942  
Deed

Raymond and Mary T. Johnson to Lenora Wilson; two parcels of land, of which #2 is 360.91 acres of Bellevue (acquired from Menk in 1938, and described also in #188:464); minus three exceptions including two graveyards which total not more than  $\frac{1}{2}$  acre (described in JWB#40:603) leaving a residue to be hereby conveyed of 255 acres

#512:387  
3 Sept 1938  
Deed

Cswin and Hazel Menk, Theodore Menk, Martha Menk, and Gertrude Menk, all of D.C., to Raymond and Mary T. Johnson; two parcels of which #2 is 360.91 acres of Bellevue; minus three exceptions including two graveyards, leaving a residue to be hereby conveyed of 255 acres.

#188:464  
25 Oct 1922  
Deed

Eliza Menk, widow, to Cswin, Theodore, Martha and Gertrude Menk; 360.91 acres of Bellevue conveyed by JWB#40:603.

JWB#40:603  
24 May 1897  
Deed

William, Caroline and James Underwood to Eliza Menk, wife of Rev. R. Menk of Illinois, for \$2400; 360.91 acres of Bellevue, formerly Strife and Ridge, acquired by JWB#37:745 and JWB#35:407, (except two graveyards)

JWB#37:745  
8 Jan 1897  
Deed

Thomas and Anna Underwood to William and James Underwood, for \$1050; 425 acres of Bellevue, formerly Strife and Ridge, part of land acquired by Thomas Marshall in 1823 by AB#2:533.

JWB#35:407  
14 Jan 1896  
Deed

Henry Benzinger, attorney, to Thomas Underwood, 425 acres of Bellevue; Benzinger appointed by Equity Court (#2190) to sell property of McShane, after default in mortgage.

#2190  
Aug 1895  
Equity  
John and Margaret mortgaged property, Bellevue, and defaulted in payments; Henry Benzinger appointed to make sale of property; at sale, 8 Aug 1895, Thomas Underwood is high bidder at \$1050, for 425 acres with "a well built two-story and attic Frame Dwelling with Brick foundation, large Barn, Tenant House and other necessary outbuildings"

JWB#18:262  
30 Mar 1891  
Mortgage  
John and Margaret McShane to Metropolitan Savings Bank of Baltimore; 425 acres of Bellevue; McShane is indebted to Bank \$2000.

ATB#1:94  
1879  
Deed  
Albert Mahone to John McShane, 425 acres of Bellevue

HB#9:553  
1874  
Deed  
Henry and John McShane to Albert Mahone; 425 acres of Bellevue

HB#8:105  
1873  
Deed  
Thomas Hume to Henry and John McShane; 425 acres of Bellevue

HB#7:596  
1873  
Deed  
Samuel B. Hance, trustee, to Thomas L. Hume, 425 acres of Bellevue; Hance appointed by Equity Court (#810) to sell the property of Henrietta and Thomas Marshall, Bellevue, which they mortgaged to him in 1868, and then defaulted in payments.

#810  
1868  
Equity  
Thomas L. Hume vs Henrietta and Thomas Marshall; Marshalls mortgaged their property, Bellevue, to S.B. Hance in 1868 (Hance assigned mortgage to Hume) and then defaulted in mortgage payments; Hance appointed to sell property, Bellevue, 425 acres with "an excellent Dwelling House, containing eight rooms, Kitchen, three Tobacco Houses, Stable, Carriage House, Ice House, etc." and did sell to Thomas L. Hume, high bidder at \$4000.

HB#1:69  
3 Feb 1868  
Thomas and Henrietta Marshall to S.B. Hance, to secure their debt (of \$3398.79) to him, their property, Bellevue, 425 acres, acquired by them on this date.

HB#1:65  
3 Feb 1868  
Deed of Exchange  
John H. Hardisty to Henrietta Marshall, wife of Thomas Marshall; his property, Bellevue, 425 acres (same property which Hardisty acquired by AB#12:223, 525 acres originally, but minus one parcel of 76 acres to Julianna White, AB#11:497, and another of 24 acres to John Manning,

CN#1:385, reducing total acreage to 425 acres, and also excepting two burial grounds, separated from each other, one for whites and one for colored persons, not more than  $\frac{1}{4}$  acre total, with egress and ingress guaranteed to John Hardisty; this property, Bellevue, 425 acres, is Hardisty's present residence); and Marshalls in turn convey to Hardisty their interest in the Marlborough Hotel, which they acquired by HB#1:67 from S.B.Hance, trustee under Deed of Trust from Medley and Dyer, proprietors of said Hotel.

AB#12:223  
19 April 1839  
Deed

Richard H. and Harriet M. Marshall of Frederick County to John H. Hardisty of Prince George's County, for \$3500, part of two tracts, Strife and Ridge, which were conveyed to Thomas Marshall, deceased, father of Richard H. Marshall, by Mundell and McElderry, 1823 by AB#2:533 (except 76 acres sold to J. White)

AB#2:533  
14 April 1823  
Deed

Thomas Mundell and Hugh McElderry to Thomas Marshall of Charles County, 525 acres of Strife and Ridge, formerly lands of Josias F. Beall; grantors were appointed trustees to sell the real estate of Josias F. Beall, did sell to Thomas Marshall in 1817 for \$8268.75, payment has now been made, so trustees now execute this deed.

#140  
1823  
Old Equity

Thomas Marshall vs. McElderry and Mundell; McElderry and Mundell were appointed executors of estate of Josias F. Beall; Marshall was high bidder at sale of Beall's property; he now asks for legal conveyance of property.

TT#1:194  
18 Nov 1816  
Will

Testator, Josias Fendall Beall; devises to brother James Alexander Beall, to nephew, etc., residue of real estate to brother James Alexander Beall, executor.

JRM#17:52  
22 July 1816  
Deed of Trust

Josias F. Beall to Horatio McElderry, in trust, his lands including Strife and Ridge which he purchased from his two brothers, Robert A. and Benjamin B. Beall; to secure his debt to McElderry.

JRM#17:45  
27 April 1816  
Deed of Trust


Josias F. Beall to William Marshall and Thomas Mundell, in trust, his lands, including Strife and Ridge which he purchased from his two brothers, Robert A. and Benjamin B. Beall, because Marshall and Mundell have cosigned note drawn by Beall.

Unrecorded Deed  
21 Sept 1809  
Deed

Robert Augustus Beall and Benjamin Bradley  
Beall to their brother Josias Fendall Beall,  
for \$10,000, ca 800 acres in Prince George's  
and Charles Counties, including Strife

T#1:376  
12 Mar 1803  
Will

Testator, Josias Beall; to son Robert  
Augustus Beall, part of Strife, "whereon  
I live", plus adjoining lands in Prince  
George's County; to John Bradley Beall,  
Ann Fendall Beall and Benjamin B. Beall,  
other lands in Charles, Prince George's  
and Montgomery Counties; to son Josias  
Fendall Beall and son James Alexander Beall,  
remaining estate to be divided equally;  
three sons, Robert A., Josias F., and James A.  
Beall, executors.

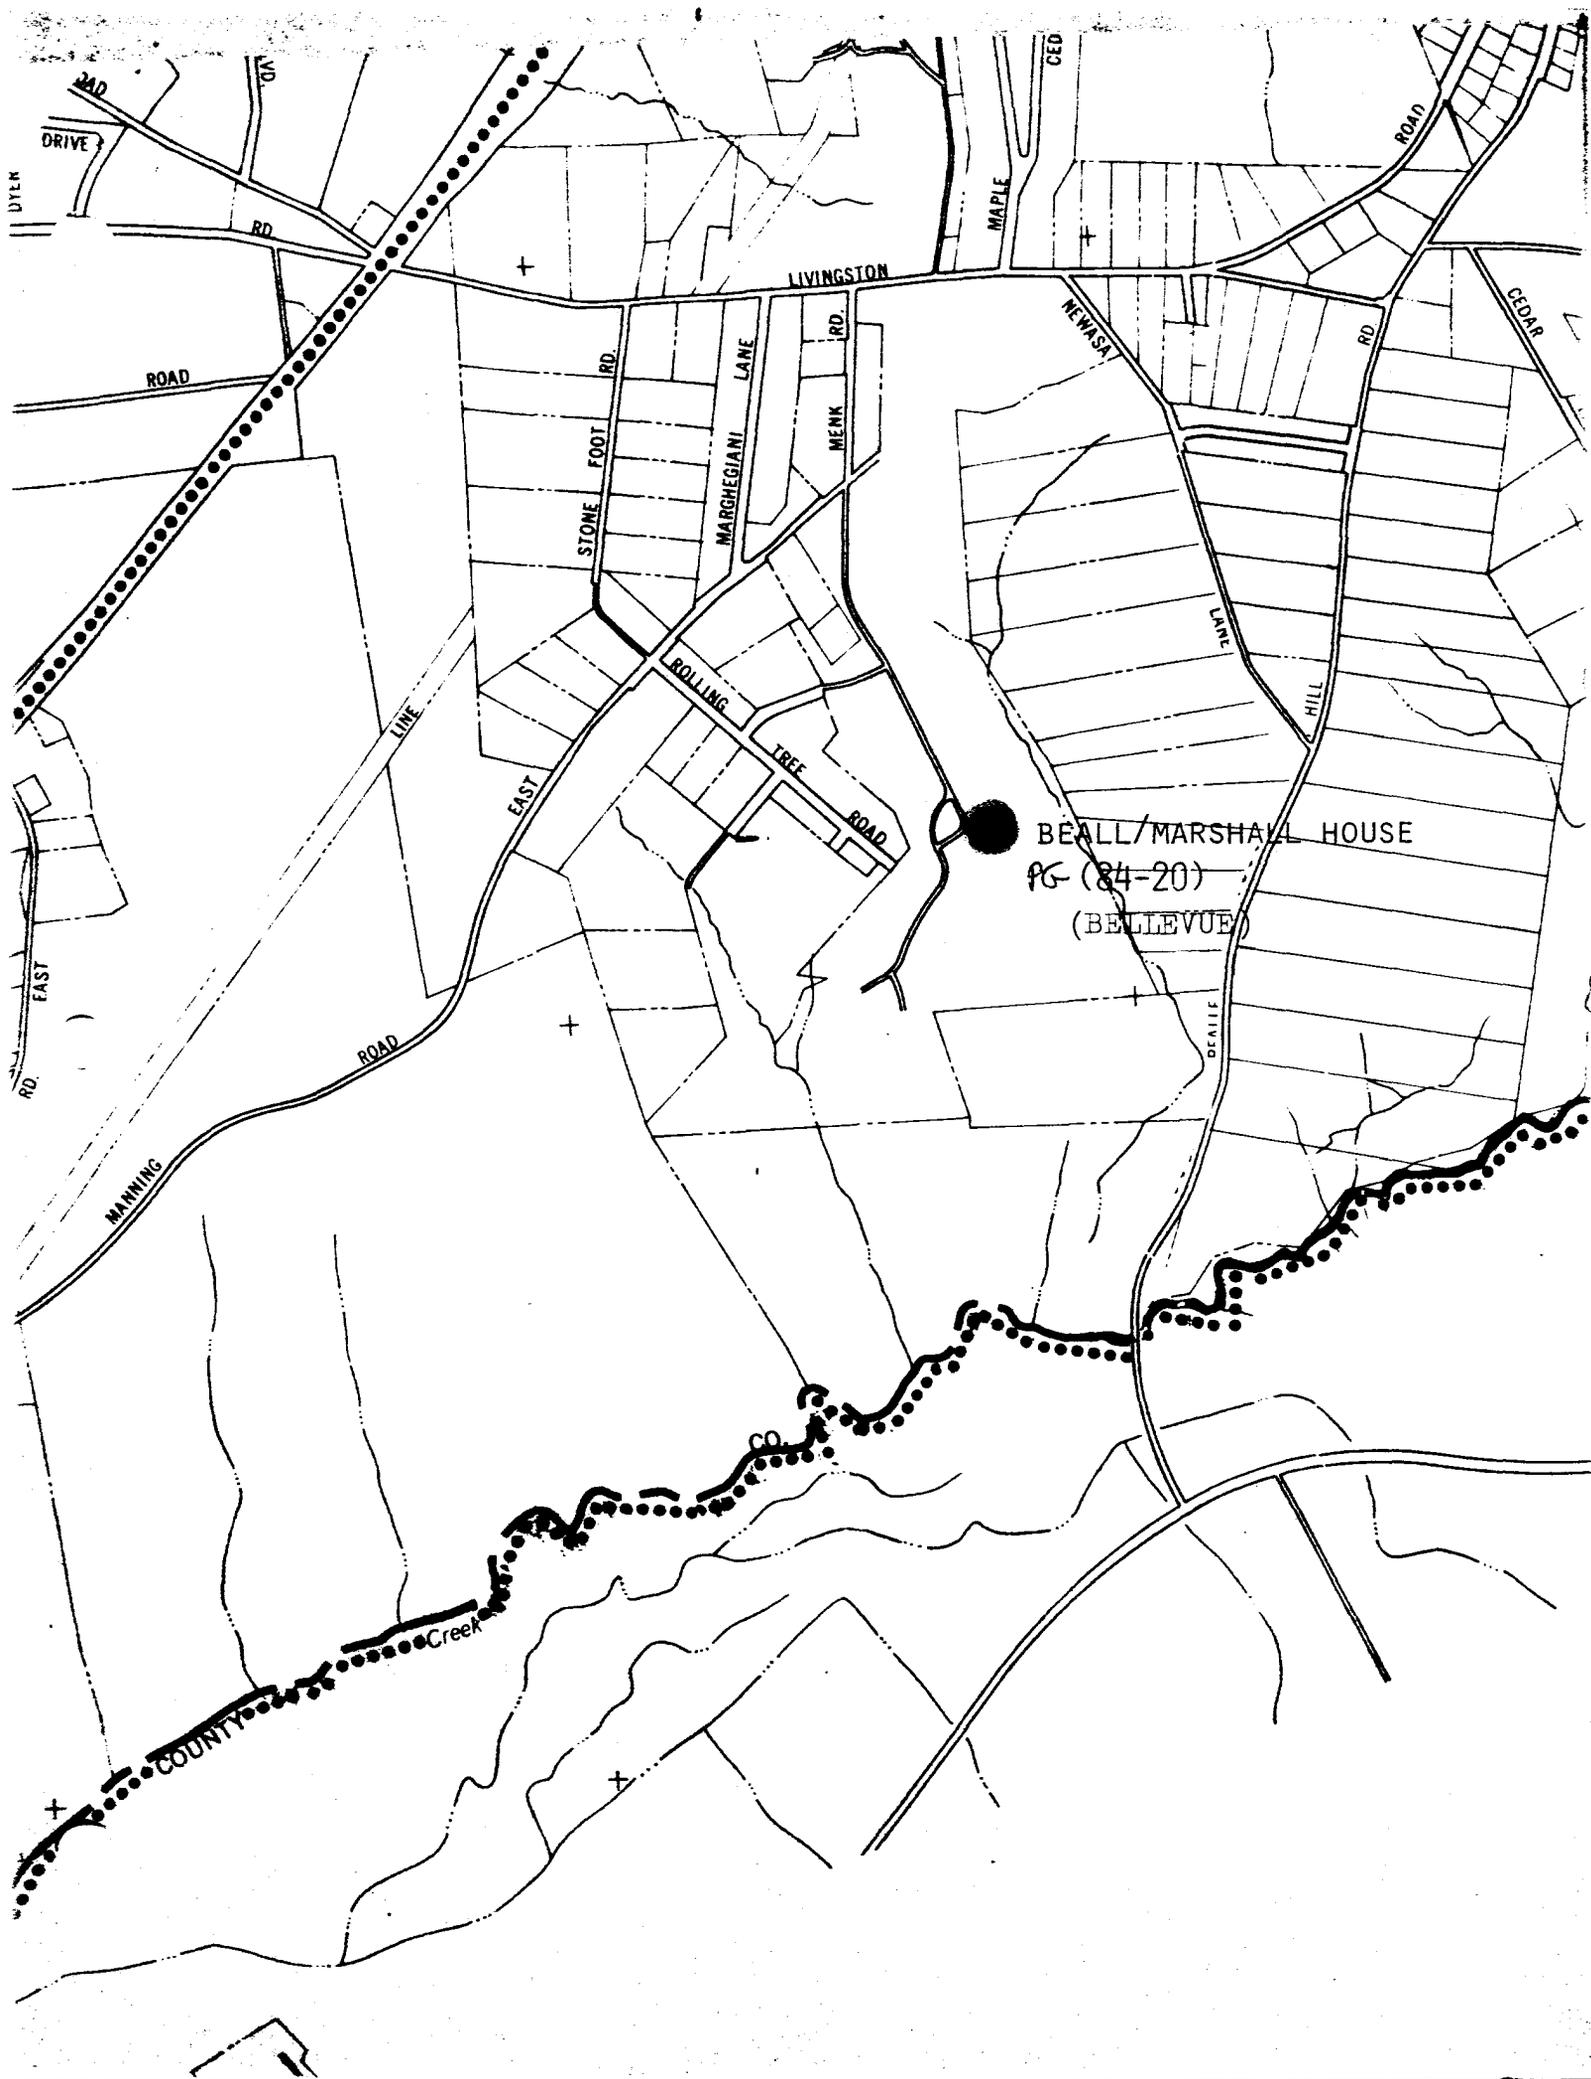

BEALL/MARSHALL HOUSE  
PG (84-20)  
(BELLEVUE)

DYE DRIVE

ROAD

LIVINGSTON

STONE FOOT RD

MARGHEGIANI LANE

MENK RD

NEWSA

RD

GEDAR

LINE

EAST

ROLLING

TREE

ROAD

LANE

HILL

EAST


ROAD

MANNING

BEALL

Creek

COUNTY

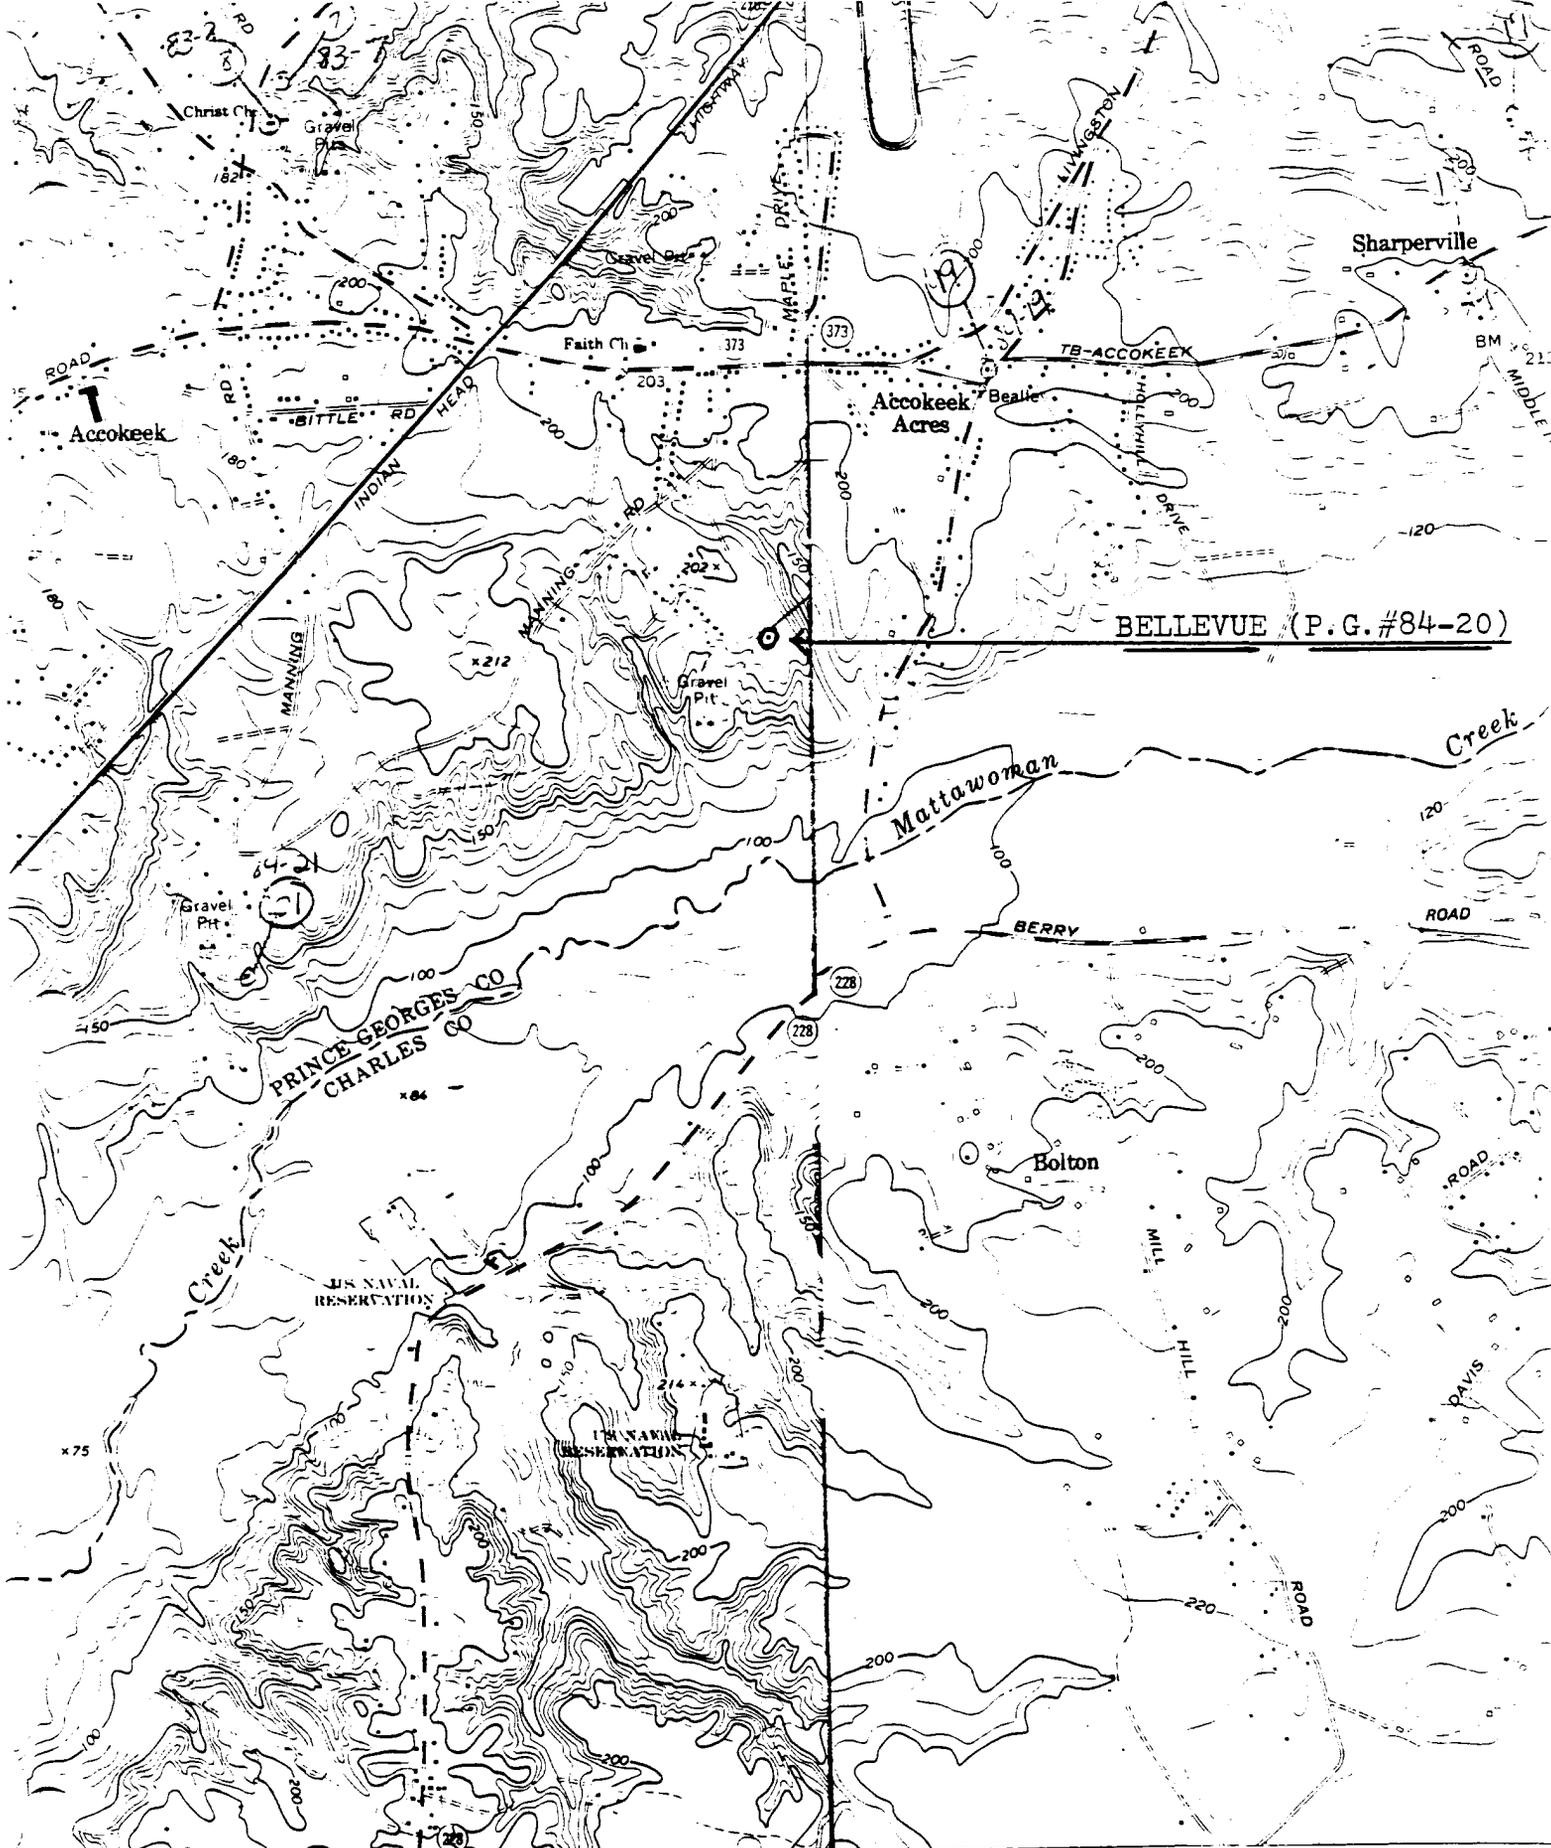

2 420 000 FEET (VA)      INTERIOR GEOLOGICAL SURVEY WASHINGTON      1971      77 00'      325000m E      327      328


**Mount Vernon (Section I)**

Discataway  
 Mapped by the Army Map Service  
 Edited and published by the Geological Survey (Section G)

ROAD CLASSIFICATION

Heavy-duty	—————	Light-duty	—————
Medium-duty	- - - - -	Unimproved dirt	.....

Control by USGS and USC&GS  
 Culture and drainage in part compiled from aerial photographs  
 taken 1943      Topography by planetable surveys 1944

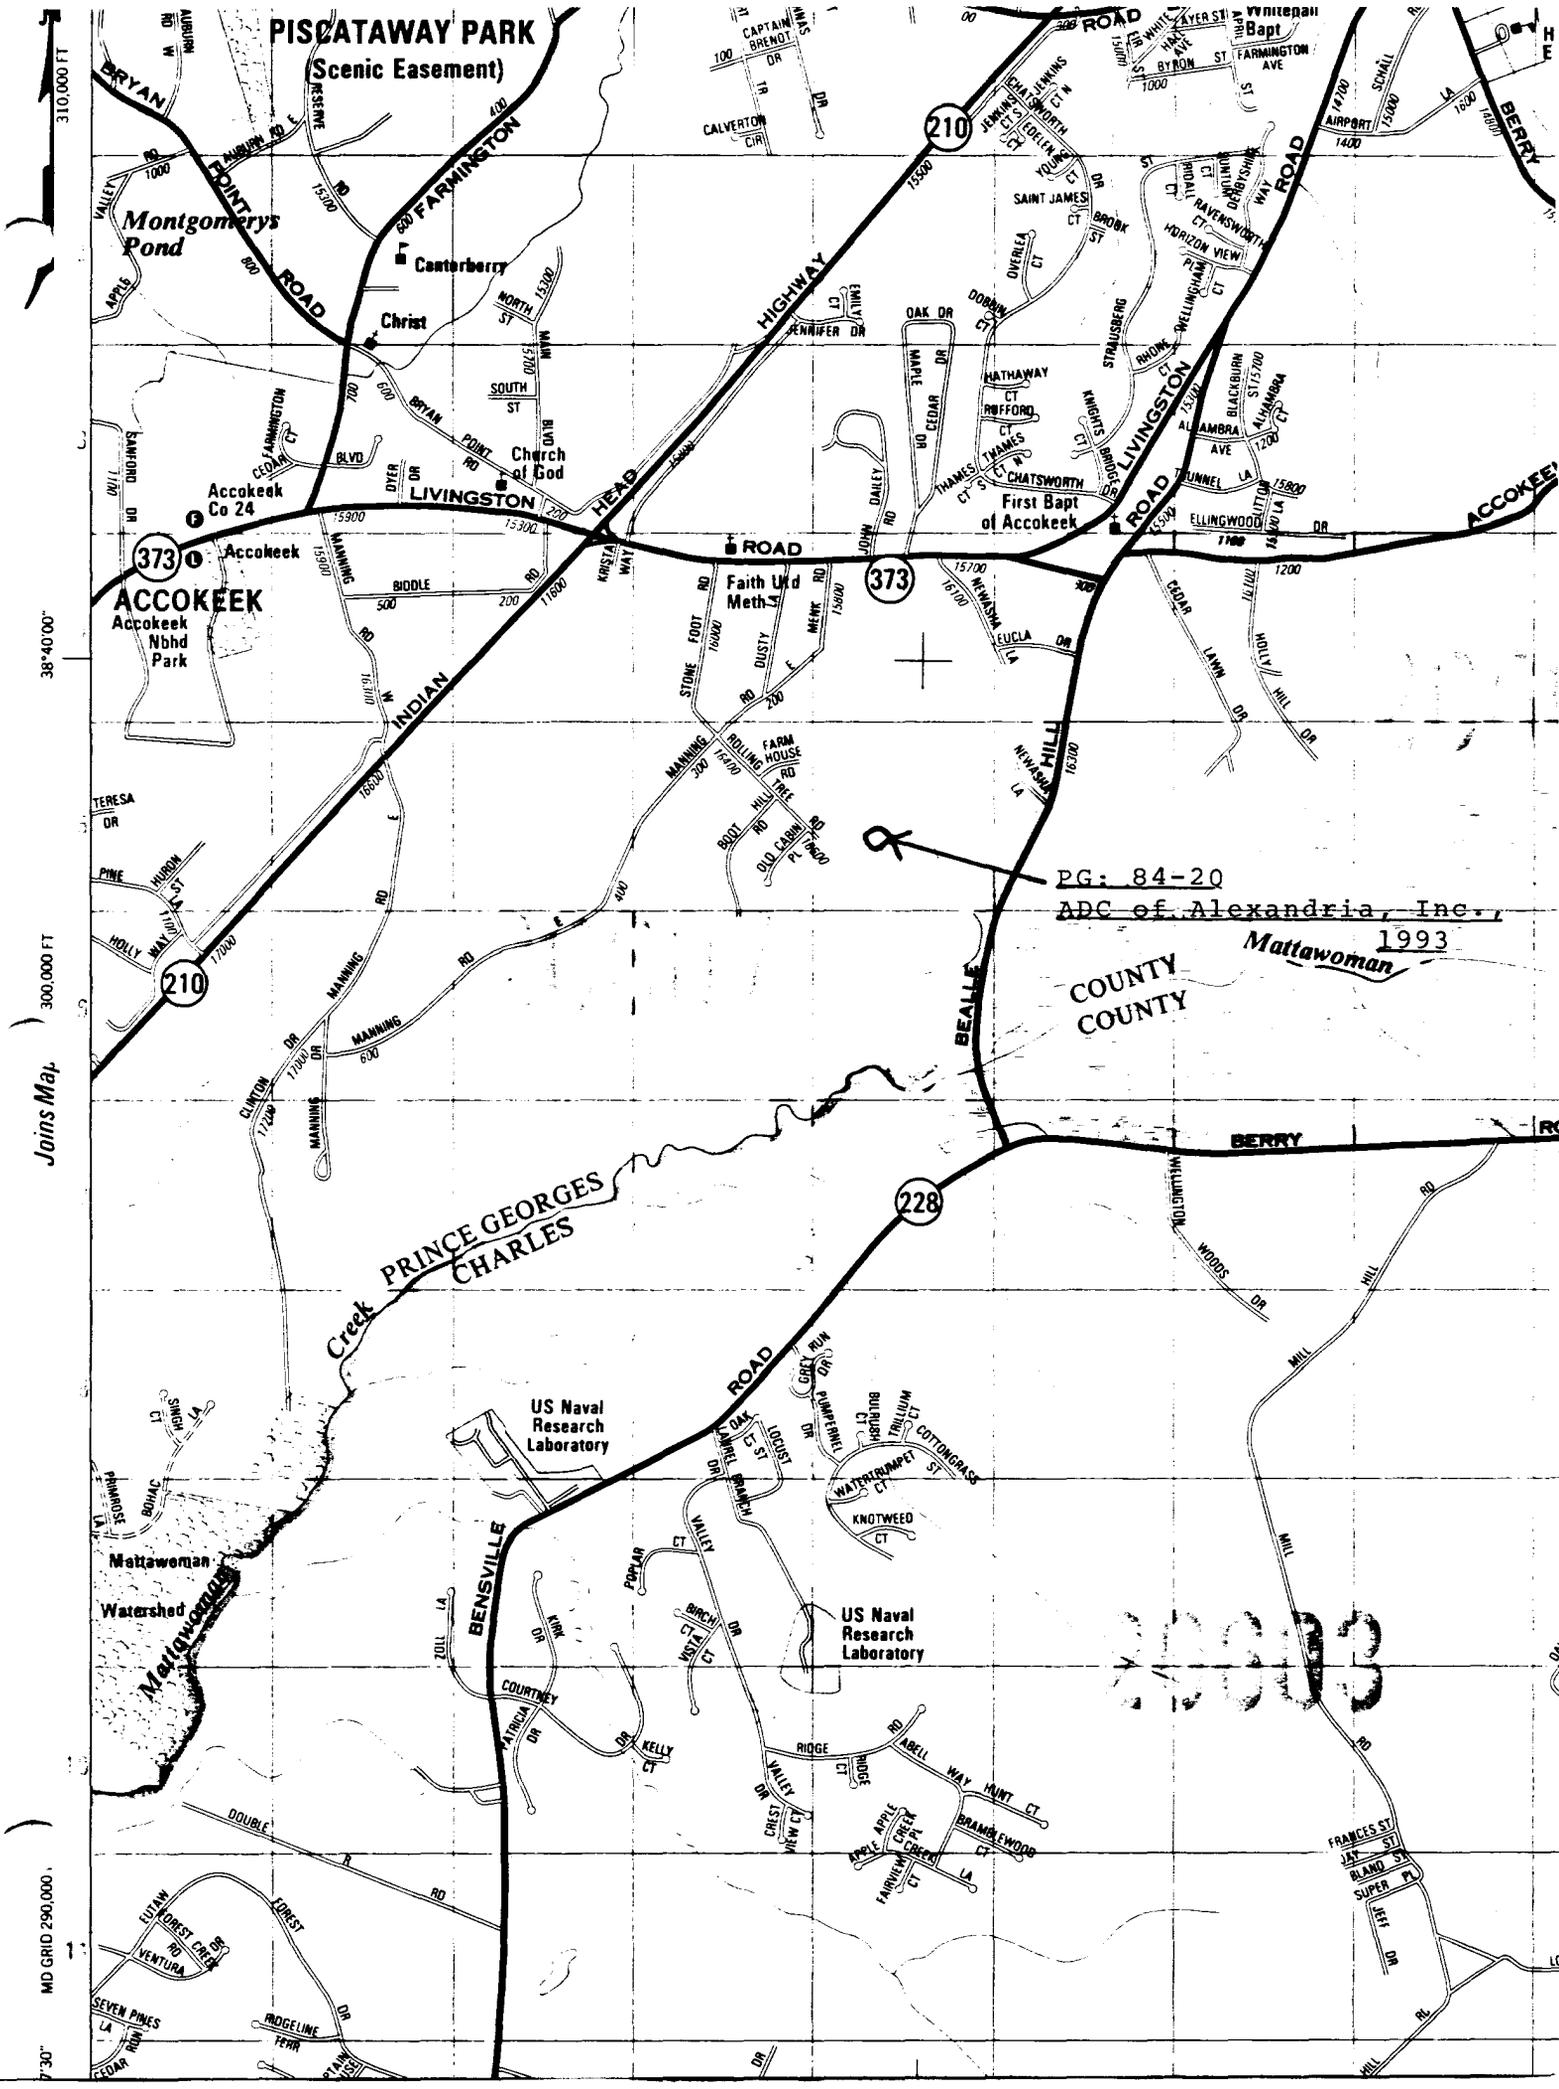

**PISCATAWAY PARK**  
(Scenic Easement)

Montgomerys Pond

**ACCOKEEK**  
Accokeek Nhd Park

Faith Utd Meth

PG. 84-20  
ADC of Alexandria, Inc.

Mattawoman 1993

COUNTY  
COUNTY

US Naval Research Laboratory

US Naval Research Laboratory

20013

Joins Map.

MD GRID 290,000

7'30"

38°40'00"


300,000 FT

310,000 FT

BRYAN



POINT

ROAD

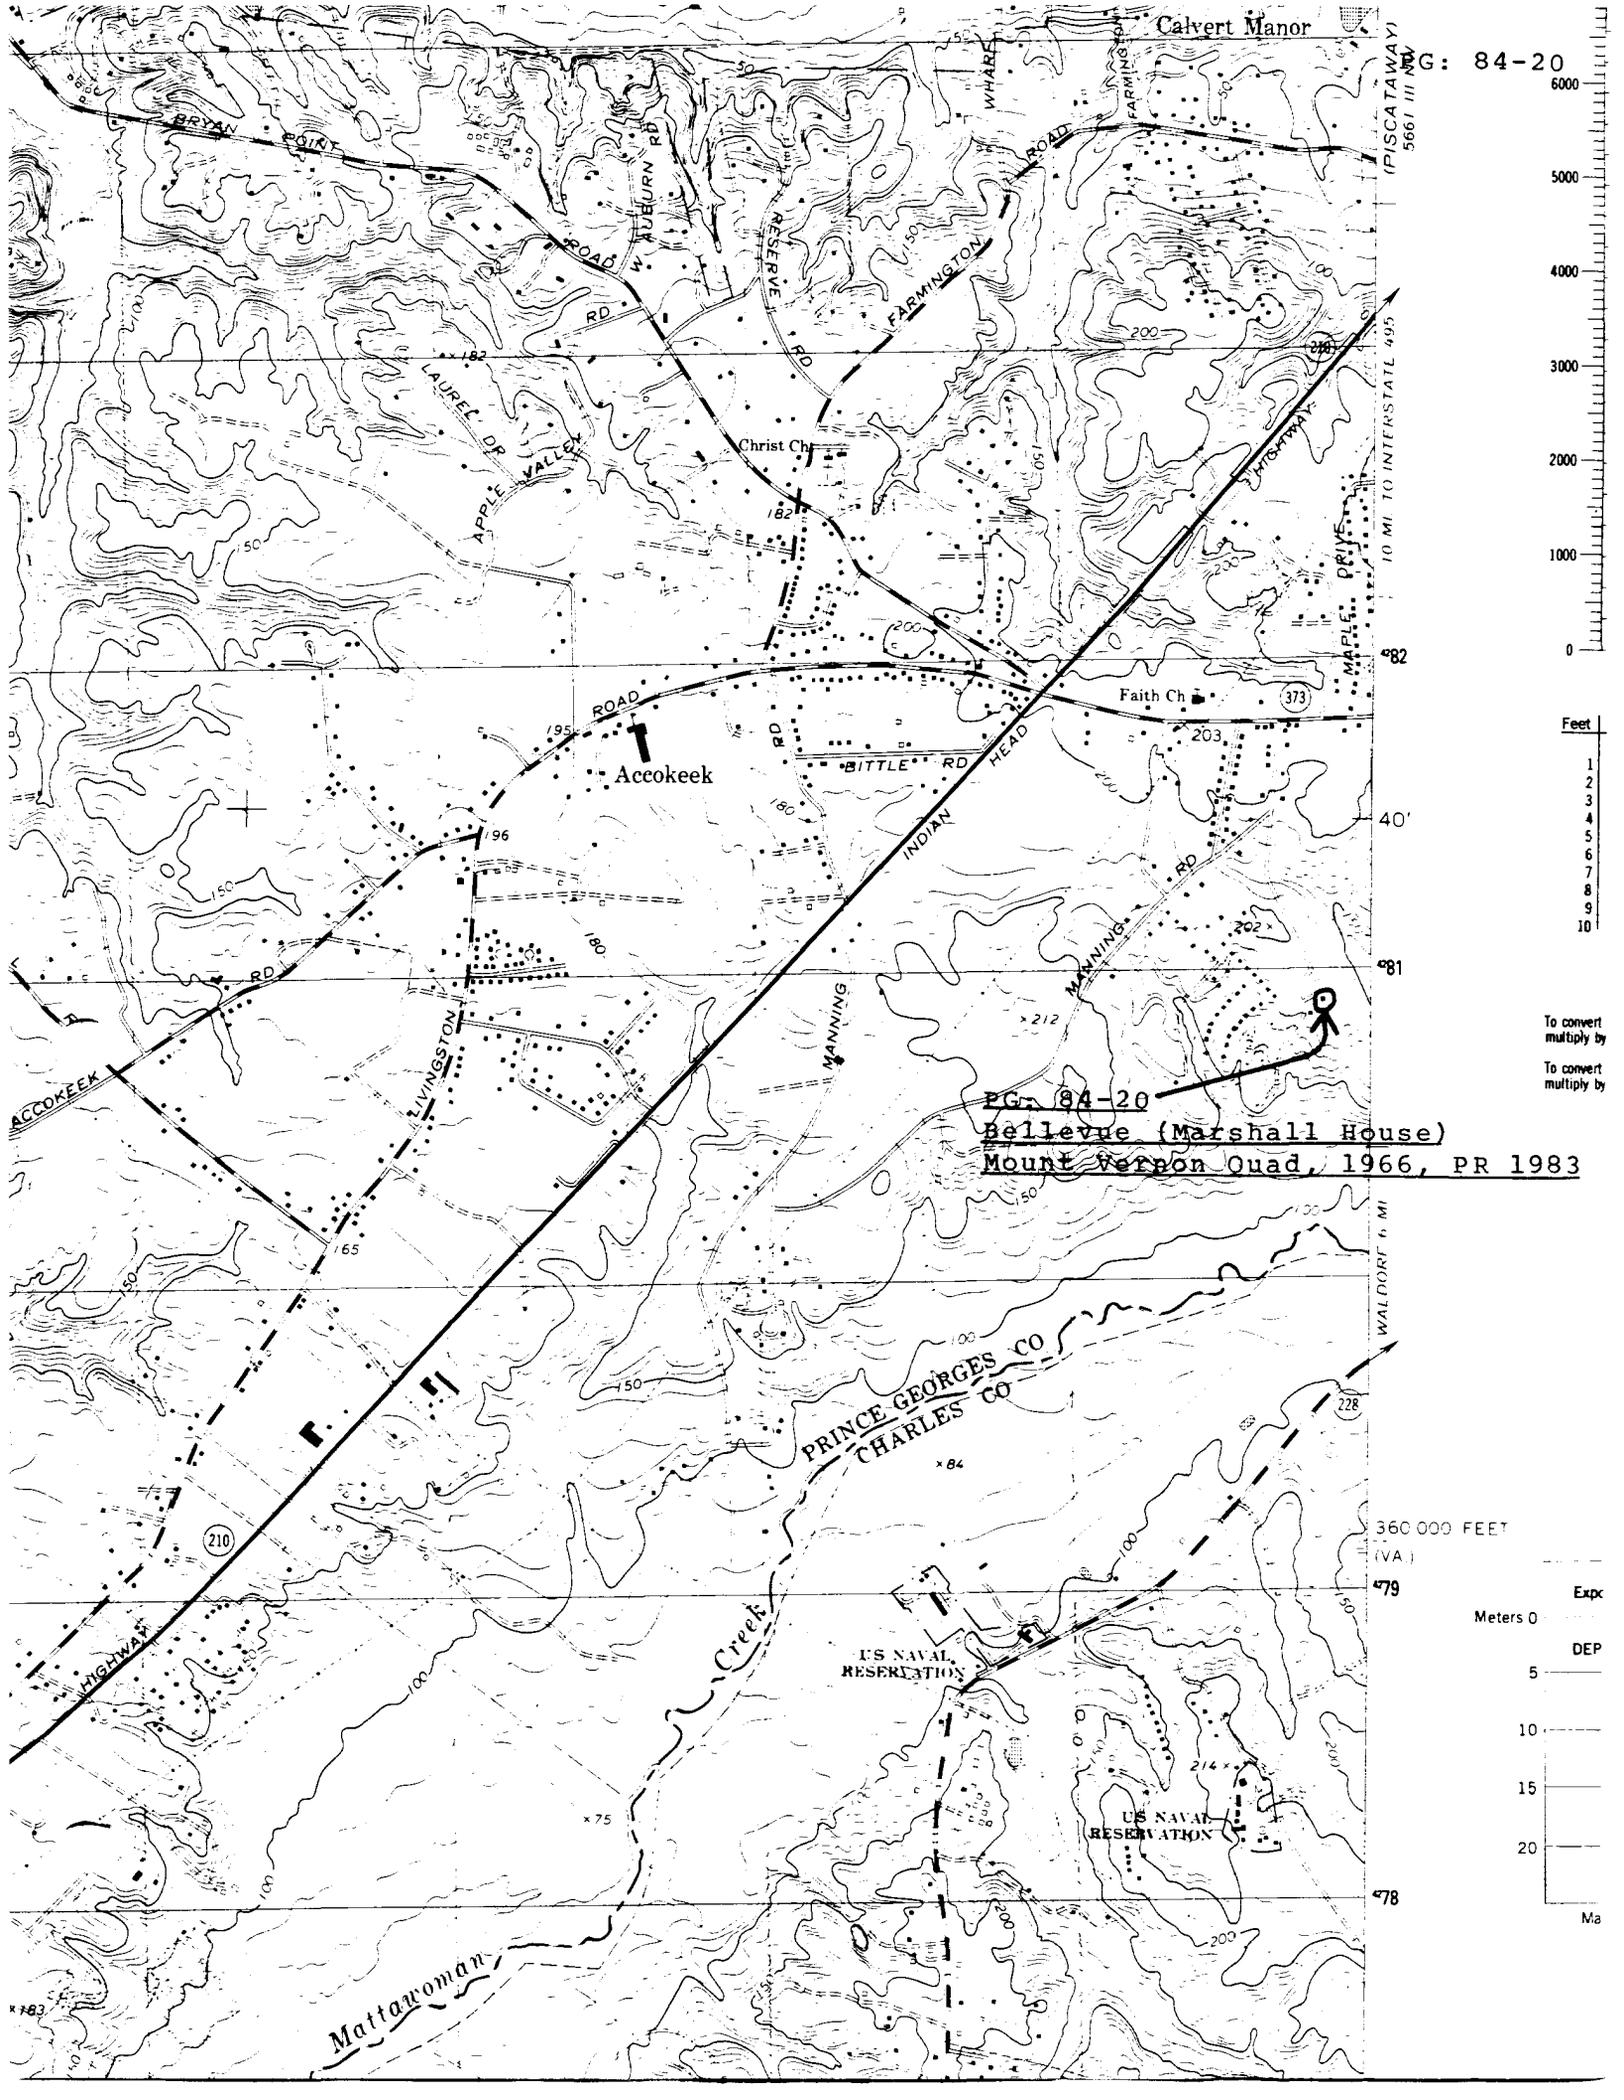

PG: 84-20


(PISCATAWAY)  
5661 III NW



To convert multiply by  
To convert multiply by

PG: 84-20  
Bellevue (Marshall House)  
Mount Vernon Quad, 1966, PR 1983

360 000 FEET  
(VA)

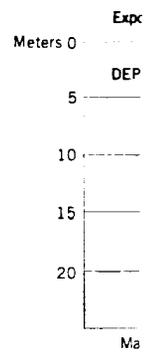

479  
478

Ma



NAME BELLEVIEW (BEALL) MARSHALL

PG: 84-20

LOCATION MANNING Rd. ACCOKEEK, Md.

FACADE NE

PHOTO TAKEN 4/16/74 M DWYER